
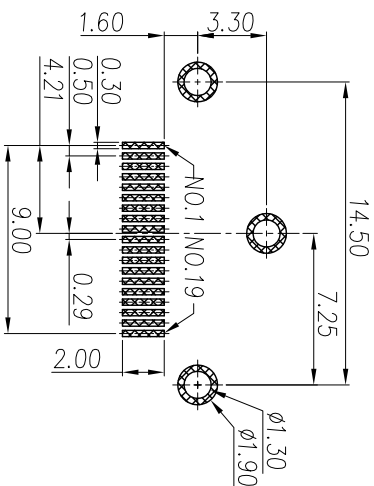


REV.	ECN NO.	DESCRIPTION	DRAW	CHECK	APPD.	DATE
A0		新版发行	MICHAEL	Song	Jobs	2017.05.16

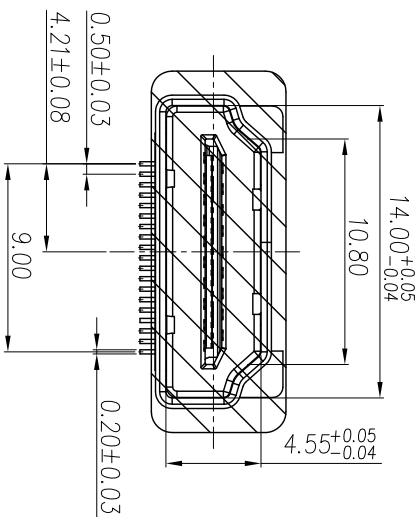

NOTES:

1.) MATERIAL:

- 1-1. HOUSING AND COVER: LCP UL 94V-0, COLOR: BLACK;
- 1-2. CONTACT: COPPER ALLOY T=0.20;
- 1-3. SHELL: BRASS&SPCC T=0.50;



2.) FINISH:

- 2-1. CONTACT: Au PLATING ON CONTACT AREA, (SEE P/N DESCRIBING) MATTE PURE Sn 100u" Min. PLATING ON SOLDER TAILS, 50u" MIN. Ni UNDERPLATING OVERALL;

3.) SPECIFICATIONS:

- 3-1. VOLTAGE RATING: 40V
 - 3-2. CURRENT RATING: 0.5A
 - 3-3. INSULATION RESISTANCE: 100MEG.OHM MIN
 - 3-4. CONTACT RESISTANCE: 30MILL.OHM MAX
 - 3-5. OPERATION TEMPERATURE: -20° TO +85°
 - 3-6. INSERT FORCE: 44.1N MAX
 - 3-7. EXTRACT FORCE: 9.8~44.1N
 - 3-8. DURABILITY: 1500 CYCLES
- 4.) PART No.:

RECOMMENDED P.C.B. LAYOUT(T=1.60mm)
TOLERANCES UNLESS OTHERWISE SPEC. ±0.05

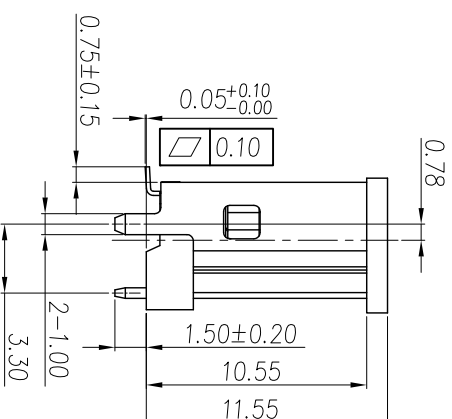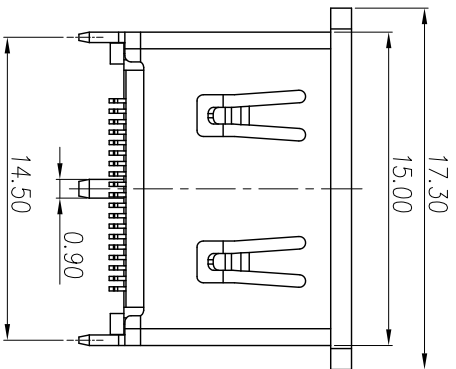

料号备注

CH	0	F	003	M	×	×	R	×	×	×	×
----	---	---	-----	---	---	---	---	---	---	---	---

- 12=半金雾锡1u"
- 13=半金雾锡3u"
- 14=半金雾锡5u"
- 15=半金雾锡15u"
- 16=半金雾锡30u"

00=ICP黑铁壳镀镍

R=ROHS2.0标准
W=无卤+ROHS2.0
I=REACH标准

B=盐雾24H
C=盐雾48H



东莞市兴科杰鑫电子有限公司
Dong Guan XingKeJieXin Electronics Co.,Ltd

UNLESS OTHERWISE SPECIFIED TOLERANCES			APPROVAL		日期	品名	IDMT A FEMALE VERTICAL, SMT 19P DTP脚长1.50mm (不带支架)		
METRIC			制图	Michael	2017.05.16	规格			
X, +/-	+/-	0.30	审核						
.X, +/-	+/-	0.25	核准						
.XX, +/-	+/-	0.15	文件位置						
ANGLES +/-	+/-	2.00°	料号						
DIMENSIONS			字张		工程图号:		DWG-USBAF-357		
(METRIC)	(MM)		A4	比例	1 : 1	状态码	A	页数	1 OF 1
			ANG LE OF PROJECTION		SEE TABLE		版本: A0		