
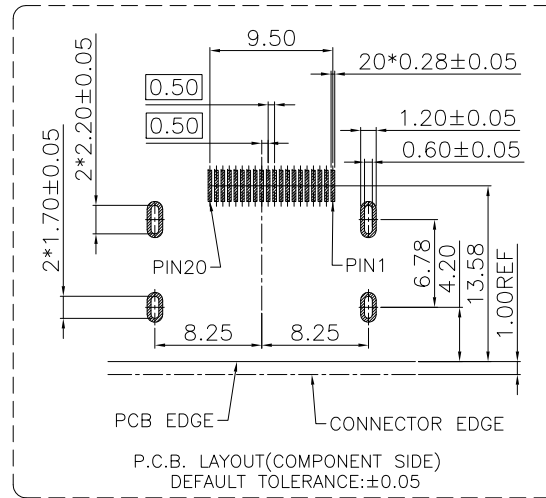


HSF Compliant

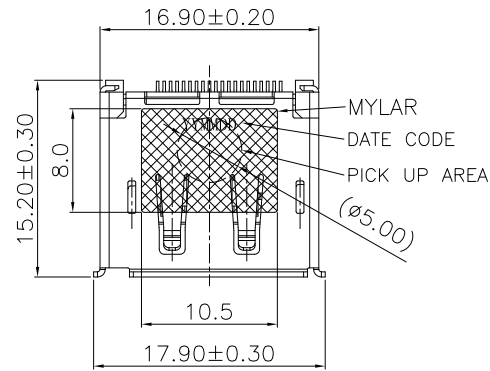

SPECIFICATIONS:

- 1.0 Electrical Performance:
 - 1.1 Contact current Rating: 0.5 Amperes min.
 - 1.2 Dielectric Withstanding Voltage: AC500V(rms) 1 minue.
 - 1.3 Insulation resistance: 100M ohms Min.
 - 1.4 Contact Resistance: 30m ohm Max.
 - 1.5 Voltage Rating : 40 Vac (rms).
- 2.0 Mechanical Performance:
 - 2.1 Insertion force: 44.1N Max.
 - 2.2 Withdrawal force: 9.8N Min.
 - 2.3 Durability: 10000 cycle.
- 3.0 Environmental Performance:
 - 3.1 Temperature Range:
 - 3.1.1 Operating Temperature: -25°C to $+85^{\circ}\text{C}$.
 - 3.1.2 Resistance to reflow soldering heat 260 $^{\circ}\text{C}$ min, 10s.
 - 3.2 Salt Spray 48h for contact gold & shell Nickel
- 4.0 Material:
 - 4.1 Plastic: high temperature plastic, UL94-V0, Color Black.
 - 4.2 Contact: Copper alloy.
 - 4.3 Shell: Copper alloy.
- 5.0 Plating:
 - 5.1 Contact: (SEE TABLE) Au Plated on contact area Matte Tin 100u" Min Plated on solder area Nickel 30u" Min underplating over all.
 - 5.2 Shell: Ni Plated 30u" min

料号备注

CP 0 F 001 M XX R XX XX

PACK-R0087

I2=半金雾锡10"
I3=半金雾锡30"
I4=半金雾锡50"
I5=半金雾锡150"
I6=半金雾锡300"

00=LCP黑铜壳电镀

R=ROHS2.0标准
W=无卤+ROHS2.0
H=REACH标准

B=盐雾24H
C=盐雾48H



东莞市兴科杰鑫电子有限公司
Dong Guan XingKeJieXin Electronics Co., Ltd

UNLESS OTHERWISE SPECIFIED
TOLERANCES

.X +/- 0.35
.XX +/- 0.25
.XXX +/- 0.15
FRACTIONS +/-
ANGLES +/- 2.00°

DIMENSIONS
(METRIC) (MM)

APPROVAL

制图 HL.W

审核

核准

文件位置

ANGLE OF PROJECTION

第一角投影

第二角投影

第三角投影

第四角投影

日期

2020.11.09

品名

规格

料号

字长

工程图号:

A4

比例

1 : 1

DISPLAY PORT RECEPTACLE SMT

SEE TABLE


DWG-CPAF-001

版本


A0

状态码 A

页数 1 OF 1

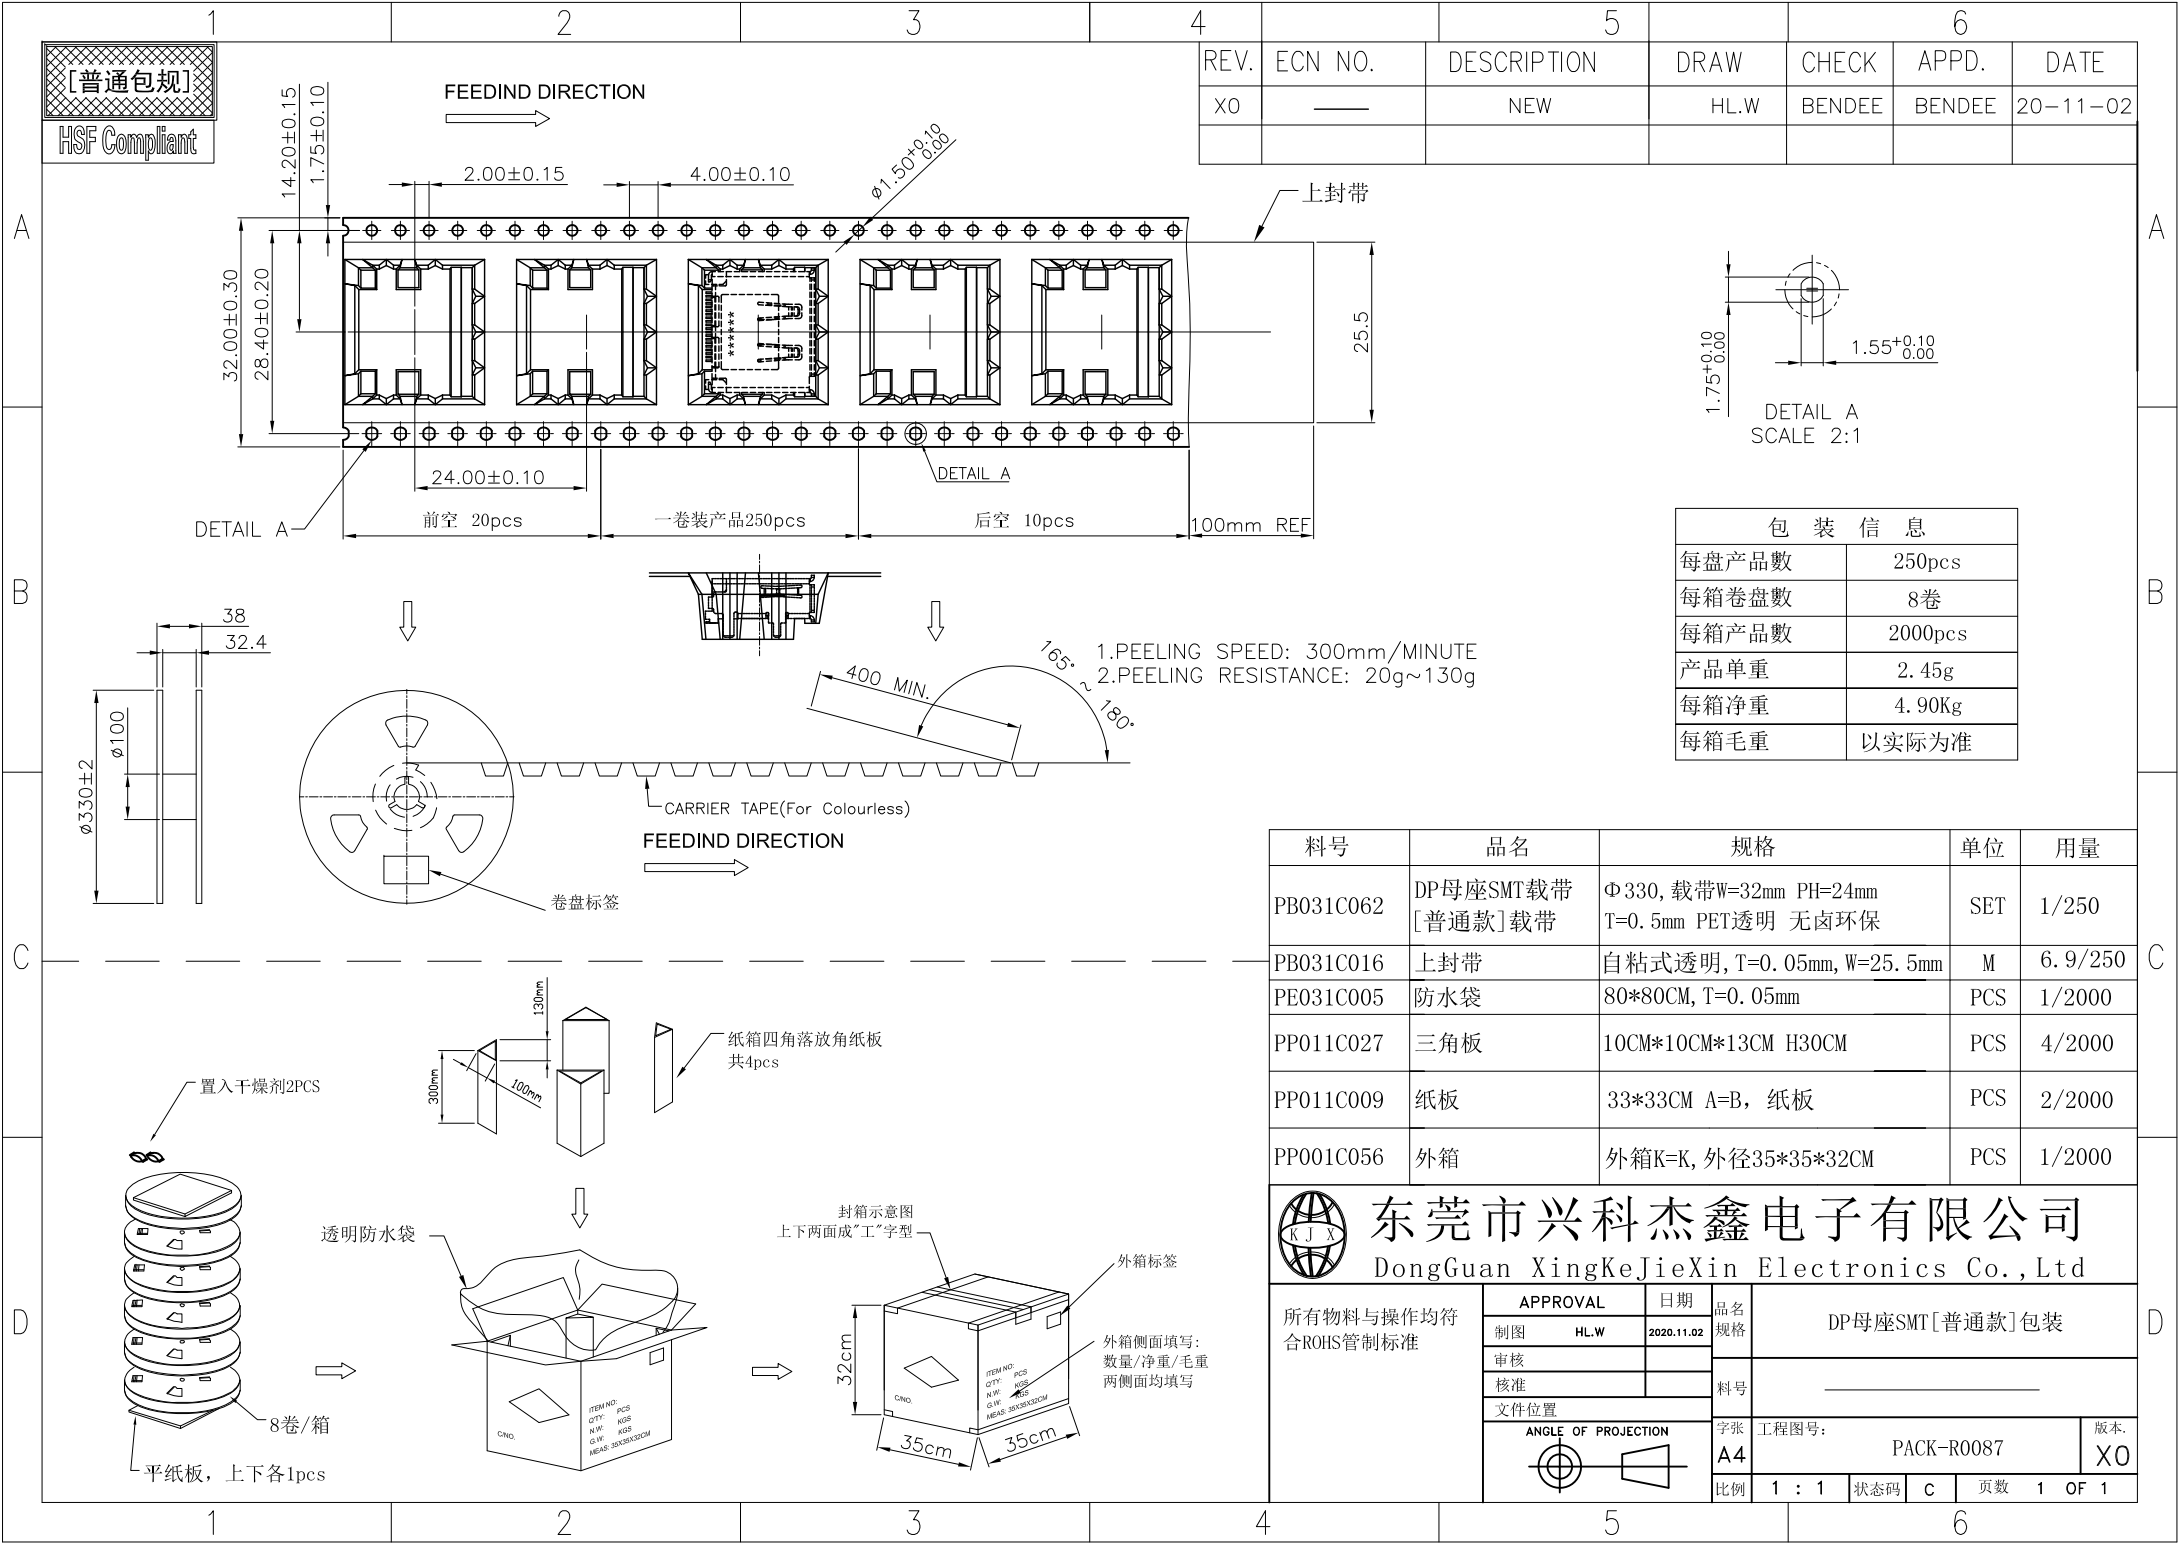

REV.	ECN NO.	DESCRIPTION	DRAW	CHECK	APPD.	DATE
X0	—	NEW	HL.W	BENDEE	BENDEE	20-11-02



包 装 信 息	
每盘产品数	250pcs
每箱卷盘数	8卷
每箱产品数	2000pcs
产品单重	2.45g
每箱净重	4.90Kg
每箱毛重	以实际为准

料号	品名	规格	单位	用量
PB031C062	DP母座SMT载带 [普通款]载带	Φ 330, 载带W=32mm PH=24mm T=0.5mm PET透明 无卤环保	SET	1/250
PB031C016	上封带	自粘式透明, T=0.05mm, W=25.5mm	M	6.9/250
PE031C005	防水袋	80*80CM, T=0.05mm	PCS	1/2000
PP011C027	三角板	10CM*10CM*13CM H30CM	PCS	4/2000
PP011C009	纸板	33*33CM A=B, 纸板	PCS	2/2000
PP001C056	外箱	外箱K=K, 外径35*35*32CM	PCS	1/2000



东莞市兴科杰鑫电子有限公司
DongGuan XingKeJieXin Electronics Co., Ltd

所有物料与操作均符合ROHS管制标准	APPROVAL	日期	品名规格	DP母座SMT[普通款]包装		
	制图 HL.W	2020.11.02	料号			
	审核		工程图号:	PACK-R0087		
	核准		版本:	X0		
	文件位置	ANGLE OF PROJECTION	比例	1 : 1	状态码	C
				页数	1	OF 1