



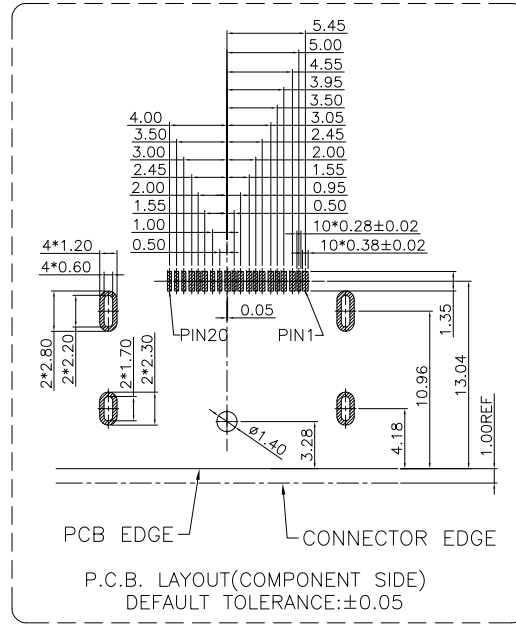
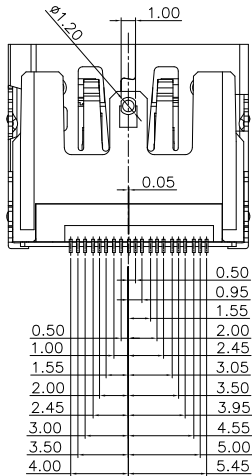
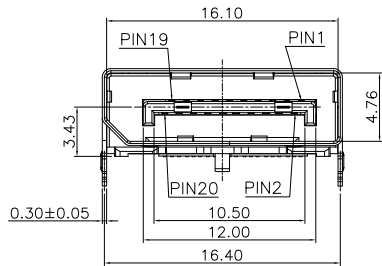


HSF Compliant

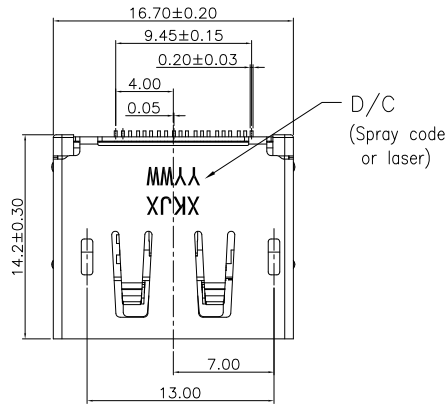

REV.	ECN NO.	DESCRIPTION	DRAW	CHECK	APPD.	DATE
A0	--	First drawing	Yin	Linson	Rambo	2023.12.20

SPECIFICATIONS:

- Electrical Performance:
 - Contact current Rating: 0.5 Amperes min.
 - Dielectric Withstanding Voltage: AC500V(rms) 1 minue.
 - Insulation resistance: 100M ohms Min.
 - Contact Resistance: 30m ohm Max.
 - Voltage Rating : 40 Vac (rms).
- Mechanical Performance:
 - Insertion force: 44.1N Max.
 - Withdrawal force: 9.8N Min.
 - Durability: 10000 cycle.
- Environmental Performance:
 - Temperature Range:
 - Operating Temperature: -25°to+85°.
 - Resistance to reflow soldering heat 260°min, 10s.
 - Salt Spray see table
- Material:
 - Plastic: high temperature plastic, UL94-V0, Color Black.
 - Contact: Copper alloy.
 - Shell: Stainless steel.
 - EMI: Stainless steel.
- Plating:
 - Contact: (SEE TABLE) Au Plated on contact area Matte Tin 100u"Min Plated on solder area Nickel 30u"Min underplating over all.
 - Shell: Ni Plated 30u"min
 - EMI: No Plated

料号备注

CP 0 F 045 M XX X XX XX X

R=PACK-R0xxx

12=半金雾锡10U"

13=半金雾锡30U"

14=半金雾锡50U"

15=半金雾锡15U"

16=半金雾锡30U"

00=LCP黑钢壳镀镍

R=ROHS2.0标准

W=无卤+ROHS2.0


B=盐雾24H

C=盐雾48H



东莞市兴科杰鑫电子有限公司

Dong Guan XingKeJieXin Electronics Co., Ltd

UNLESS OTHERWISE SPECIFIED TOLERANCES		APPROVAL		日期	品名		规格		DISPLAY PORT REC SMT 带柱 (UHBR20)						
		制图	Yin	2023.12.20	料号				SEE TABLE						
		审核	Linson	2023.12.20											
		核准	Rambo	2023.12.20											
		文件位置					字张						工程图号:		版本.
ANGLE OF PROJECTION															
															
DIMENSIONS									A4		DWG-CPAF-045		A0		
(METRIC)	(MM)								比例		1 : 1	状态码	A	页数	1 OF 1

