
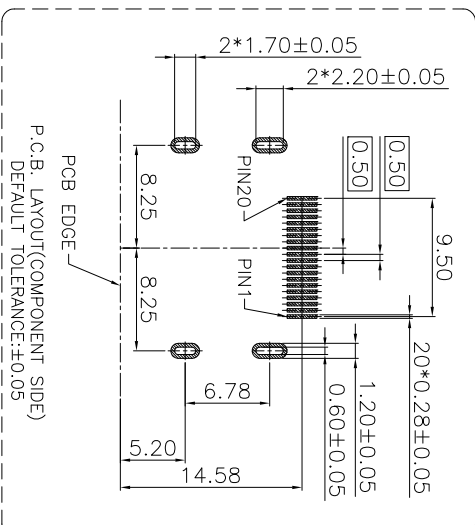



REV.	ECN NO.	DESCRIPTION	DRAW	CHECK	APPD.	DATE
X0	—	新板发行	HL.W	BENDEE	BENDEE	2020.11.11

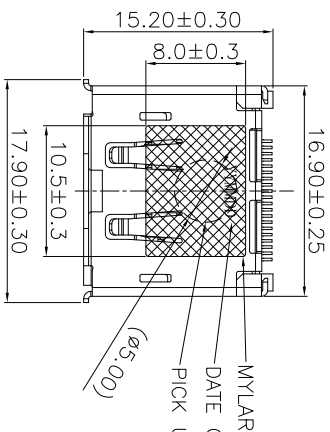

- SPECIFICATIONS:
- Electrical Performance:
 - Contact current Rating: 0.5 Amperes min.
 - Dielectric Withstanding Voltage: AC500V(rms) 1 minue.
 - Insulation resistance: 100M ohms Min.
 - Contact Resistance: 30m ohm Max.
 - Voltage Rating : 40 Vac (rms).
 - Mechanical Performance:
 - Insertion force: 4~1N Max.
 - Withdrawal force: 9.8N Min.
 - Durability: 10000 cycle.
 - Environmental Performance:
 - Temperature Range:
 - Operating Temperature: -25to+85°.
 - Resistance to reflow soldering heat 260°min,10s.
 - Salt Spray 48h for contact gold&shell Nicke
 - Material:
 - Plastic: hight temperature plastic, UL94-V0, Color Black.
 - Contact: Copper alloy.
 - Shell: Copper illoy.
 - Plating:
 - Contact: (SEE TABLE) Au Plated on contact area
Matte Tin 100u"Min Plated on solder area
Nickel 30u"Min underplating over all.

5.2 Shell: Ni Plated 30u"min




料号备注

CP 0 F 002 M X X X X X X X X

12=半金雾锡1U"	
13=半金雾锡3U"	
14=半金雾锡5U"	
15=半金雾锡15U"	
16=半金雾锡30U"	
27=镀硬铬30U"±2U"金	

00=ICP黑铜壳镀镍	
-------------	--

R=ROHS2.0标准	B=盐雾24H
W=无卤+ROHS2.0	C=盐雾48H
L=ROHS3标准	

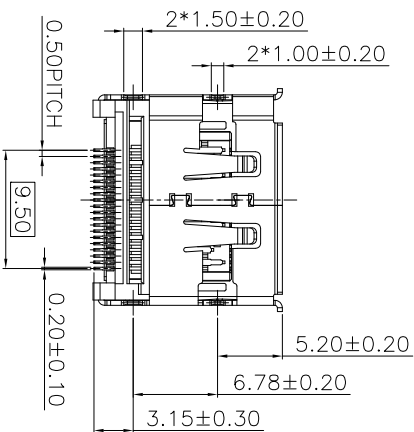

东莞市兴科杰鑫电子有限公司
Dong Guan XingKeJieXin Electronics Co.,Ltd

UNLESS OTHERWISE SPECIFIED TOLERANCES		APPROVAL		品名	
METRIC		制图	HL.W	规格	DISPLAY PORT RECEPTACLE SMT
.X	+/-	审核			SCREW HOLE
.XX	+/-	核准		料号	SEE TABLE
.XXX	+/-				
FRACTIONS	+/-				
ANGLES	+/-				
	2.00°				
DIMENSIONS		ANGLE OF PROTECTION		字张	
(METRIC)	(MM)			工程图号:	DWG-CPAF-002
				比例	1 : 1
				状态码	A
				页数	1 OF 1
				版本	X0