
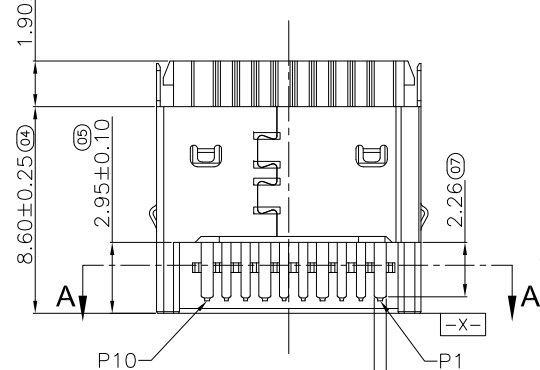





HSF Compliant

REV.	ECN NO.	DESCRIPTION	DRAW	CHECK	APPD.	DATE
A0	—	NEW	Leiny	BENDEE	BENDEE	18-04-26


4-0.80±0.15 for P1,P10,P11,P20 ②
16-0.50±0.15 for others ②

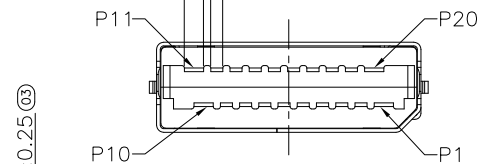

[For P1,P4,P7,P10,
P11,P14,P17,P20]

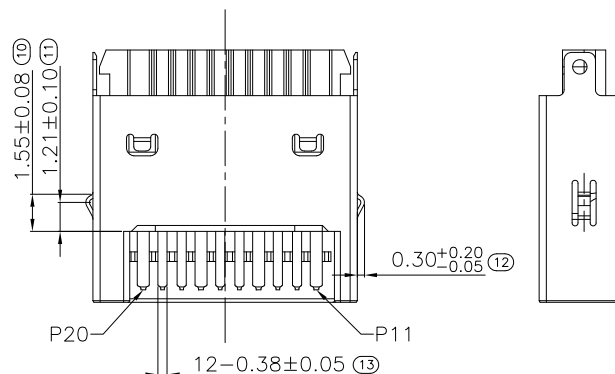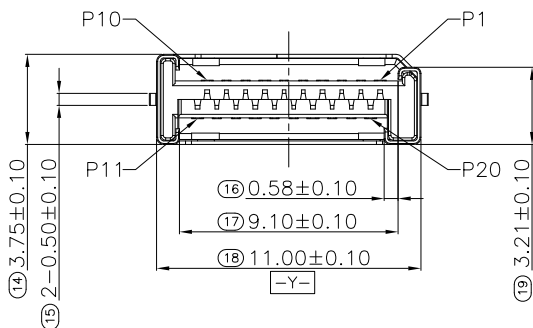

[For P2,P3,P5,P6,P8,P9,P12,
P13,P15,P16,P18,P19]

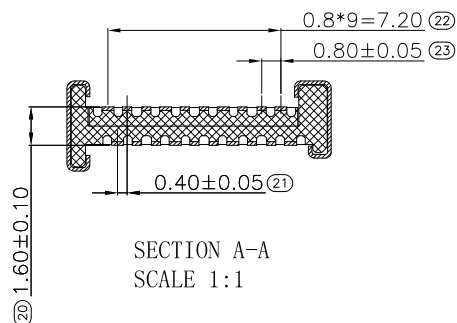

SECTION A-A
SCALE 1:1

SPECIFICATIONS:

- Electrical Performance:
 - Contact current Rating:
 - 3 Amperes for VBUS and GND contacts.
 - 1.25 Amperes for all other contacts.
 - Dielectric Withstanding Voltage: AC 100V(RMS).
 - Insulation resistance: 100M ohms Min.
 - Contact Resistance:
 - 40m ohm Max, 50m ohm Max After Durability.
 - Voltage Rating : 30 Vac (rms).
- Mechanical Performance:
 - Mating Force: 35N Max.
 - Unmating Force: 15N Min.
 - Durability: 50 cycles.
- Environmental Performance:
 - Temperature Range:
 - Operating Temperature: -55°to+85°.
 - Storage Temperature: -20°to+60°.
 - Salt Spray 24h Min.
- Material:
 - Housing: LCP, UL94-V0.
 - Contact: Brass.
 - Shell: Stainless steel.
- Plating specification:
 - Contact: Au(See table) Plated on the functional area of contact; Tin Plated 80u"min on solder area; Nickel 50u"Min underplating over all.
 - Shell: Nickel 30u"Min plating over all.
- "Ⓢ" Shows FAI measurement point.
- "△" Shows modify measurement point.

料号备注

CT 3 M 001 S XX T XX XX

T=PACK-T0097

12=半金锡10"
13=半金锡30"
14=半金锡50"
15=半金锡150"
16=半金锡300"

00=LCP黑色
01=LCP蓝色

R=ROHS2.0标准
W=无卤+ROHS2.0
B=REACH标准

B=盐雾24H
C=盐雾48H

Key-A 20-Pin Plug to One Type-C Port

Pin No.	P1	P2	P3	P4	P5	P6	P7	P8	P9	P10
Signal Nome	VBUS	TX1+	TX1-	GND	RX1+	RX1-	VBUS	CC1	SBU1	SBU2

Signal Nome	CC2	D+	D-	GND	RX2-	RX2+	GND	TX2-	TX2+	VBUS
Pin No.	P20	P19	P18	P17	P16	P15	P14	P13	P12	P11

Key-A 20-Pin Plug to One Standard-A Port

Pin No.	P1	P2	P3	P4	P5	P6	P7	P8	P9	P10
Signal Nome	VBUS	TX1+	TX1-	GND	RX1+	RX1-	VBUS	CC1		

Signal Nome		D+	D-	GND			GND			VBUS
Pin No.	P20	P19	P18	P17	P16	P15	P14	P13	P12	P11



东莞市兴科杰鑫电子有限公司
Dong Guan XingKeJieXin Electronics Co.,Ltd

UNLESS OTHERWISE SPECIFIED
TOLERANCES

X. +/- METRIC 0.50
.X +/- 0.35
.XX +/- 0.25
FRACTIONS +/-
ANGLES +/- 2.00°

DIMENSIONS
(METRIC) (MM)

APPROVAL

制图 Leiny

审核

核准

文件位置

ANGLE OF PROJECTION



日期

2108.04.26

品名

规格

料号

字张

工程图号:

A4

北例

USB 3.1 TYPE C Desktop 2*10PIN
PLUG Key A 焊线式

SEE TABLE

DWG-CTCM-001

状态码 A 页数 1 OF 1

版本.

A0

HSF Compliant

REV.	ECN NO.	DESCRIPTION	DRAW	CHECK	APPD.	DATE
A0	—	NEW DRAWING	Leiny	BEEDEN	BEEDEN	18-04-28

备注:
1. 包装要求整洁, 美观, 工整, 统一
2. 作业过程不可损坏产品, 轻拿轻放

包 装 信 息

每盘产品数	100pcs
每一扎盘数	15盘
每一箱盘数	60 盘
每箱产品数	6000pcs
产品单重	以实际为准
每箱净重	以实际为准
每箱毛重	以实际为准
注: 尾数以实际为准, 填充纸带保护, 另做标识	

耗材		
品名	规格	用量
大透明胶	W=47 mm	若干
小透明胶	W=10 mm	若干
PE 膜	W=62 mm	若干
干燥剂	5g	2 包
标签	/	按图纸

料 号	名 称	规 格	单位	用量
PB001C064	吸塑盘上盖	吸塑盘上盖, PET透明 无卤 195*195*6mm	PCS	1/100
PB001C063	吸塑盘下盒	吸塑盘下盒, PET透明 无卤 195*195*6mm	PCS	1/100
PP011C005	纸 板	20*19CM K=K, 纸板	PCS	8/6000
PP001C047	外 箱	外箱K=K, 外径41*22*23CM	PCS	1/6000



东莞市兴科杰鑫电子有限公司
DongGuan XingKeJieXin Electronics Co.,Ltd

所有物料与操作均
符合ROHS管制标
准

APPROVAL		日期	品名	Conn C TYPE C DESKTOP 2*10PIN PLUG 包装规范	
制图	Elaine	2018.04.28	规格		
审核			料号	SEE TABLE	
核准					
ANGLE OF PROJECTION 			字张	工程图号:	版本.
			A4	PACK-T0097	A0
比例	1 : 1	状态码	C	页数	1 OF 2