

HSF Compliant

REV.	ECN NO.	DESCRIPTION	DRAW	CHECK	APPD.	DATE
X0	—	NEW	Leiny	BENDEE	BENDEE	18-05-10

A

B

C








D

A

B

C

D

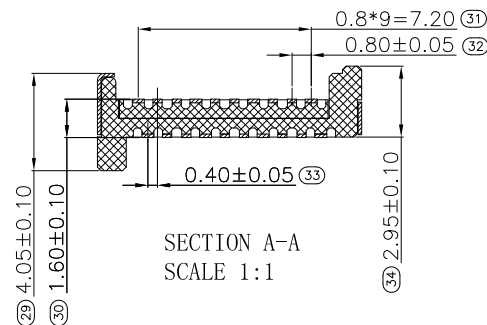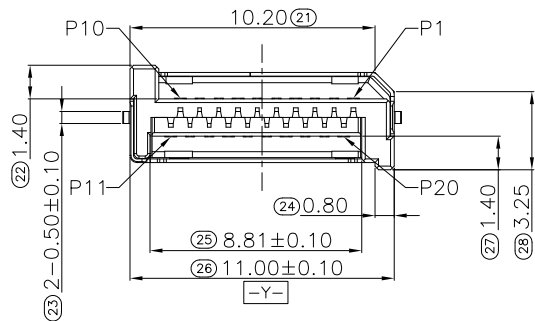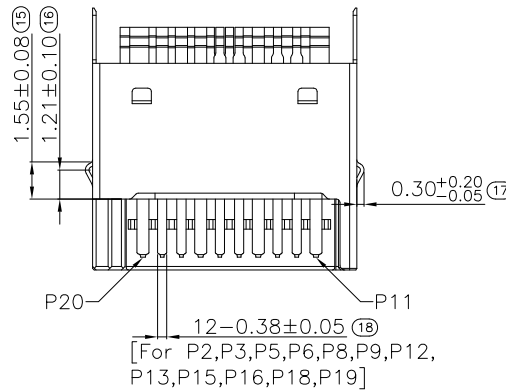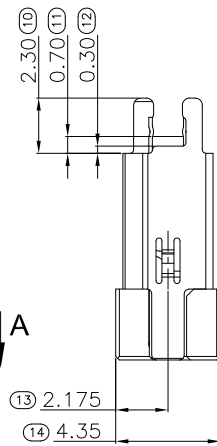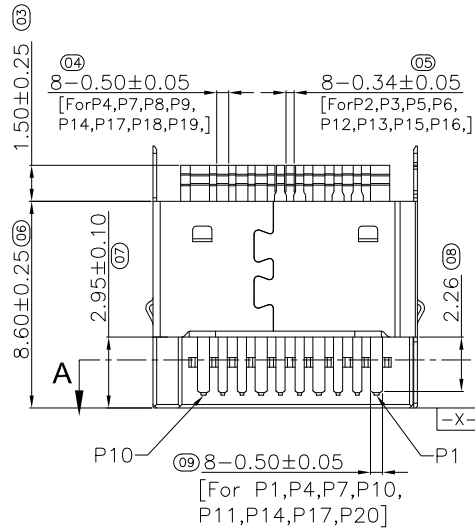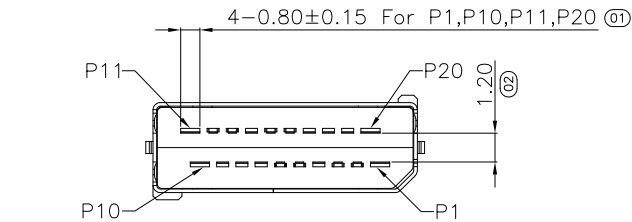

SPECIFICATIONS:

1.Electrical Performance:

1.1 Contact current Rating:

3 Amperes for VBUS and GND contacts.

1.25 Amperes for all other contacts.

1.2 Dielectric Withstanding Voltage:AC 100V(RMS).

1.3 Insulation resistance:100M ohms Min.

1.4 Contact Resistance:

40m ohm Max,50m ohm Max After Durability.

1.5 Voltage Rating : 30 Vac (rms).

2.Mechanical Performance:

2.1 Mating Force:35N Max.

2.2 Unmating Force:15N Min.

2.3 Durability:50 cycles.

3.Environmental Performance:

3.1 Temperature Range:

3.1.1 Operating Temperature:-55'to+85'.

3.1.2 Storage Temperature:-20'to+60'.

3.1.3 Salt Spray 24h Min.

4.Material:

4.1 Housing:LCP Black,UL94-V0.

4.2 Contact:Brass.

4.3 Shell:Stainless steel.

5.Plating specification:

5.1 Contact:~Au(See table) Plated on the functional area of contact;Tin Plated 80u"min on solder area; Nickel 50u"Min underplating over all.

5.2 Shell: Nickel 30u"Min plating over all.

6."⊙" Shows FAI measurement point.

料号备注

CT 3 M 007 B XX T XX XX

T=PACK-T0097

12=半金雾锡1U"
13=半金雾锡3U"
14=半金雾锡5U"
15=半金雾锡15U"
16=半金雾锡30U"

00=LCP黑色

R=ROHS2.0标准
W=无卤+ROHS2.0
B=REACH标准

B=盐雾24H
C=盐雾48H



东莞市兴科杰鑫电子有限公司
Dong Guan XingKeJieXin Electronics Co.,Ltd

Key-B 20-Pin Plug to two Standard-A Ports

Pin No.	P1	P2	P3	P4	P5	P6	P7	P8	P9	P10
Signal Nome	GND	TX1+	TX1-	GND	RX1+	RX1-	GND	D1+	D1-	VBUS
Signal Nome	VBUS	D2-	D2+	GND	RX2+	RX2-	GND	TX2+	TX2-	GND
Pin No.	P20	P19	P18	P17	P16	P15	P14	P13	P12	P11

UNLESS OTHERWISE SPECIFIED TOLERANCES		APPROVAL		日期	品名	USB 3.1 GEN2 TYPE C Desktop 2*10PIN PLUG Key B 夹板式 [脚长1.50mm]	
X.	+/-	制图	Leiny	2018.05.10	规格		
.X	+/-	审核			料号	SEE TABLE	
.XX	+/-	核准			文件位置		
FRACTIONS +/-		ANGLE OF PROJECTION		字张	工程图号:	版本.	
ANGLES +/-	2.00'			A4	DWG-CTCM-007	X0	
DIMENSIONS				比例	1 : 1	状态码	A
(METRIC)	(MM)			页数	1	OF 1	

HSF Compliant

REV.	ECN NO.	DESCRIPTION	DRAW	CHECK	APPD.	DATE
A0	—	NEW DRAWING	Leiny	BEEDEN	BEEDEN	18-04-28

备注:
1. 包装要求整洁, 美观, 工整, 统一
2. 作业过程不可损坏产品, 轻拿轻放

包 装 信 息

每盘产品数	100pcs
每一扎盘数	15盘
每一箱盘数	60 盘
每箱产品数	6000pcs
产品单重	以实际为准
每箱净重	以实际为准
每箱毛重	以实际为准
注: 尾数以实际为准, 填充纸带保护, 另做标识	

耗材		
品名	规格	用量
大透明胶	W=47 mm	若干
小透明胶	W=10 mm	若干
PE 膜	W=62 mm	若干
干燥剂	5g	2 包
标签	/	按图纸

料 号	名 称	规 格	单位	用量
PB001C064	吸塑盘上盖	吸塑盘上盖, PET透明 无卤 195*195*6mm	PCS	1/100
PB001C063	吸塑盘下盒	吸塑盘下盒, PET透明 无卤 195*195*6mm	PCS	1/100
PP011C005	纸 板	20*19CM K=K, 纸板	PCS	8/6000
PP001C047	外 箱	外箱K=K, 外径41*22*23CM	PCS	1/6000



东莞市兴科杰鑫电子有限公司
DongGuan XingKeJieXin Electronics Co.,Ltd

所有物料与操作均
符合ROHS管制标
准

APPROVAL		日期	品名	Conn C TYPE C DESKTOP 2*10PIN PLUG 包装规范		
制图	Elaine	2018.04.28	规格			
审核			料号	SEE TABLE		
核准						
ANGLE OF PROJECTION 			字张	工程图号:		版本.
			A4	PACK-T0097		A0
比例	1 : 1	状态码	C	页数	1	OF 2