

1


2

3


4

5

6

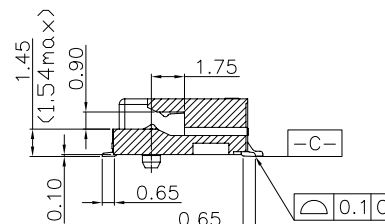A

B

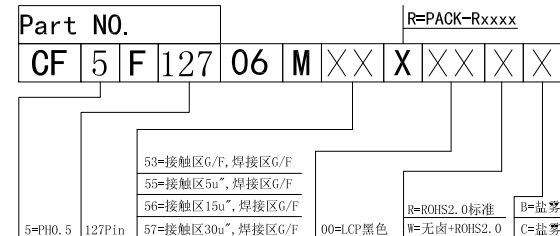

C



东莞市兴科杰鑫电子有限公司
Dong Guan XingKeJieXin Electronics Co.,Ltd

D

1



2


3

4

□



6

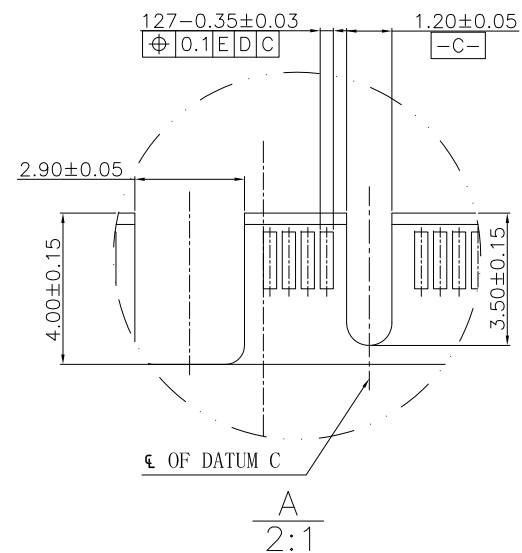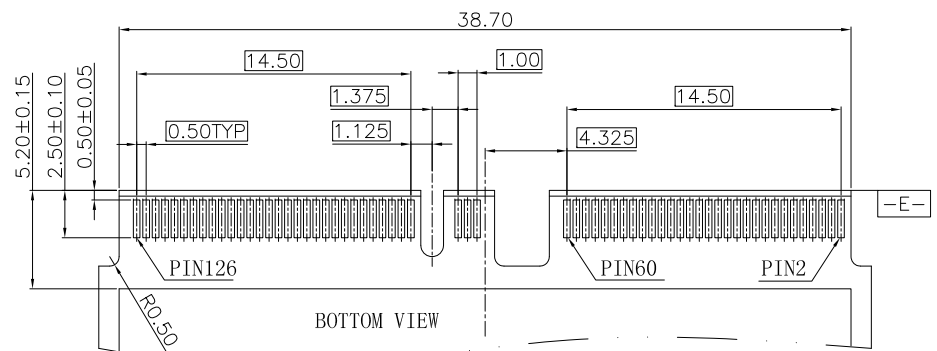





		东莞市兴科杰鑫电子有限公司 Dong Guan XingKeJieXin Electronics Co.,Ltd																			
UNLESS OTHERWISE SPECIFIED TOLERANCES <table border="1"> <tr> <td>METRIC</td> <td></td> </tr> <tr> <td>X. +/-</td> <td>0.30</td> </tr> <tr> <td>.X +/-</td> <td>0.25</td> </tr> <tr> <td>.XX +/-</td> <td>0.20</td> </tr> </table> FRACTIONS +/- ANGLES +/- 2.00° DIMENSIONS <table border="1"> <tr> <td>(METRIC)</td> <td>(MM)</td> </tr> </table>		METRIC		X. +/-	0.30	.X +/-	0.25	.XX +/-	0.20	(METRIC)	(MM)	<table border="1"> <tr> <th>APPROVAL</th> <th>日期</th> </tr> <tr> <td>制图 Yin</td> <td>2023.04.15</td> </tr> <tr> <td>审核 Linson</td> <td>2023.04.15</td> </tr> <tr> <td>核准 Rambo</td> <td>2023.04.15</td> </tr> </table>	APPROVAL	日期	制图 Yin	2023.04.15	审核 Linson	2023.04.15	核准 Rambo	2023.04.15	品名 规格 0.5PH 127Pin M.2 Plus H3.2(KEY A)
		METRIC																			
		X. +/-	0.30																		
		.X +/-	0.25																		
.XX +/-	0.20																				
(METRIC)	(MM)																				
APPROVAL	日期																				
制图 Yin	2023.04.15																				
审核 Linson	2023.04.15																				
核准 Rambo	2023.04.15																				
料号 SEE TABLE		工程图号: DWG-PCI5F-006	版本: A0																		
文件位置		字张 A4	比例 1 : 1																		
ANGLE OF PROJECTION 		状态码 A	页数 2 OF 2																		

HSF Compliant

REV.	ECN NO.	DESCRIPTION	DRAW	CHECK	APPD.	DATE
A0	---	新案发行	YIN	Lison	Rambo	23-05-12

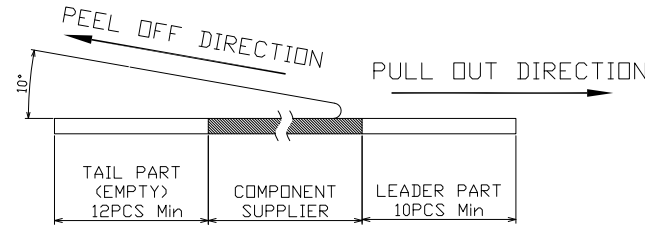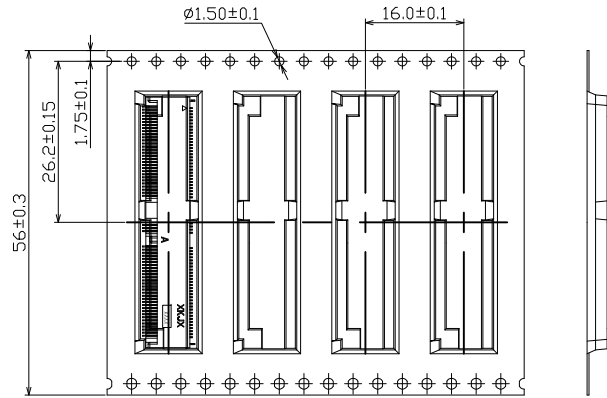

- NOTE:
- MATERIAL:
BOX: FIBREBOARD, CORRUGATED, DOUBLE WALL, (BURSTING STRENGTH: 19Kg/cm², EDGE CRUSH STRENGTH: 44 LB)
TAPE: POLYSTYRENES, TRANSPARENT COLOR.
REEL: POLYSTYRENES, BLUE COLOR.
BAG: POLYETHYLENE,
 - PACKAGING MATERIAL IN PLASTIC, RUBBER, INK, PIGMENT AND PAINT MUST MEET CONTROLLED SUBSTANCES SPEC PER 230-702.
* CADMIUM AND CADMIUM COMPOUNDS NOT TO EXCEED 5 PPM.
* LEAD, CADMIUM, CHROM VI AND MERCURY NOT TO EXCEED 100 PPM (COMBINED).
 - EACH BAG SHALL BE INCLUDED DESICCANT.
 - CARRIER TAPES, COVER TAPES, REELS AND TAPED COMPONENTS MUST MEET THE REQUIREMENTS DEFINED PER EIA-481-C.
 - PEELING STRENGTH: 0.1 ~ 1.3 N (10 ~ 130 GRAMS)
 - PEELING SPEED: 300 mm/min.

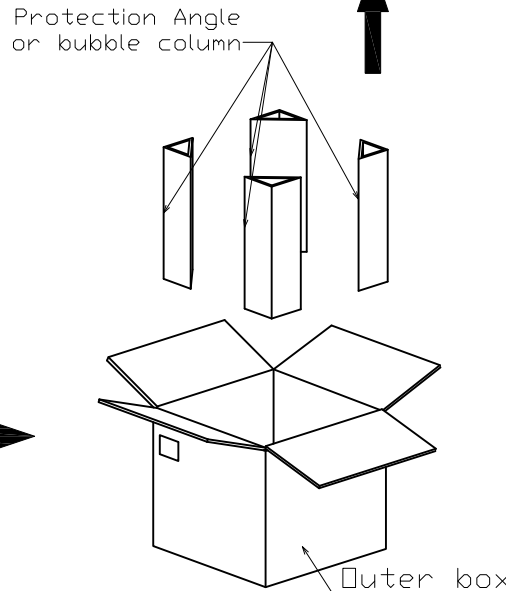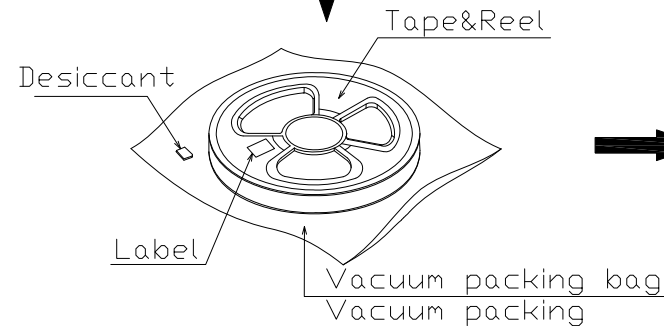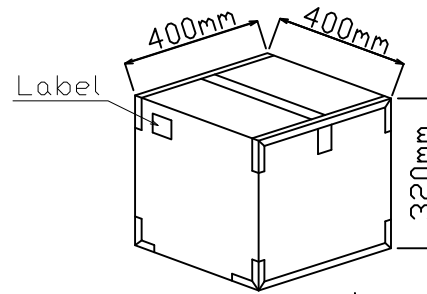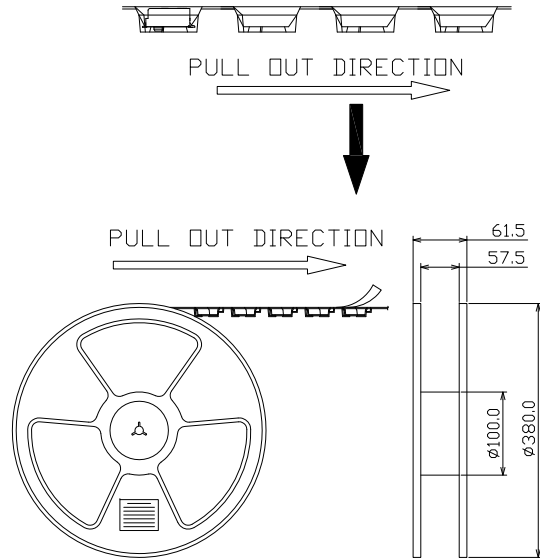

载带	PET透明, W=56mm, PH=16mm, T=0.35mm	SET	1/1400
上封带	自粘式透明, T=0.05mm, W=49.5mm	M	22.9/1400
真空袋	60*50CM, T=0.08mm	PCS	1/1400
三角板	10CM*10CM*13CM H30CM	PCS	4/7000
外箱	K=K, 外径40*40*32CM	PCS	1/7000
品名	规格	单位	用量



东莞市兴科杰鑫电子有限公司
Dong Guan XingKeJieXin Electronics Co.,Ltd

所有物料与操作均符合ROHS管制标准	APPROVAL		日期	品名规格	0.5PH 127Pin M.2 Plus H3.2(KEY A) -包规						
	制图	Yin	2023.05.12								
	审核	Linson	2023.05.12		料号						
	核准	Rambo	2023.05.12								
	文件位置										
DIMENSIONS		ANGLE OF PROJECTION		字张	工程图号：		版本.				
(METRIC)	(MM)			A4	PACK-R0297		A0				
				比例	1 : 1	状态码	C	页数	1	OF	1