

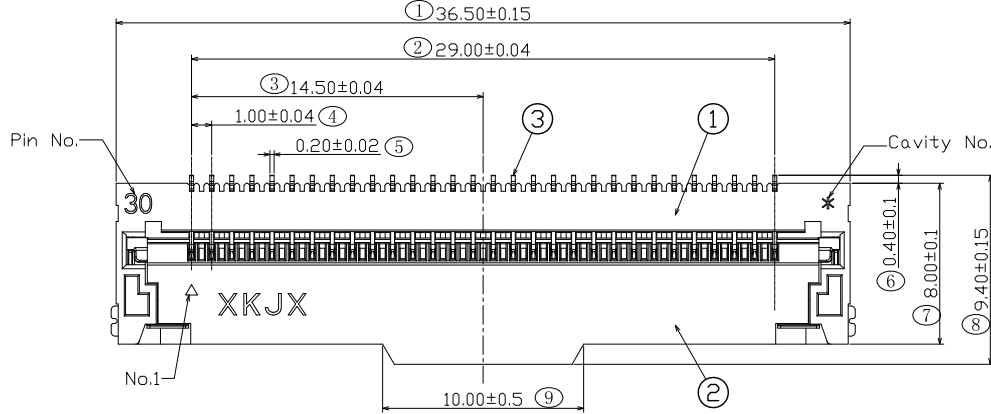


HSF Compliant




REV.	ECN NO.	DESCRIPTION	DRAW	CHECK	APPD.	DATE
A0	—	新版发行	YIN	—	BENDEE	21-06-23




NOTES:
SPECIFICATION:
CURRENT RATING: 0.5A 50V AC/DC
CONTACT RESISTANCE: 30mΩ Max
INSULATION RESISTANCE: 100MΩ MIN AT 500V DC
OPERATING TEMPERATURE RANGE: -40°C TO +85°C
WITHSTANDING VOLTAGE: 500V AC/MINUTE

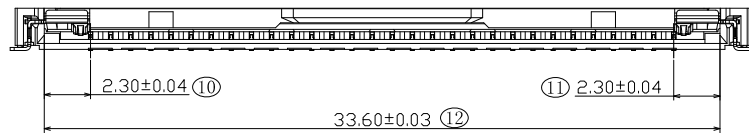

料号备注										R=PACK-R0165			
CF	1	F	XX	01	M	XX	R	XX	XX	XX	XX	XX	XX

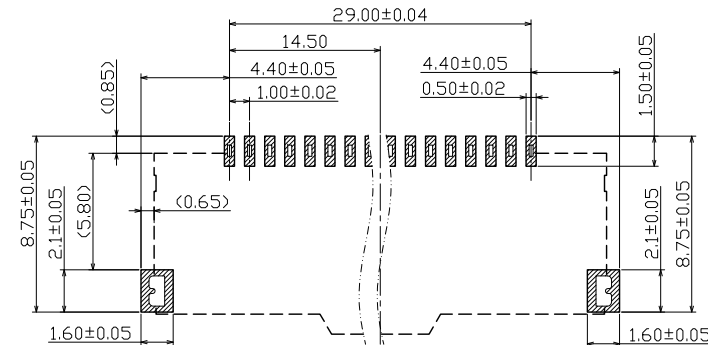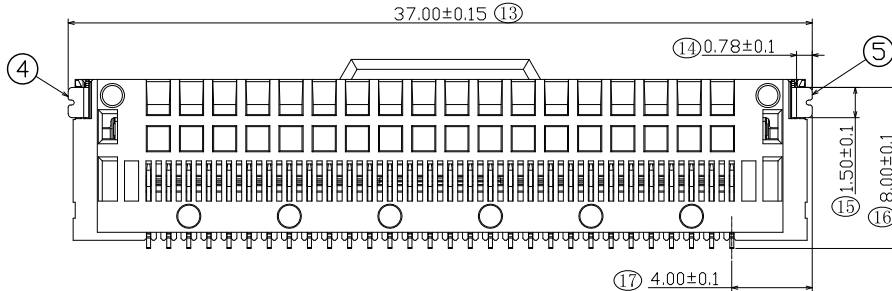

P.C.B. LAYOUT

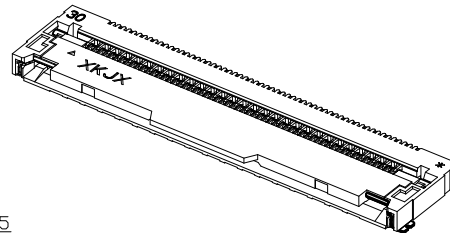

5	RIGHT GROUND LUG	1	COPPER ALLOY	Sn:80u"~160u"; Ni:50u"~100u".
4	GROUND LUG LEFT	1	COPPER ALLOY	Sn:80u"~160u"; Ni:50u"~100u".
3	TERMINAL	30	COPPER ALLOY	Au:1u"MIN; Sn:80u"~160u"; Ni:50u"~100u".
2	COVER	1	THERMOPLASTIC	UL 94-Vo COLOR:BLACK
1	HOUSING	1	THERMOPLASTIC	UL 94-Vo COLOR:WHITE
ITEN	COMPONENT	Q'TY	MATERIAL	FINISH






东莞市兴科杰鑫电子有限公司
Dong Guan XingKeJieXin Electronics Co.,Ltd




UNLESS OTHERWISE SPECIFIED TOLERANCES		APPROVAL	日期	品名规格	FPC 1.0mm Pitch 30P H2.1 SMT前掀式	
X. +/-	0.20	制图 YIN	2021.06.23	规格		
.X +/-	0.15	审核		料号	SEE TABLE	
.XX +/-	0.10	核准		文件位置		
.XXX +/-	0.05			字张	工程图号:	版本.
FRACTIONS +/-	2.00'			A4	DWG-FPC1F-001	A0
ANGLES +/-				比例	1 : 1	状态码 A
DIMENSIONS				页数	1	OF 2
(METRIC)	(MM)					

HSF Compliant

REV.	ECN NO.	DESCRIPTION	DRAW	CHECK	APPD.	DATE
A0	—	新版发行	YIN	—	BENDEE	21-06-23

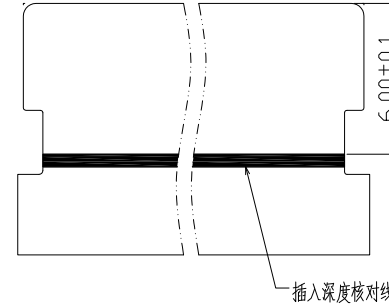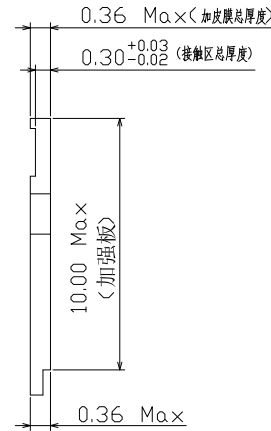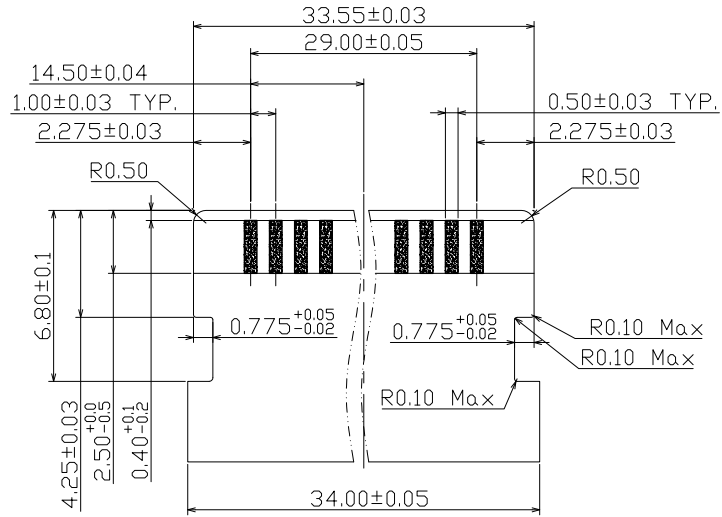

APPLICABLE FPC RECOMMENDED DIMENSION
蓝白裸线（不接地）

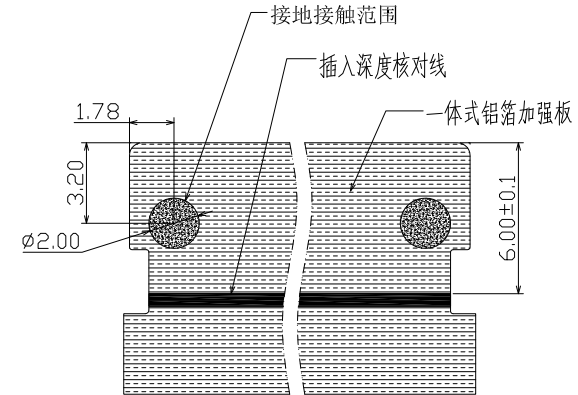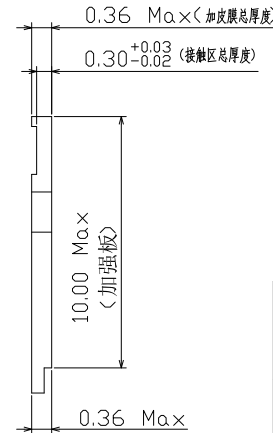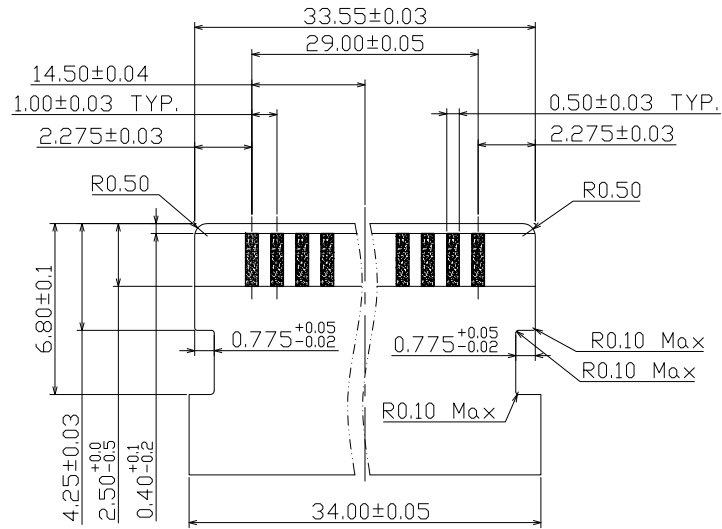

APPLICABLE FPC RECOMMENDED DIMENSION
一体式铝箔加强板排线（接地）



东莞市兴科杰鑫电子有限公司
Dong Guan XingKeJieXin Electronics Co.,Ltd

UNLESS OTHERWISE SPECIFIED TOLERANCES		APPROVAL		日期	品名	规格	
X.	+/-	制图	YIN	2021.06.23	规格	FPC 1.0mm Pitch 30P H2.1 SMT前掀式	
.X	+/-	审核					
.XX	+/-	核准					
.XXX	+/-	文件位置			料号	SEE TABLE	
FRACTIONS	+/-	ANGLE OF PROJECTION		字张	工程图号:	版本.	
ANGLES	+/-	2.00'		A4	DWG-FPC1F-001	A0	
DIMENSIONS				比例	1 : 1	状态码	A
(METRIC)	(MM)			页数	2	OF 2	

HSF Compliant

REV.	ECN NO.	DESCRIPTION	DRAW	CHECK	APPD.	DATE
A0	—	NEW	YIN	BENDEE	BENDEE	21-06-23

A

B

C

D

A

B

C

D

NOTE:

1. MATERIAL:

BOX: FIBREBOARD, CORRUGATED, DOUBLE WALL, (BURSTING STRENGTH:

19Kgf/cm², EDGE CRUSH STRENGTH: 44 LB)

TAPE: POLYSTYRENES, TRANSPARENT COLOR.

REEL: POLYSTYRENES, BLUE COLOR.

BAG: POLYETHYLENE,

2. PACKAGING MATERIAL IN PLASTIC, RUBBER, INK, PIGMENT AND PAINT MUST

MEET CONTROLLED SUBSTANCES SPEC PER 230-702.

* CADMIUM AND CADMIUM COMPOUNDS NOT TO EXCEED 5 PPM.

* LEAD, CADMIUM, CHROM VI AND MERCURY NOT TO EXCEED 100 PPM (COMBINED).








3. EACH BAG SHALL BE INCLUDED DESICCANT.

4. CARRIER TAPES, COVER TAPES, REELS AND TAPED COMPONENTS MUST MEET THE

REQUIREMENTS DEFINED PER EIA-481-C.

5. PEELING STRENGTH: 0.1 ~ 1.3 N (10 ~ 130 GRAMS)

6. PEELING SPEED: 300 mm/min.

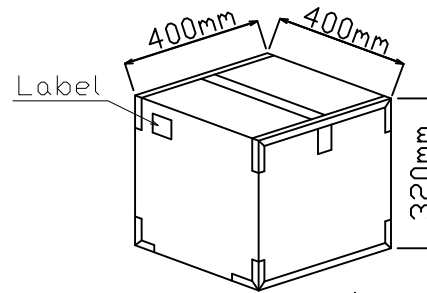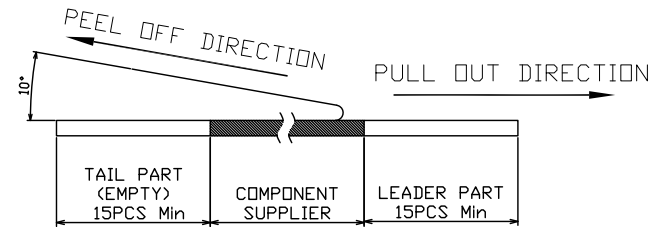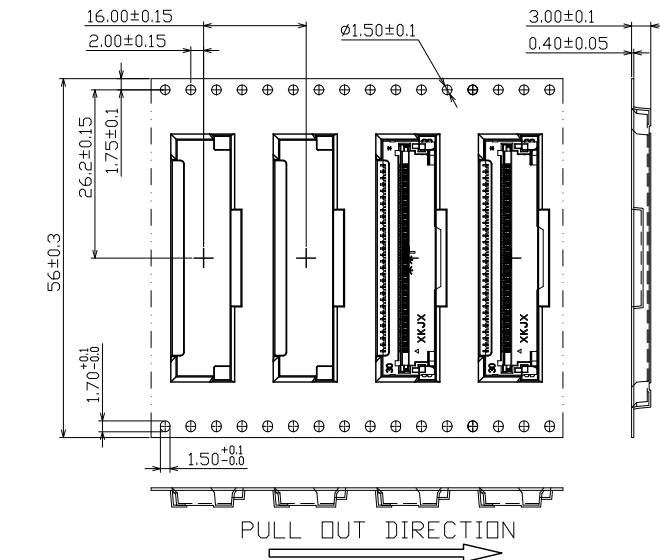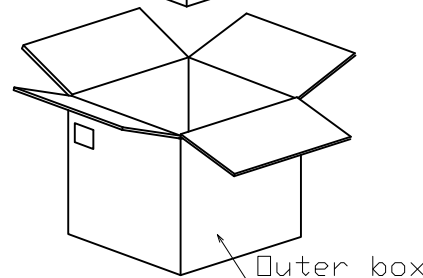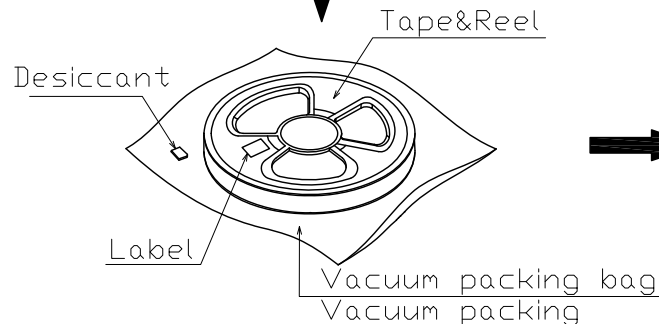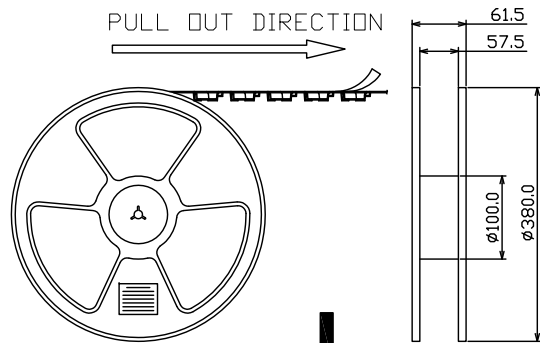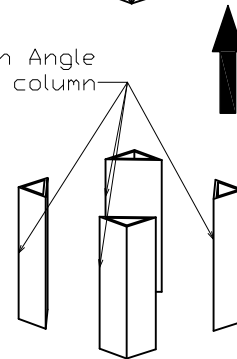Protection Angle
or bubble column

品名	规格	单位	用量
载带	Φ380, 载带W=56mm PH=16mm T=0.4mm PET透明	SET	1/1500
上封带	自粘式透明, T=0.05mm, W=49.5mm	M	24.5/1500
干燥剂	-	PCS	1/1500
真空袋	PE, 0.08MM*47CM*55CM	PCS	1/1500
三角板	A=B, 10CM*10CM*13CM H28CM	PCS	4/7500
外箱	K=K, 外径40*40*32CM	PCS	1/7500

东莞市兴科杰鑫电子有限公司
Dong Guan XingKeJieXin Electronics Co.,Ltd

所有物料与操作均符合ROHS管制标准

APPROVAL

日期

制图 YIN

2021.06.23

审核

核准

文件位置

品名

规格

料号

字张

工程图号:


比例

FPC 1.0mm Pitch 30P H2.1 SMT前掀式
-包规

PACK-R0165

版本: A0

页数 1 OF 1

DIMENSIONS
(METRIC) (MM)

1

2

3

4

5

6