
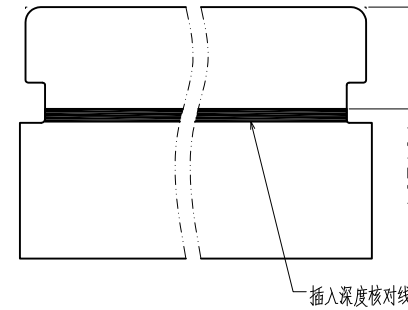
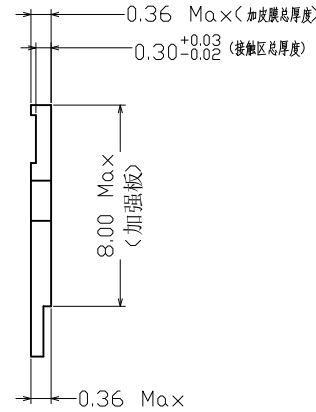


HSF Compliant

REV.	ECN NO.	DESCRIPTION	DRAW	CHECK	APPD.	DATE
A0	—	新版发行	YIN	—	BENDEE	21-07-09

No.of contacts	DIM B	DIM E	DIM F
30	14.5	19.05	19.50
41	20.0	24.55	25.00
51	25.0	29.55	30.00

A

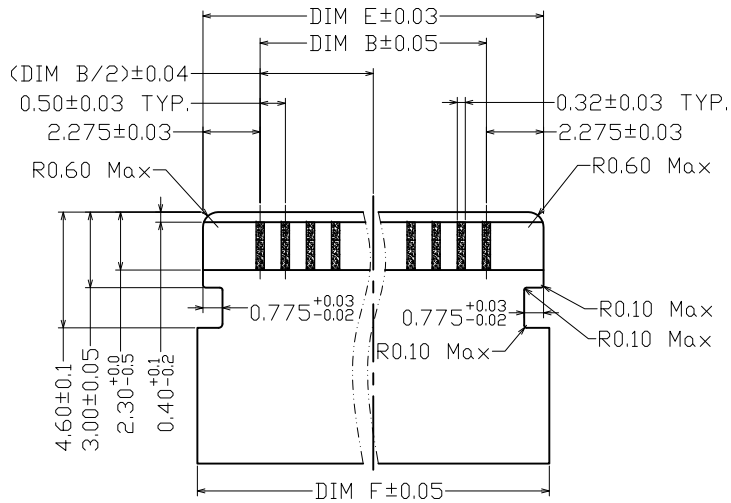




A

B

B

APPLICABLE FPC RECOMMENDED DIMENSION
蓝白裸线（不接地）

C

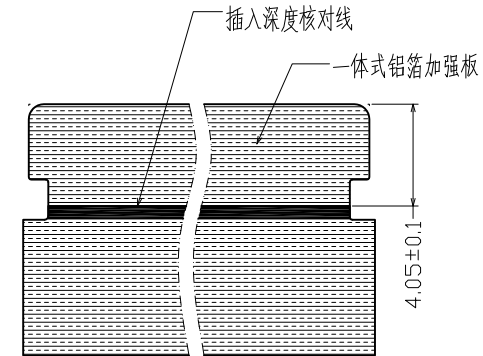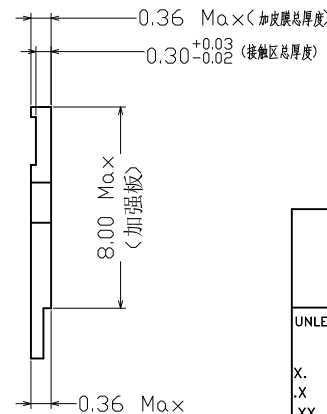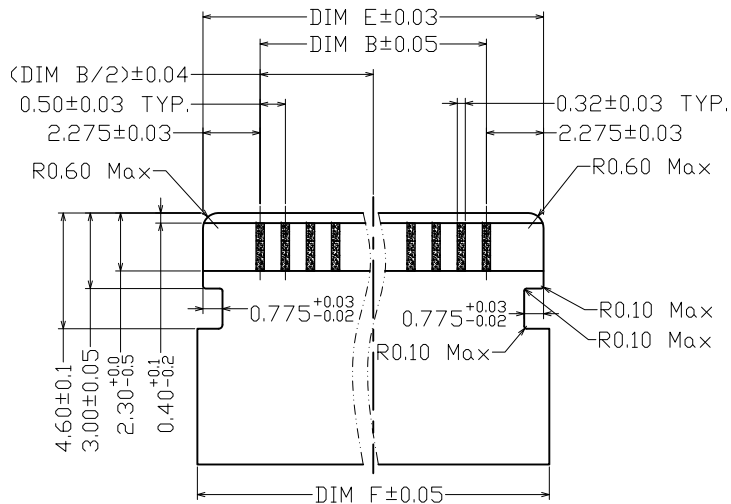

C

D

APPLICABLE FPC RECOMMENDED DIMENSION
一体式铝箔加强板排线（接地）

UNLESS OTHERWISE SPECIFIED TOLERANCES		APPROVAL		日期	品名	FPC 0.5mm Pitch H2.1 W6.0 SMT前掀式 CONN
		制图	YIN	2021.07.09	规格	
X. +/-	METRIC 0.20	审核				
.X +/-	0.15	核准				
.XX +/-	0.10				料号	SEE TABLE
.XXX +/-	0.05				文件位置	
FRACTIONS +/-	2.00'				字张	工程图号: DWG-FPC5F-005
ANGLES +/-					A4	版本: A0
DIMENSIONS		ANGLE OF PROJECTION			比例	1 : 1
(METRIC)	(MM)				状态码	A
					页数	2 OF 2

D

HSF Compliant

REV.	ECN NO.	DESCRIPTION	DRAW	CHECK	APPD.	DATE
A0	—	NEW	YIN	BENDEE	BENDEE	21-07-09

NOTE:

1. MATERIAL:

BOX: FIBREBOARD, CORRUGATED, DOUBLE WALL, (BURSTING STRENGTH:

19Kgf/cm², EDGE CRUSH STRENGTH: 44 LB)

TAPE: POLYSTYRENES, TRANSPARENT COLOR.

REEL: POLYSTYRENES, BLUE COLOR.

BAG: POLYETHYLENE,

2. PACKAGING MATERIAL IN PLASTIC, RUBBER, INK, PIGMENT AND PAINT MUST

MEET CONTROLLED SUBSTANCES SPEC PER 230-702.

* CADMIUM AND CADMIUM COMPOUNDS NOT TO EXCEED 5 PPM.

* LEAD, CADMIUM, CHROM VI AND MERCURY NOT TO EXCEED 100 PPM (COMBINED).



3. EACH BAG SHALL BE INCLUDED DESICCANT.

4. CARRIER TAPES, COVER TAPES, REELS AND TAPED COMPONENTS MUST MEET THE



REQUIREMENTS DEFINED PER EIA-481-C.

5. PEELING STRENGTH: 0.1 ~ 1.3 N (10 ~ 130 GRAMS)

6. PEELING SPEED: 300 mm/min.

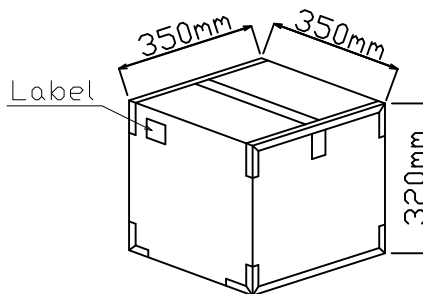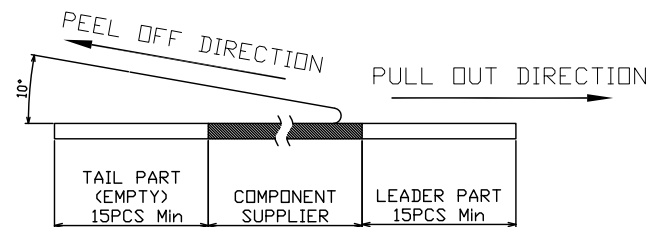

Protection Angle
or bubble column

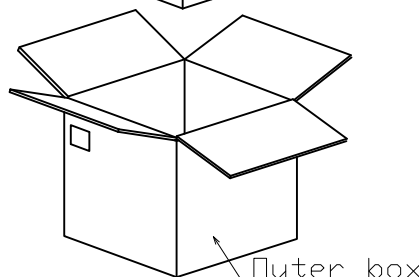

NO.OF CONTACTS	PCS/REEL	PCS/BOX	DIM W	DIM F
30	2000	12000	44	14.2
41	2000	12000	44	14.2
51	2000	10000	56	26.2



东莞市兴科杰鑫电子有限公司
Dong Guan XingKeJieXin Electronics Co.,Ltd

所有物料与操作均符合ROHS管制标准

APPROVAL

日期

品名

规格

FPC 0.5mm Pitch H2.1 W6.0 SMT前掀式
CONN-包规

制图

YIN

审核

核准

文件位置

料号

字张

工程图号:

PACK-R0175


版本:

A0

DIMENSIONS

(METRIC)

(MM)



比例

1 : 1

状态码

C

页数

1 OF 1