



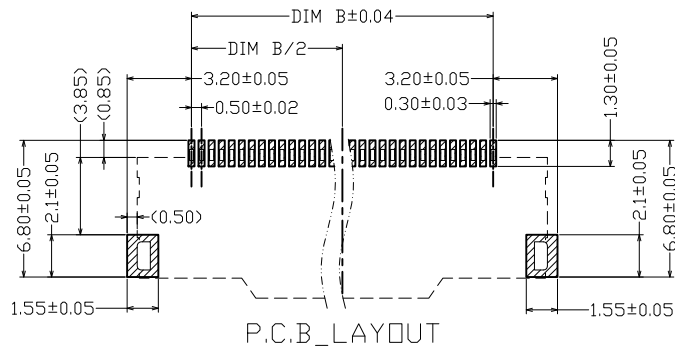
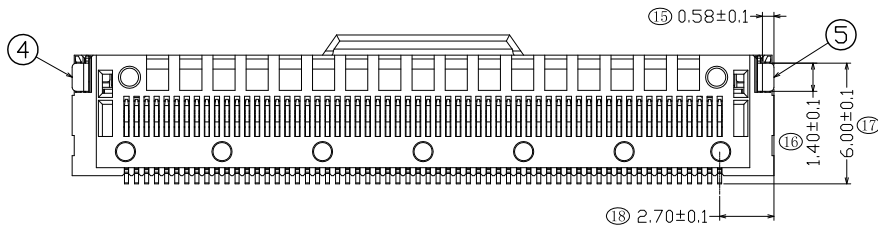
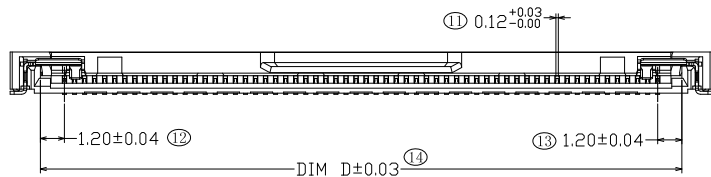


HSF Compliant

REV.	ECN NO.	DESCRIPTION	DRAW	CHECK	APPD.	DATE
A1	ECN211117001	增加PIN位规格	YIN	—	BENDEE	21-11-17
A2	-	增加24PIN位规格	YIN	—	BENDEE	21-12-15

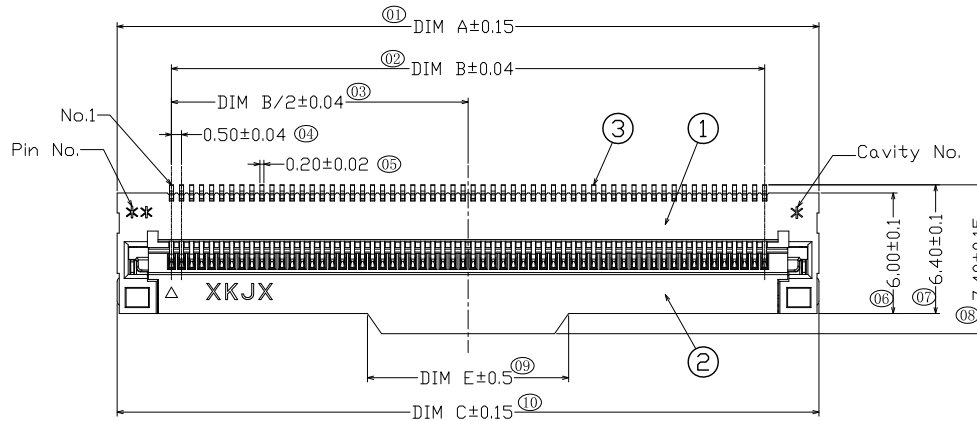

NOTES:
SPECIFICATION:
CURRENT RATING: 0.5A 50V AC/DC
CONTACT RESISTANCE: 30mΩ Max
INSULATION RESISTANCE: 100MΩ MIN AT 500V DC
OPERATING TEMPERATURE RANGE: -40°C TO +85°C
WITHSTANDING VOLTAGE: 500V AC/MINUTE

料号备注

R=PACK-R0174

CF 5 F XX 04 M XX R XX XX

A2 24=24Pin
50=50Pin
A1 51=51Pin
60=60Pin
68=68Pin
80=80Pin

12=半金穿锡1U"

00=主体LCP本色
掀盖LCP黑色

R=ROHS2.0标准
W=无卤+ROHS2.0
H=REACH标准

B=盐雾24H

No. of contacts	DIM A	DIM B	DIM C	DIM D	DIM E
24	16.9	11.5	16.9	13.9	4.0
50	29.9	24.5	29.9	26.9	10.0
51	30.4	25.0	30.4	27.4	
60	34.9	29.5	34.9	31.9	
68	38.9	33.5	38.9	35.9	
80	44.9	39.5	44.9	41.9	

5	RIGHT GROUND LUG	1	COPPER ALLOY	Sn:80u"~160u"; Ni:50u"~100u";
4	GROUND LUG LEFT	1	COPPER ALLOY	Sn:80u"~160u"; Ni:50u"~100u";
3	TERMINAL	*	COPPER ALLOY	Au:1u"MIN; Sn:80u"~160u"; Ni:50u"~100u";
2	COVER	1	THERMOPLASTIC	UL 94-Vo COLOR:BLACK
1	HOUSING	1	THERMOPLASTIC	UL 94-Vo COLOR:WHITE
ITEM	COMPONENT	Q'TY	MATERIAL	FINISH






东莞市兴科杰鑫电子有限公司
Dong Guan XingKeJieXin Electronics Co.,Ltd

UNLESS OTHERWISE SPECIFIED TOLERANCES X. +/- 0.20 .X +/- 0.15 .XX +/- 0.10 .XXX +/- 0.05 FRACTIONS +/- 2.00' ANGLES +/- DIMENSIONS (METRIC) (MM)	APPROVAL	日期	品名	FPC 0.5mm Pitch H2.1 W6.0 SMT前掀式 CONN(短款)	
	制图 YIN	2021.12.15	规格		
	审核		料号	SEE TABLE	
	核准		文件位置		
ANGLE OF PROJECTION		字张		工程图号:	版本.
		A4		DWG-FPC5F-004	A2
		比例	1 : 1	状态码	A
		页数	1	OF 2	




HSF Compliant

REV.	ECN NO.	DESCRIPTION	DRAW	CHECK	APPD.	DATE
A1	ECN211117001	增加PIN位规格	YIN	—	BENDEE	21-11-17
A2	-	增加24PIN位规格	YIN	—	BENDEE	21-12-15

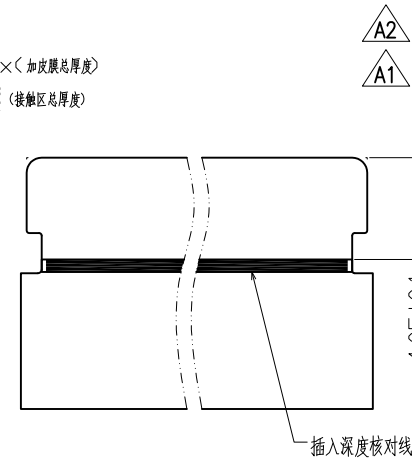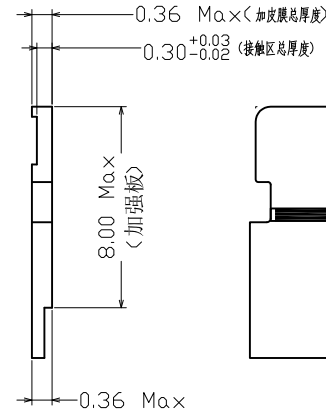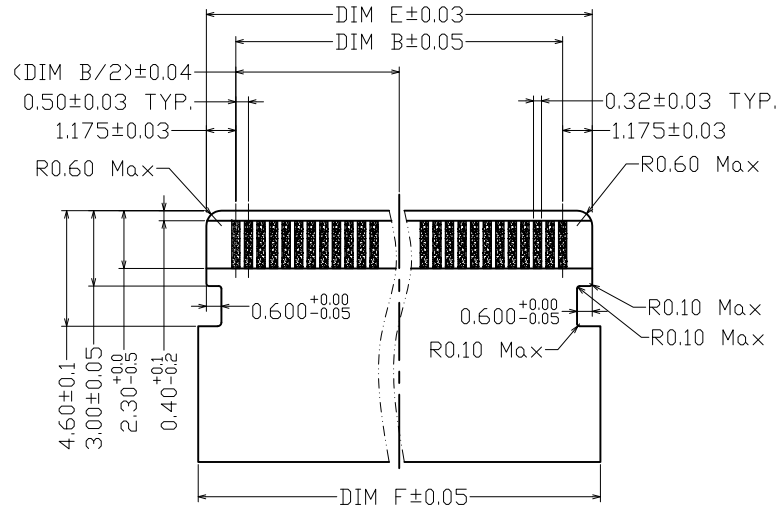


No.of contacts	DIM B	DIM E	DIM F
24	11.5	13.85	14.5
50	24.5	26.85	27.5
51	25.0	27.35	28.0
60	29.5	31.85	32.5
68	33.5	35.85	36.5
80	39.5	41.85	42.5




APPLICABLE FPC RECOMMENDED DIMENSION
蓝白裸线（不接地）

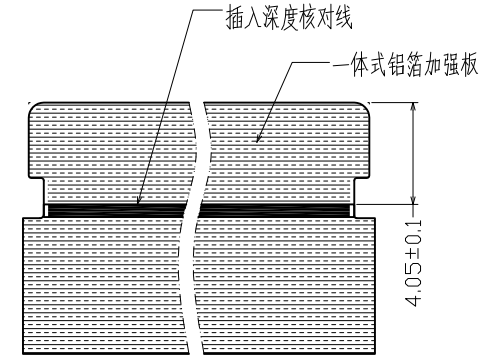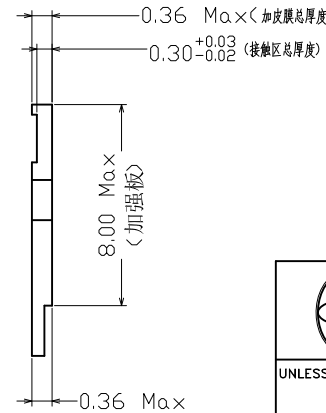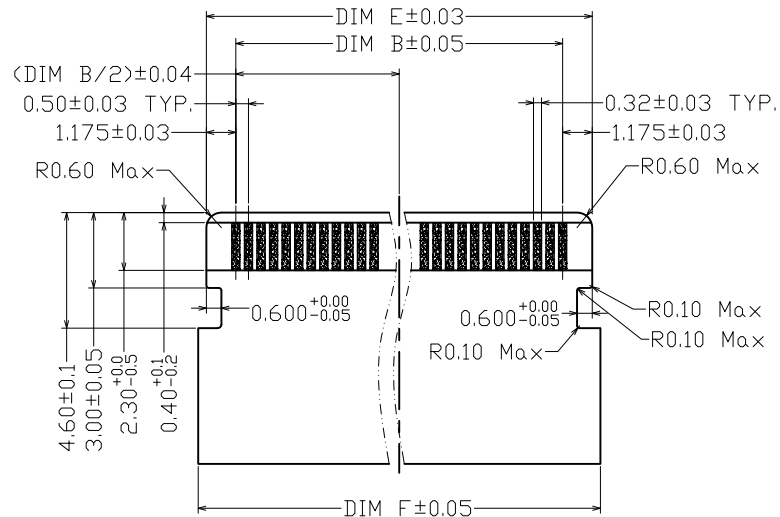




APPLICABLE FPC RECOMMENDED DIMENSION
一体式铝箔加强板排线（接地）

		东莞市兴科杰鑫电子有限公司				
		Dong Guan XingKeJieXin Electronics Co.,Ltd				
UNLESS OTHERWISE SPECIFIED TOLERANCES		APPROVAL		日期	品名 规格	FPC 0.5mm Pitch H2.1 W6.0 SMT前掀式 CONN(短款)
		制图 YIN		2021.12.15		
		审核				
		核准				
X. +/- 0.20					料号	SEE TABLE
.X +/- 0.15						
.XX +/- 0.10						
.XXX +/- 0.05						
FRACTIONS +/-		文件位置				
ANGLES +/- 2.00'						
DIMENSIONS		ANGLE OF PROJECTION		字张	工程图号:	版本:
(METRIC)				A4	DWG-FPC5F-004	A2
(MM)				比例	1 : 1	状态码
					A	页数
					2	OF 2

HSF Compliant

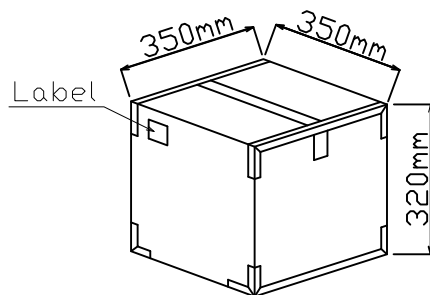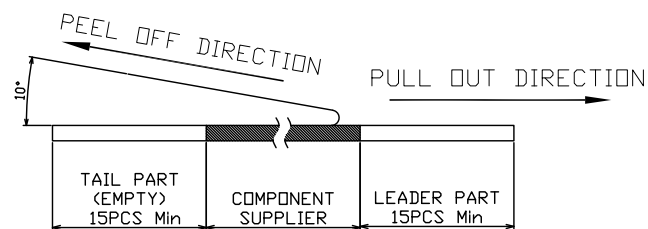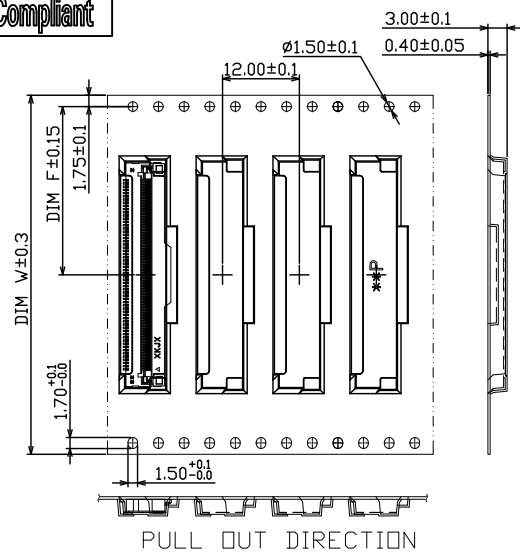

Protection Angle
or bubble column

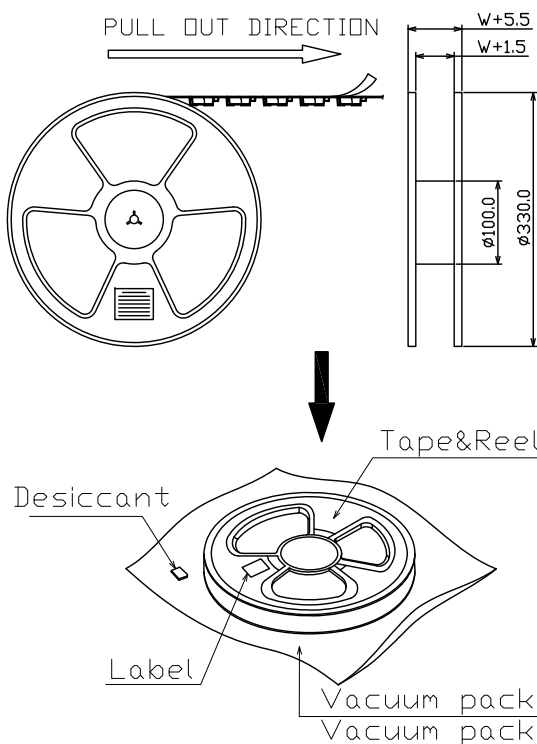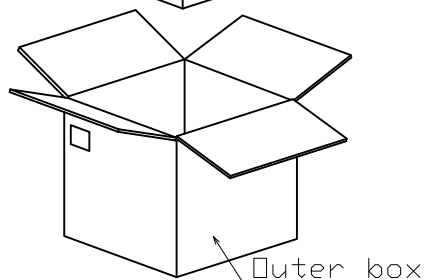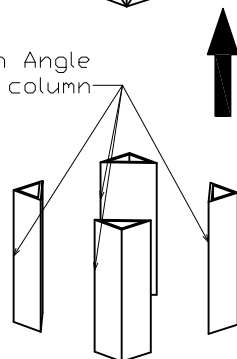

REV.	ECN NO.	DESCRIPTION	DRAW	CHECK	APPD.	DATE
A1	ECN211117001	增加规格	YIN	BENDEE	BENDEE	21-11-17
A2	-	增加规格	YIN	BENDEE	BENDEE	21-12-18

NOTE:

1. MATERIAL:

BOX: FIBREBOARD, CORRUGATED, DOUBLE WALL, (BURSTING STRENGTH:

19Kgf/cm², EDGE CRUSH STRENGTH: 44 LB)

TAPE: POLYSTYRENES, TRANSPARENT COLOR.

REEL: POLYSTYRENES, BLUE COLOR.

BAG: POLYETHYLENE,

2. PACKAGING MATERIAL IN PLASTIC, RUBBER, INK, PIGMENT AND PAINT MUST

MEET CONTROLLED SUBSTANCES SPEC PER 230-702.

* CADMIUM AND CADMIUM COMPOUNDS NOT TO EXCEED 5 PPM.

* LEAD, CADMIUM, CHROM VI AND MERCURY NOT TO EXCEED 100 PPM (COMBINED).

3. EACH BAG SHALL BE INCLUDED DESICCANT.

4. CARRIER TAPES, COVER TAPES, REELS AND TAPED COMPONENTS MUST MEET THE

REQUIREMENTS DEFINED PER EIA-481-C.

5. PEELING STRENGTH: 0.1 ~ 1.3 N (10 ~ 130 GRAMS)

6. PEELING SPEED: 300 mm/min.

NO. OF CONTACTS	PCS/REEL	PCS/BOX	DIM W	DIM F
24	2000	12000	44	20.2
50	2000	10000	56	26.2
51	2000	10000	56	26.2
60	2000	10000	56	26.2
68	2000	10000	56	26.2
80	2000	8000	72	34.2



东莞市兴科杰鑫电子有限公司
Dong Guan XingKeJieXin Electronics Co.,Ltd

所有物料与操作均符合ROHS管制标准

APPROVAL

日期

品名

规格

FPC 0.5mm Pitch H2.1 W6.0 SMT前掀式
CONN-包规(短款)

制图

YIN

2021.12.18

审核

核准

文件位置

料号

ANGLE OF PROJECTION

字张

工程图号: PACK-R0174

版本

A2

DIMENSIONS

(METRIC)

(MM)

比例

1 : 1

状态码

C

页数

1 OF 1