


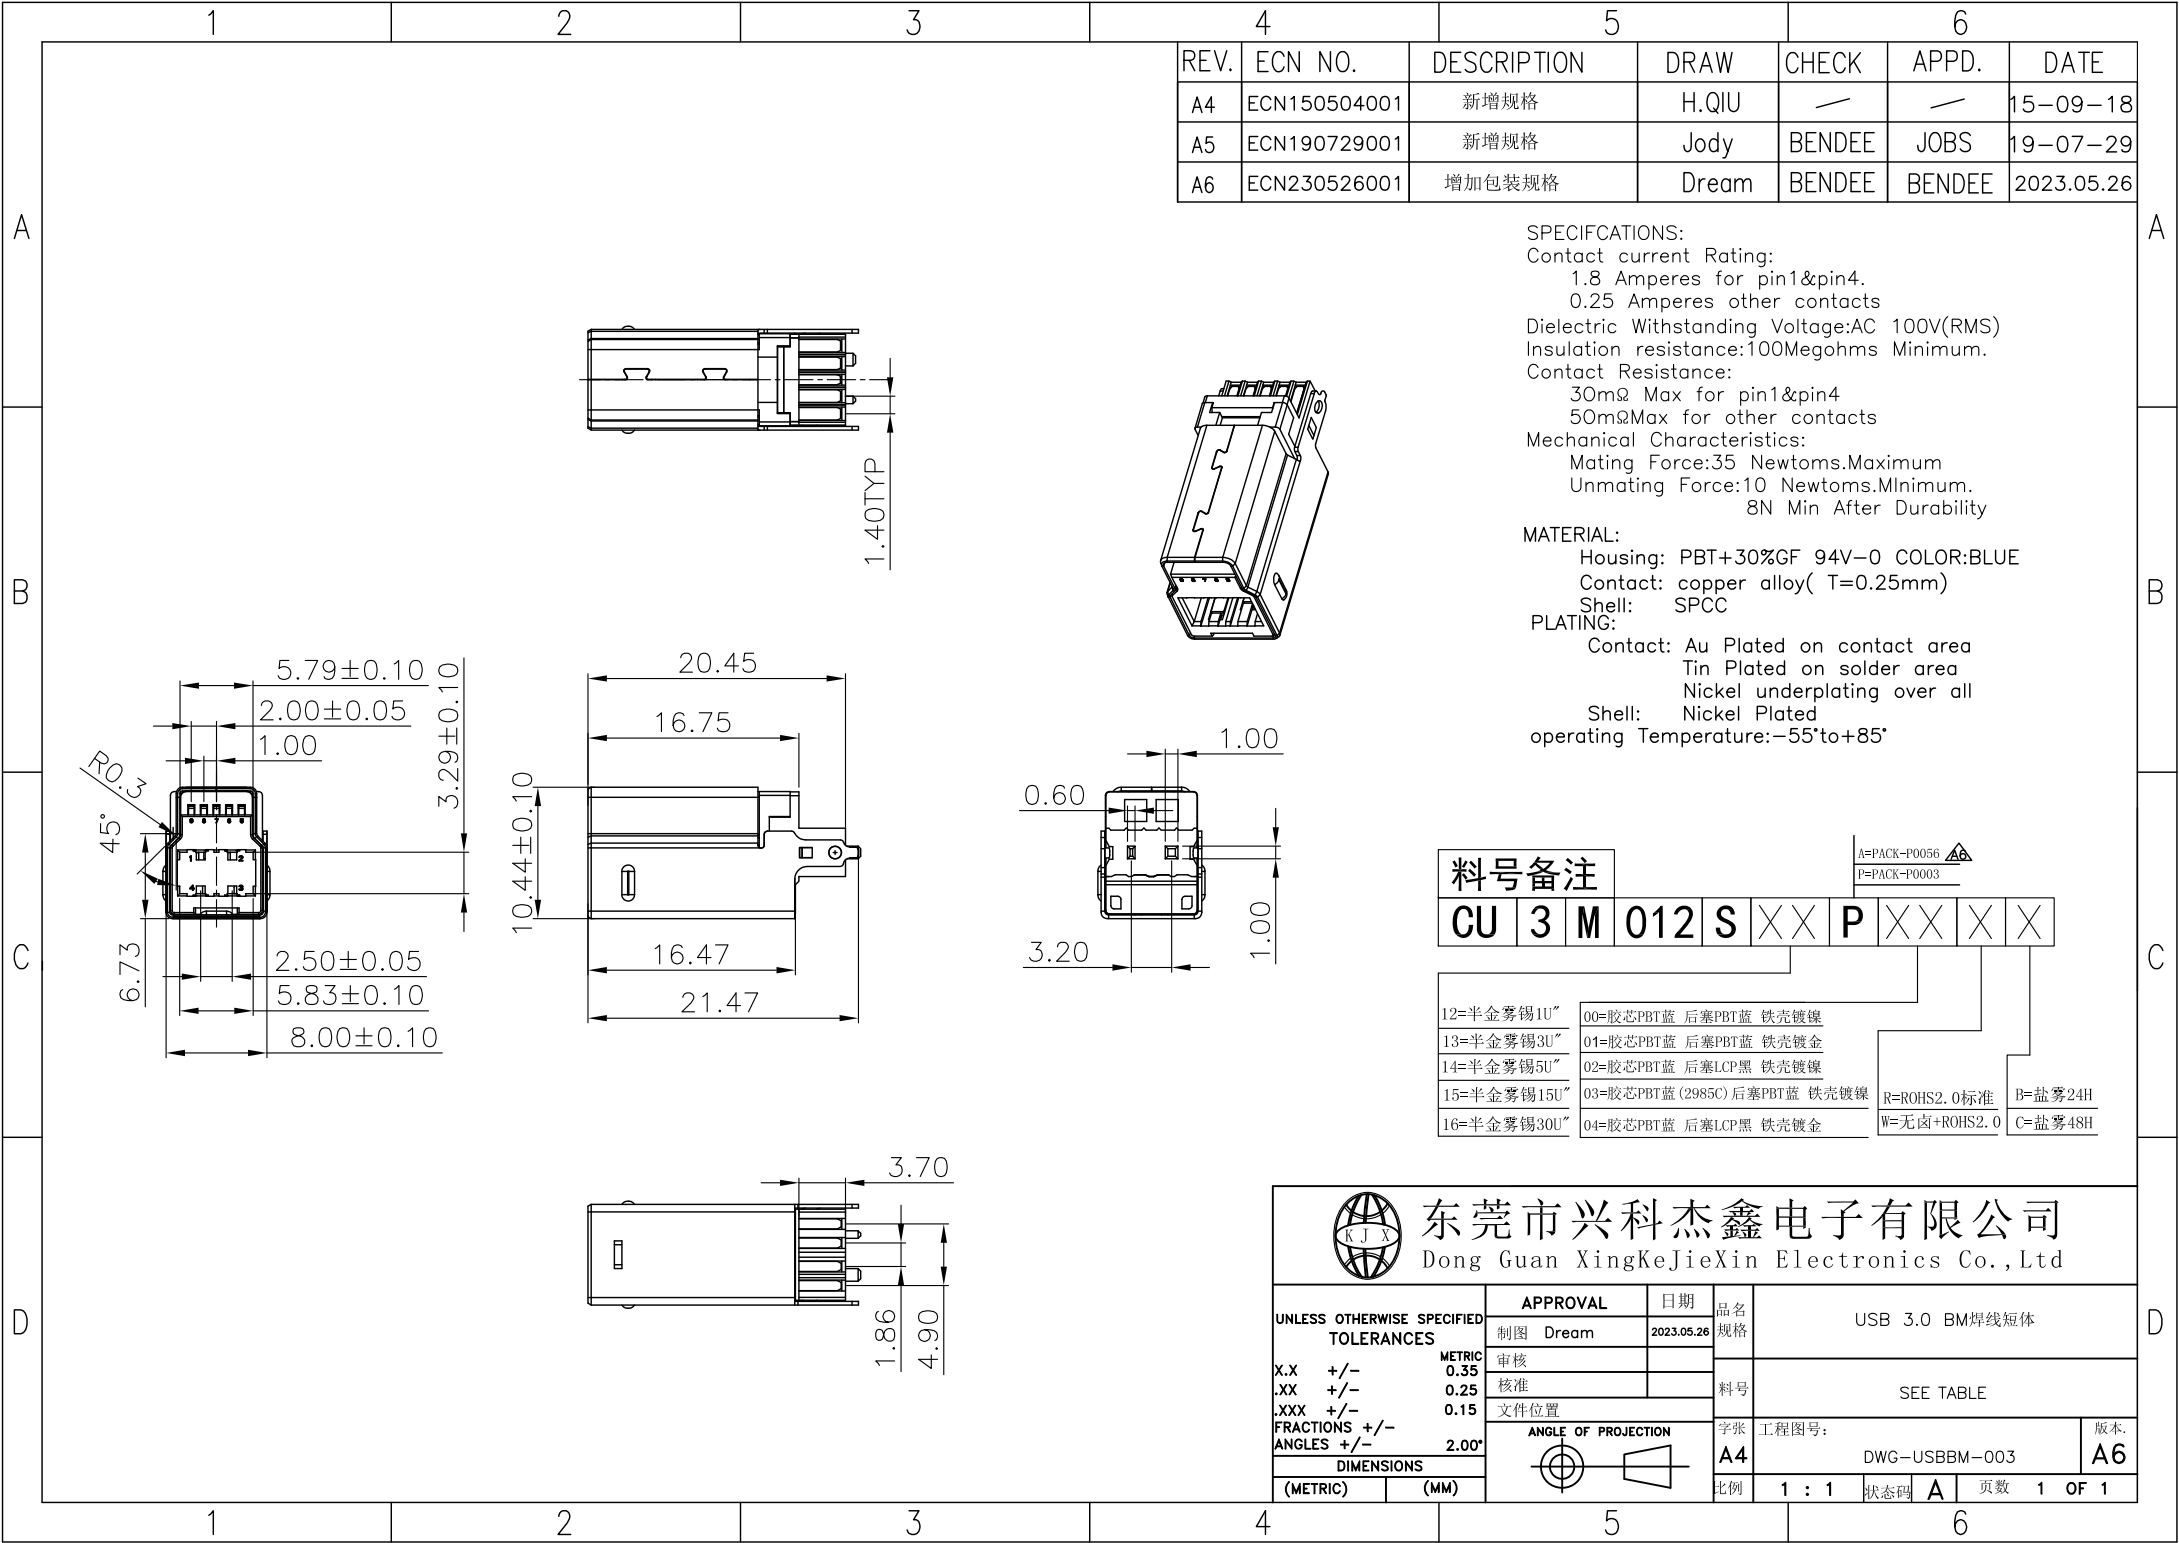

REV.	ECN NO.	DESCRIPTION	DRAW	CHECK	APPD.	DATE
A4	ECN150504001	新增规格	H.QIU	—	—	15-09-18
A5	ECN190729001	新增规格	Jody	BENDEE	JOBS	19-07-29
A6	ECN230526001	增加包装规格	Dream	BENDEE	BENDEE	2023.05.26

SPECIFICATIONS:
Contact current Rating:
1.8 Amperes for pin1&pin4.
0.25 Amperes other contacts
Dielectric Withstanding Voltage:AC 100V(RMS)
Insulation resistance:100Megohms Minimum.
Contact Resistance:
30mΩ Max for pin1&pin4
50mΩMax for other contacts
Mechanical Characteristics:
Mating Force:35 Newtons.Maximum
Unmating Force:10 Newtons.Minimum.
8N Min After Durability

MATERIAL:
Housing: PBT+30%GF 94V-0 COLOR:BLUE
Contact: copper alloy(T=0.25mm)
Shell: SPCC
PLATING:
Contact: Au Plated on contact area
Tin Plated on solder area
Nickel underplating over all
Shell: Nickel Plated
operating Temperature:-55°to+85°

料号备注									
CU	3	M	012	S	XX	P	XX	XX	XX

12=半金雾锡1U"	00=胶芯PBT蓝 后塞PBT蓝 铁壳镀镍	R=ROHS2.0标准	B=盐雾24H
13=半金雾锡3U"	01=胶芯PBT蓝 后塞PBT蓝 铁壳镀金		
14=半金雾锡5U"	02=胶芯PBT蓝 后塞LCP黑 铁壳镀镍		
15=半金雾锡15U"	03=胶芯PBT蓝 (2985C) 后塞PBT蓝 铁壳镀镍		
16=半金雾锡30U"	04=胶芯PBT蓝 后塞LCP黑 铁壳镀金	W=无卤+ROHS2.0	C=盐雾48H



东莞市兴科杰鑫电子有限公司
Dong Guan XingKeJieXin Electronics Co., Ltd

UNLESS OTHERWISE SPECIFIED TOLERANCES		APPROVAL	日期	品名	规格	
X.X +/-		制图	Dream	料号	SEE TABLE	
.XX +/-		审核				
.XXX +/-		核准				
FRACTIONS +/-		文件位置		字张	工程图号:	版本.
ANGLES +/-		2.00"		A4	DWG-USBBM-003	A6
DIMENSIONS		ANGLE OF PROJECTION				
(METRIC)	(MM)			北例	1 : 1	状态码 A
				页数	1	OF 1