
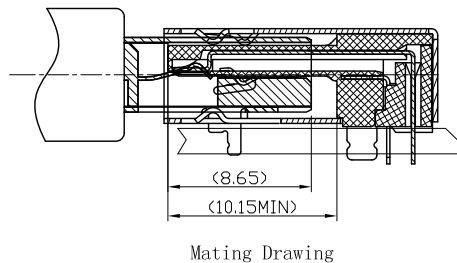


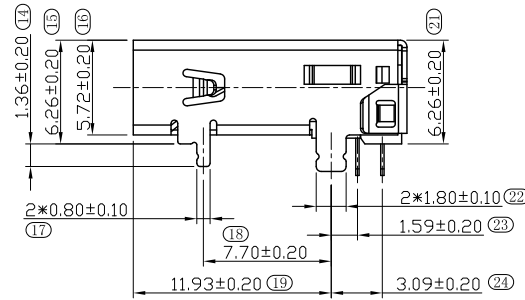
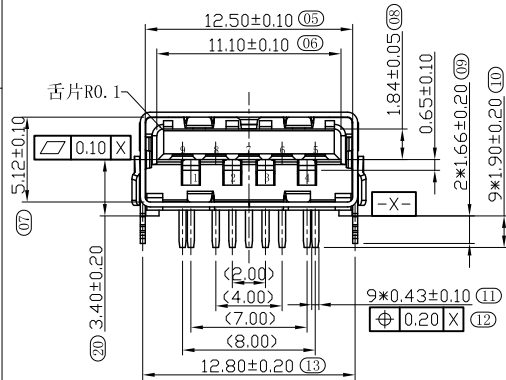
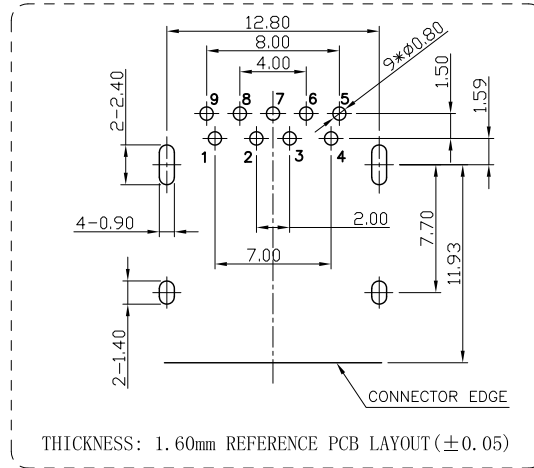


HSF Compliant

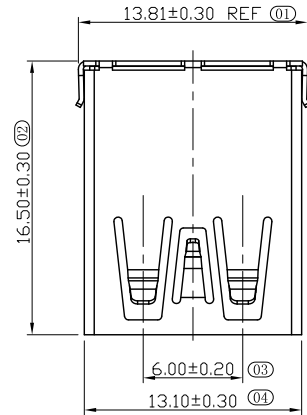

REV.	ECN NO.	DESCRIPTION	DRAW	CHECK	APPD.	DATE
A4	ECN200331001	增加包规	Jody	BENDEE	BENDEE	20-03-31
A5	ECN200703001	增加产品规格	Jody	BENDEE	BENDEE	20-07-03

SPECIFICATIONS:

- 1.0 Electrical Performance:
 - 1.1 Contact current Rating:
 - 1.80 Amperes for VBUS and GND contacts
 - 0.25 Amperes for all other contacts
 - 1.2 Dielectric Withstanding Voltage: AC 100V/minute
 - 1.3 Insulation resistance: 100M ohms Min
 - 1.4 Contact Resistance:
 - 30m ohm Max for VBUS and GND contacts
 - 50m ohm Max for all other contacts
 - 1.5 Voltage Rating : 30 Vac (rms)
- 2.0 Mechanical Performance:
 - 2.1 Mating Force: 35N Max
 - 2.2 Unmating Force: 10N~25N;
 - 2.3 Durability: 5000 cycles
- 3.0 Environmental Performance:
 - 3.1 Temperature Range:
 - 3.1.1 Operating Temperatures: -20°C TO +85°C.
 - 3.1.2 Storage Temperatures: -45°C TO +60°C.
 - 3.1.3 Resistance to REFLOW SOLDERING
HEAT: 260°+0/-5°, 10s.
 - 3.2 Salt Spray 24h for contact gold&shell Nickel
- 4.0 MATERIAL:
 - 4.1 Housing: PA9T, See table UL94 V-0
 - 4.2 Contact: 2.0 Contacts C5191 & 3.0 Contacts C2680
 - 4.3 Shell: SUS
- 5.0 PLATING:
 - 5.1 Contact: Au Plated on contact area
Tin 100u" Plated on solder area (Matte Sn)
Nickel 80u" Min Plated underplating over all.
 - 5.2 Shell: Nickel 50u" Min underplating over all.
- 6.0 ** Shows FAI inspection items.

料号备注										D=PACK-R0122				AA	
CU	3	F	308	D	X	X	X	X	X						
42=半金零锡10" 43=半金零锡30" 44=半金零锡50" 45=半金零锡150" 46=半金零锡300"														00=PA9T重不锈钢壳镀镍 01=PA9T重不锈钢壳镀镍 02=PA9T (RED 186C) 不锈钢壳镀镍 03=PA9T重不锈钢壳镀镍 不喷码	
										R=ROHS2.0标准 H=无卤+ROHS2.0 E=REACH标准				D=盐雾24H C=盐雾48H	



东莞市兴科杰鑫电子有限公司

Dong Guan XingKeJieXin Electronics Co., Ltd

UNLESS OTHERWISE SPECIFIED TOLERANCES		APPROVAL		日期	品名	USB 3.1 Gen2 AF 90度DIP CH3.4 [直脚]	
X.	+/-	制图	Jody	20.07.03	规格		
.X	+/-	审核					
.XX	+/-	核准					
FRACTIONS	+/-	文件位置			料号	SEE TABLE	
ANGLES	+/-	ANGLE OF PROJECTION			字张	工程图号:	版本.
DIMENSIONS					A4	DWG-USBAF-368	A5
(METRIC)	(MM)				比例	1 : 1	状态码 A
						页数	3 OF 3



A

B

C

D



A

B



C

D

REV.	ECN NO.	DESCRIPTION	DRAW	CHECK	APPD.	DATE
A0	-----	NEW	Jody	BENDEE	BENDEE	20-07-03

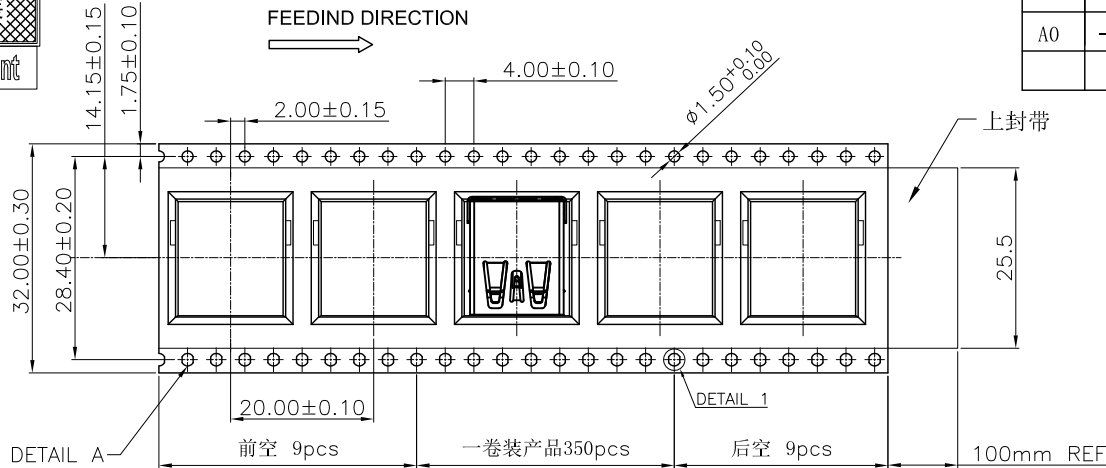

包 装 信 息	
每盘产品数	350pcs
每箱卷盘数	10卷
每箱产品数	3500pcs
产品单重	2.13g
每箱净重	7.45Kg
每箱毛重	以实际为准

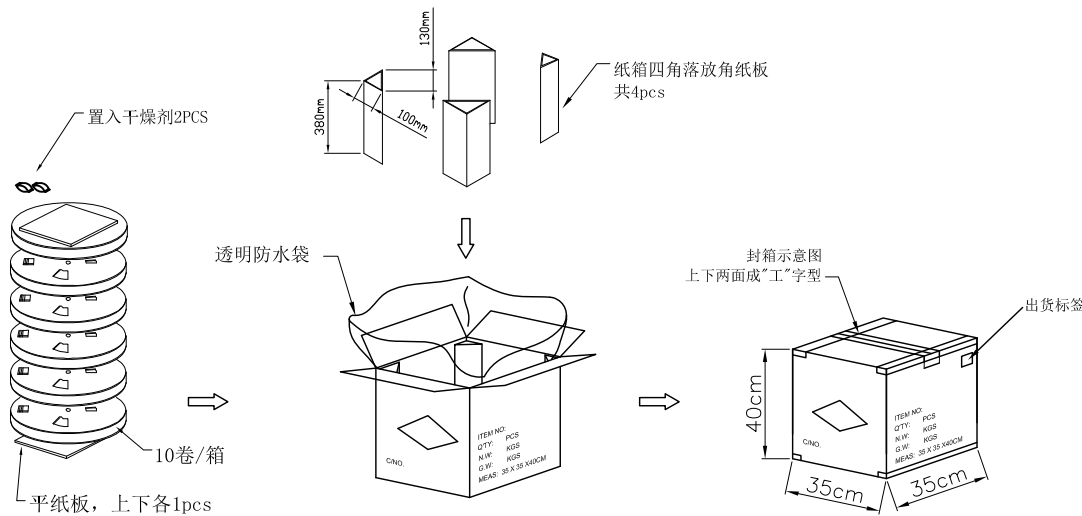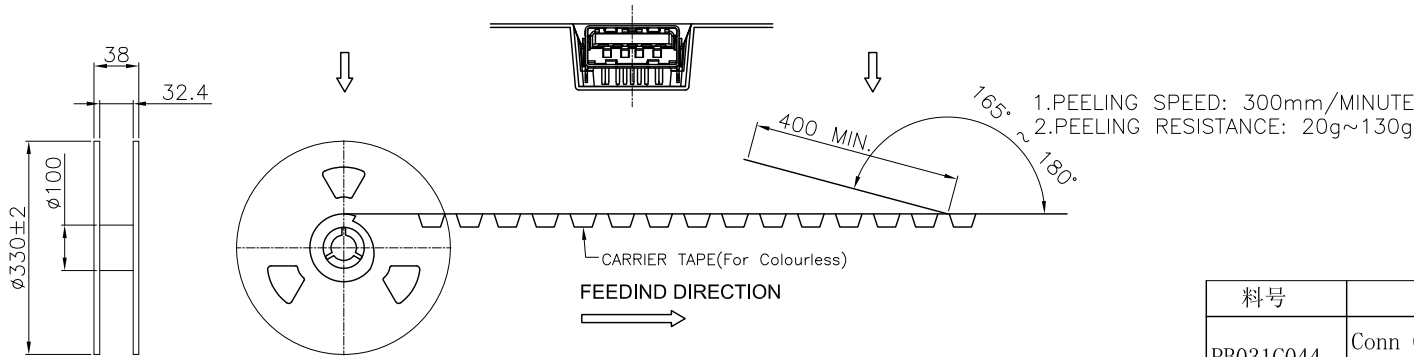

料号	品名	规格	单位	用量
PB031C044	Conn C AF 90度 DIP CH3. 4载带	Φ330, 载带W=32mm PH=20mm PS黑色 T=0.5mm	SET	1/350
PB031C016	上封带	自粘式透明, T=0.05mm, W=25.5mm	M	7.6/350
PE031C005	防水袋	80*80CM, T=0.05mm	PCS	1/3500
PP011C012	三角板	10cm*10cm*13cm, H38cm	PCS	4/3500
PP011C009	纸板	33*33CM A=B, 纸板	PCS	2/3500
PP001C055	外箱	外箱K=K, 外径35*35*40CM	PCS	1/3500



东莞市兴科杰鑫电子有限公司
DongGuan XingKeJieXin Electronics Co., Ltd

所有物料与操作均符合ROHS管制标准	APPROVAL	日期	品名	Conn C Gen2 AF 90度DIP CH3. 4 [直脚]		
	制图 Jody	20.07.03	规格			
	审核		料号			
	核准		文件位置			
ANGLE OF PROJECTION			字张	工程图号: PACK-R0122		版本: A0
			比例	1 : 1	状态码 C	页数 1 OF 1