

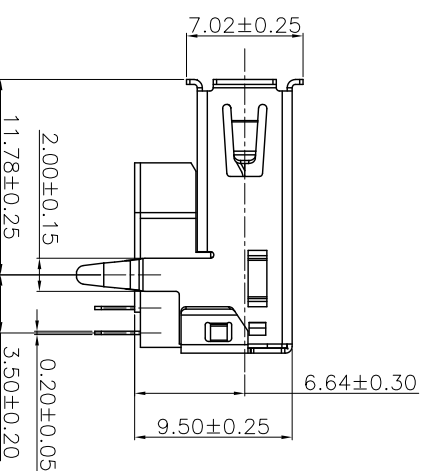
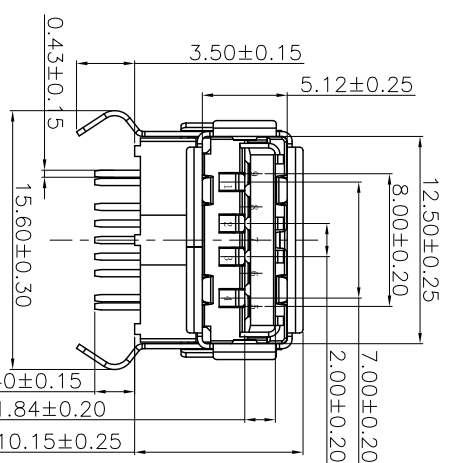




REV.	ECN NO.	DESCRIPTION	DRAW	CHECK	APPD.	DATE
X0	——	新发行	BENDEE	BENDEE	BENDEE	18-08-08

SPECIFICATIONS:

- 1.0 Electrical Performance:
- 1.1 Contact current Rating:
 - 1.80 Amperes for VBUS and GND contacts
 - 0.25 Amperes for all other contacts
- 1.2 Dielectric Withstanding Voltage:AC 100V/minute
- 1.3 Insulation resistance:100M ohms Min
- 1.4 Contact Resistance:
 - 30m ohm Max for VBUS and GND contacts
 - 50m ohm Max for all other contacts
- 1.5 Voltage Rating : 30 Vac (rms)
- 2.0 Mechanical Performance:
- 2.1 Mating Force:35N Max
- 2.2 Unmating Force:10N~25N;
- 2.3 Durability:1500 cycles
- 3.0 Environmental Performance:
- 3.1 Temperature Range:
 - 3.1.1 Operating Temperatures:-20°C TO +85°C.
 - 3.1.2 Storage Temperatures: -45°C TO +60°C.
- 3.2 Solt Spray 24h for contact gold&shell Nicke
- 4.0 MATERIAL:
 - 4.1 Housing:PA9T,Blue300C See table UL94 V-0
 - 4.2 Contact:2.0 Contacts C5191&3.0 Contacts C2650
- 4.3 Shell:SSUS
- 5.0 PLATING:
- 5.1 Contact: Au Plated on contact area
- 5.2 Shell:Nickel 30u"Min underplating over all.
- Tin 100u"Plated on solder area (Motte Sn)
- Nickel 50u"Min Plated underplating over all.

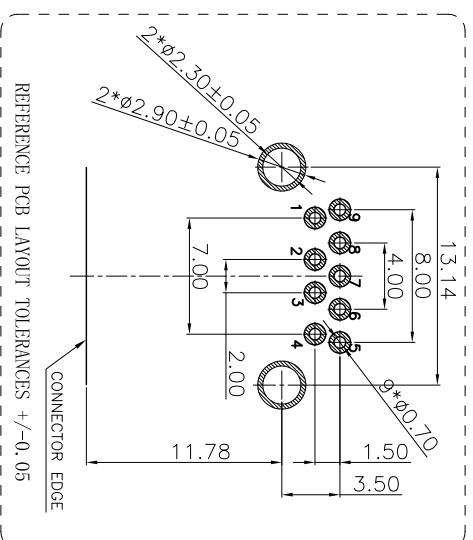

料号备注							
CU	3	F	3	1	3	D	X
						X	T
						X	X
						X	X
						X	X



A

7.00±0.15

2.00±0.15

8.00±0.15

11.0min

 										东 莞 市 兴 科 杰 鑫 电 子 有 限 公 司									
Dong Guan XingKeJieXin Electronics Co., Ltd																			
UNLESS OTHERWISE SPECIFIED																			
TOLERANCES																			
METRIC																			
X. +/-																			
X +/-																			
.XX +/-																			
FRACTIONS +/-																			
ANGLES +/-																			
2.00°																			
DIMENSIONS																			
(METRIC) (MM)																			
 																			
APPROVAL																			
制图 BENDEE																			
2018.06.08																			
日期																			
品名																			
规格																			
料号																			
字张																			
工程图号:																			
DWG-USBAF-373																			
版本.																			
XO																			
SEE TABLE																			
[弯脚]																			
USB 3.0 AF 90度DIP H9.5																			
1 : 1																			
块代码																			
A																			
页数																			
1																			
OF 1																			