
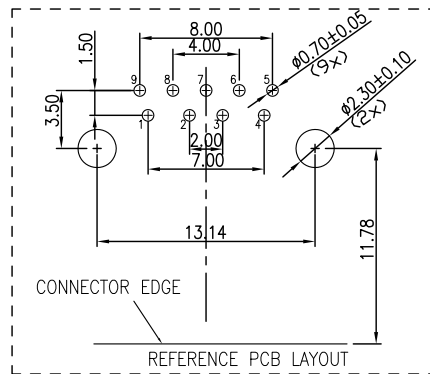


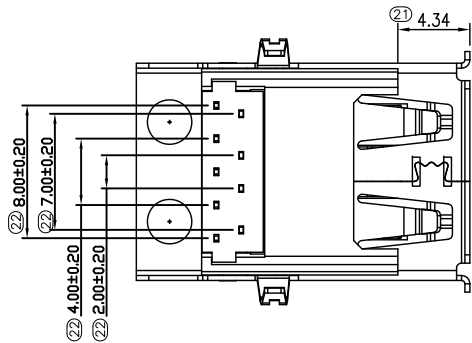


SPECIFICATIONS:

- 1.0 Electrical Performance:
- 1.1 Contact current Rating:
 - 1.80 Amperes for VBUS and GND contacts
 - 0.25 Amperes for all other contacts
- 1.2 Dielectric Withstanding Voltage:AC 100V/minute
- 1.3 Insulation resistance:100M ohms Min
- 1.4 Contact Resistance:
 - 30m ohm Max for VBUS and GND contacts
 - 50m ohm Max for all other contacts
- 2.0 Mechanical Performance:
- 2.1 Mating Force:35N Max
- 2.2 Unmating Force:10N Min;8N Min After Durability.
- 2.3 Durability:1500 cycles
- 3.0 Environmental Performance:
- 3.1 Temperature Range:
 - Operating Temperature:-55°C to+85°C
- 4.0 Material:
- 4.1 Housing:POLYPLASTICS LCP E130i blue UL94 V-0
- 4.2 Contact: A Contacts C5191R-H T=0.25MM and
B Contacts C2680R-H T=0.25MM
- 4.3 Shell:C2680R-H T=0.30MM.
- 5.0 PLATING:
- 5.1 Contact:Gold Plated on contact area See Table
MATTE Tin 100-300u"Plated on solder area
Nickel 50u"MIN Plated underplating over all.
- 5.2 Shell: Nickel Plated 80U".
- 6.0 "■"Shows FAI Inspection Items.

料号备注										T=PACK-T0157									
CU	3	F	381	D	X	X	X	X	X										
12=半金雾锡10"																			
13=半金雾锡30"																			
14=半金雾锡50"																			
15=半金雾锡150"																			
16=半金雾锡300"																			
03=LCP 蓝 铜壳电镀																			
										R=FOHS2.0标准									
										H=无齿+ROHS2.0									
										R=REACH标准									
										B=盐雾24H									
										C=盐雾48H									

Pin Number	Signal Name	 东莞市兴科杰鑫电子有限公司 Dong Guan XingKeJieXin Electronics Co.,Ltd									
1	VBUS	UNLESS OTHERWISE SPECIFIED TOLERANCES METRIC X. +/- 0.30 .X +/- 0.20 .XX +/- 0.15 ANGLES +/- 2.00° APPROVAL 制图 Jody 20.12.24									
2	D-										
3	D+										
4	GND										
5	SSRX-										
6	SSRX+	料号 SEE TABLE									
7	GND										
8	SSTX-	字张 工程图号: DWG-USBAF-443 版本: A0									
9	SSTX+										
Shell	Shield	DIMENSIONS (METRIC) (MM)		ANGLE OF PROJECTION 		比例 1 : 1 状态码 A 页数 1 OF 1					

REV.	ECN NO.	DESCRIPTION	DRAW	CHECK	APPD.	DATE
A0		新发行	Jody	BENDEE	BENDEE	2020. 12. 28

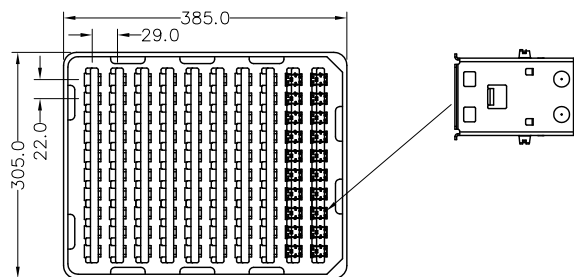


备注:

1. 包装要求整洁, 美观, 工整, 统一
2. 作业过程不可损坏产品, 轻拿轻放
3. 内外标签业务提供, 需按照标签上的数量对应包装数量粘贴。
4. 标签裁切必须按照标签边缘线裁切, 不可凹凸不平及偏斜。

包 装 信 息

每盘产品数	100pcs
每一扎盘数	15 盘
每一箱盘数	15 盘
每箱产品数	1500pcs
产品单重	2.54g
每箱净重	按实际称重为准
每箱毛重	按实际称重为准
注: 尾数以实际为准, 填充纸带保护, 另做标识	


品名	规格	用量
大透明胶	W=47 mm	若干
小透明胶	W=10 mm	若干
PE 膜	W=62 mm	若干
干燥剂	5g	2 包
钉书针	/	若干
标签	/	按图纸

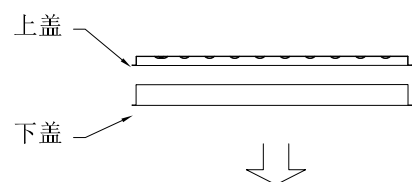

底部与顶部封“工”字型


#外箱标签

无卤标签




PE膜缠绕


1扎15盘
上下放纸板



PE袋

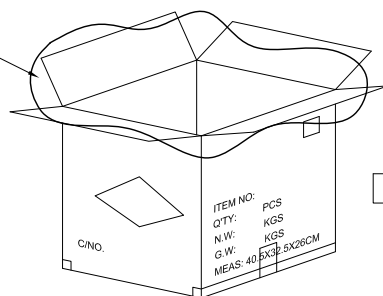

干燥剂

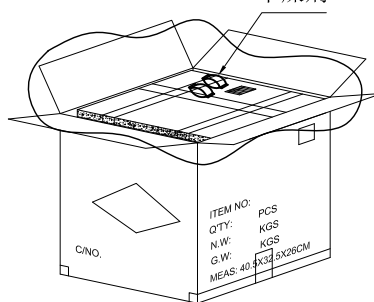

负责业务确认: _____

料 号	品 名	规格	单 位	用 量
PB001C134	载盘盒上盖	CONN B AF 90°DIP L=20.10mm 载盘盒上盖, PET透明	PCS	1/100
PB001C135	载盘盒下盖	CONN B AF 90°DIP L=20.10mm 载盘盒下盖	PCS	1/100
PP011C105	纸膜	K=K, 38.5*30.5CM	PCS	2/1500
PP001C096	外箱	外箱<=K, 外箱40.5*32.5*26CM	PCS	1/1500
PE031C005	PE袋	PE袋, 80*80CM T=0.05mm	PCS	1/1500



东莞市兴科杰鑫电子有限公司

DongGuan XingKeJieXin Electronics Co.,Ltd

所有物料与操作均符合ROHS管制标准

APPROVAL	日期	品名规格	CONN B AF 90° DIP L=20.10mm (安费诺专用) 包装规范
制图 Jody	20.12.28	料号	
审核		字 张	A4
核准		工程图号:	PACK-T0157
ANG LE OF PROJECTION		比例	1 : 1
		状态码	A
		页 数	1 OF 2
		版 本	A0