

HSF Compliant

REV.	ECN NO.	DESCRIPTION	DRAW	CHECK	APPD.	DATE
A0	-----	新发行	Elaine	—	—	2015.10.5
A1	ECN180518001	新增包装选项	Jody	BEEDEN	JOBS	2018.05.18
A2	ECN180820001	修改图面错误	Jody	BEEDEN	JOBS	2018.08.20

SPECIFICATIONS:

Contact current Rating:
1.8 Amperes for pin1&pin4.
0.25 Amperes other contacts



Dielectric Withstanding Voltage:AC 100V(RMS)
Insulation resistance:100Megohms Minimum.

Contact Resistance:
30mΩ Max for pin1&pin4
50mΩMax for other contacts

Mechanical Characteristics:
Mating Force:35 Newtons.Maximum
Unmating Force:10 Newtons.Minimum.
8N Min After Durability

MATERIAL:
Housing: PBT+30%GF 94V-0 COLOR:BLUE
Contact: 2.0 contacts C5191.
3.0 contacts C2680.

Shell: Brass/spcc
Operating Temperature:-55° to +85°

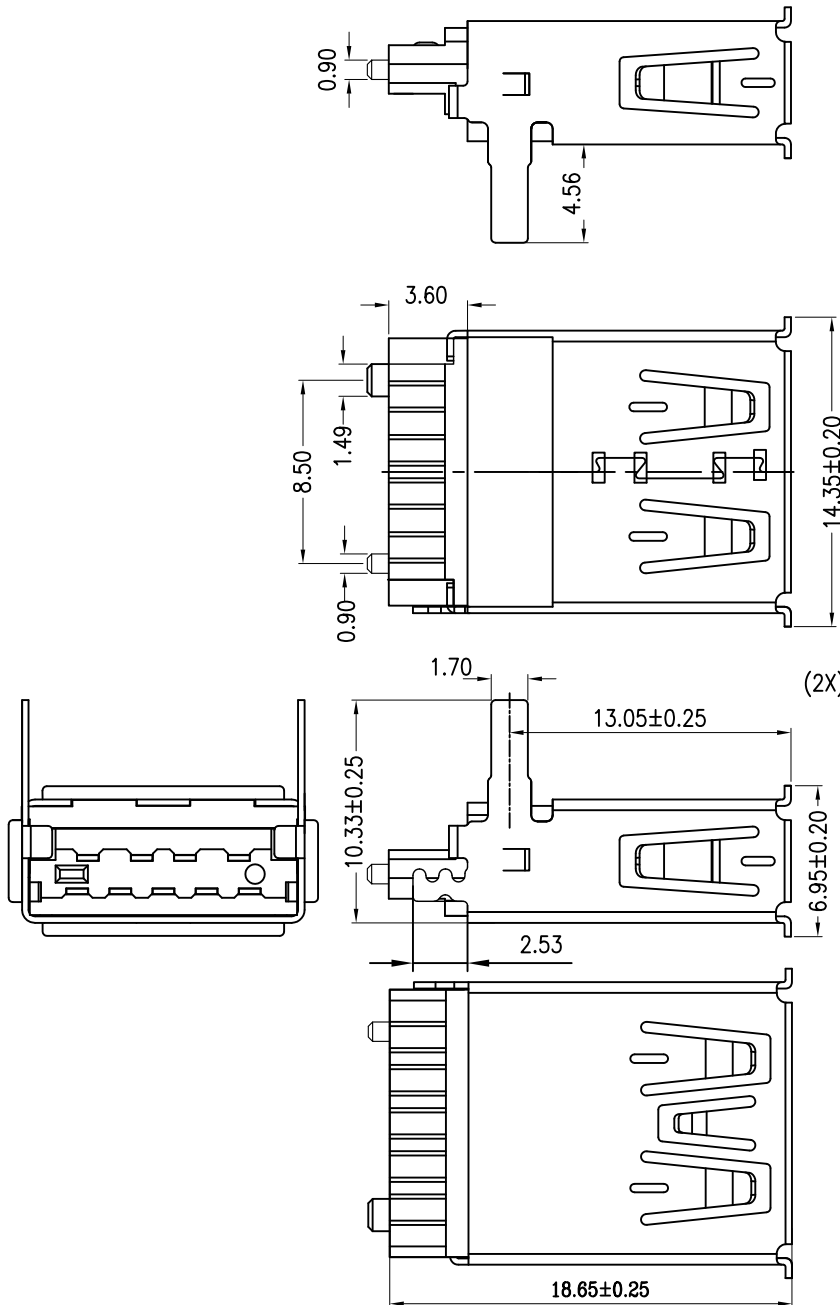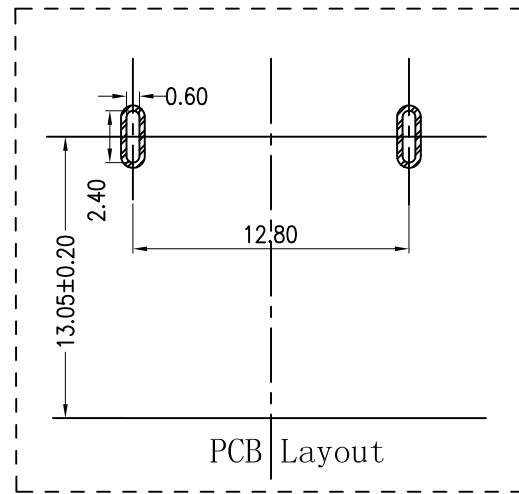

料号备注

T=PACK-T0032

CU 3 F 178 S XX X XX X X

12=半金雾锡10U"
13=半金雾锡30U"
14=半金雾锡50U"
15=半金雾锡150U"
16=半金雾锡300U"

00=PBT 蓝铜壳镀镍

R=ROHS2.0标准
W=无卤+ROHS2.0
H=REACH标准

B=盐雾24H
C=盐雾48H

Pin NUMBER	SIGNAL NAME		东莞市兴科杰鑫电子有限公司 Dong Guan XingKeJieXin Electronics Co., Ltd			
1	VBUS					
2	D-					
3	D+					
4	GND					
5	StdA_SSRX-					
6	StdA_SSRX+					
7	GND_DRAIN					
8	StdA_SSTX-					
9	StdA_SSTX+					
Shell	Shield					

UNLESS OTHERWISE SPECIFIED TOLERANCES		APPROVAL	日期	品名	USB 3.0 AF 180° 焊线式B款直脚 (外壳铆两脚 后塞LCP带定位柱)
METRIC		制图 Jody	2018.08.20	规格	
X . +/- 0.30		审核		料号	
.X +/- 0.25		核准		SEE TABLE	
.XX +/- 0.25		文件位置			字张
FRACTIONS +/-		ANGLE OF PROJECTION			工程图号:
ANGLES +/- 2.00°					DWG-USBAF-238
DIMENSIONS		比例			版本:
(METRIC)		1 : 1			A2
(MM)		状态码 A			
		页数 1 OF 1			

