


HSF Compliant

REV.	ECN NO.	DESCRIPTION	DRAW	CHECK	APPD.	DATE
X0	—	NEW	JASON	JASON	BENDEE	20-07-14
A0	ECN200921001	增加PCB夹持力	Nike	BENDEE	BENDEE	20-09-21

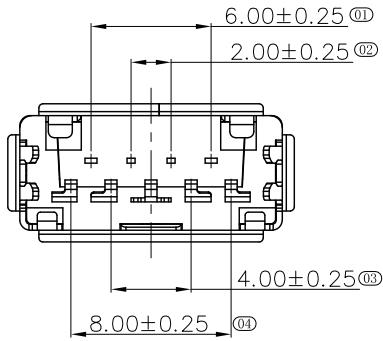






REMARKS:

- 1> T=1.0mm
- 2> T=0.80mm and T=1.2mm are also available on request.

REFERENCE PCB LAYOUT SCALE 1:2

SPECIFICATIONS:

- 1.Electrical Performance:
 - 1.1 Contact current Rating:
1.8 Amperes for VBUS and GND contacts.
0.25 Amperes for all other contacts.
 - 1.2 Dielectric Withstanding Voltage: AC 100V(RMS)
 - 1.3 Insulation resistance:100M ohms Min.
 - 1.4 Contact Resistance:
40m ohm Max,50m ohm Max After Durability.
 - 1.5 Voltage Rating : 30 Vac (rms).
- 2.Mechanical Performance:
 - 2.1 Durability:1500 cycles.
- 3.Environmental Performance:
 - 3.1 Temperature Range:
 - 3.1.1 Operating Temperature: -25°to+85°.
 - 3.1.2 Storage Temperature: -20°to+60°.
 - 3.1.3 Salt Spray 24h Min.
- 4.Material:
 - 4.1 Housing: See table,UL94-V0.
 - 4.2 Contact: Copper alloy.
 - 4.3 Shell: SUS304.
- 5.Plating specification:
 - 5.1 Contact: Au(See table) Plated on the functional area of contact; Tin Plated 80u"min on solder area;
Nickel 50u"Min underplating over all.
 - 5.2 Shell: Nickel 50u"Min plating over all.
- 6."**" Shows FAI measurement point.

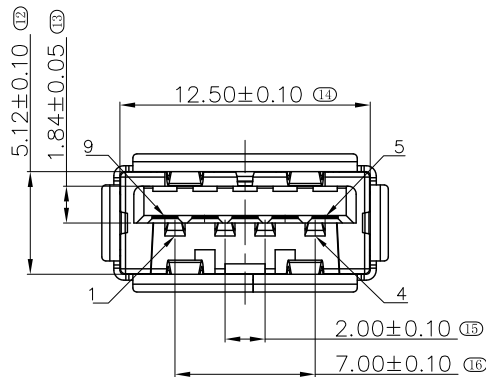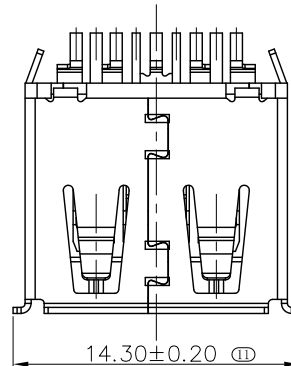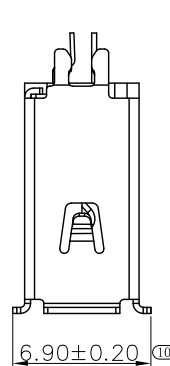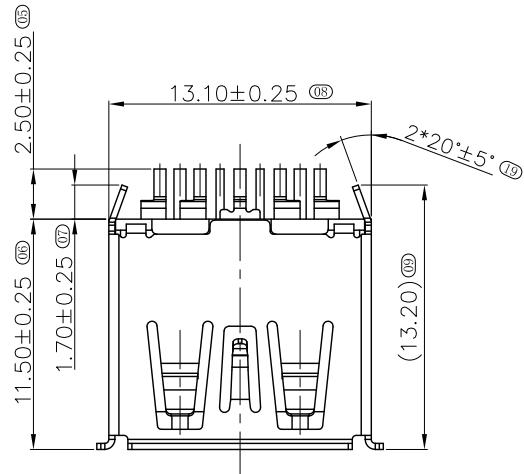

料号备注

CU 3 F 469 B XX T XX XX

T=PACK-T0203

12=半金锡10"
13=半金锡30"
14=半金锡50"
15=半金锡150"
16=半金锡300"

00=LCP蓝色300C

R=ROHS2.0标准
W=无卤+ROHS2.0
H=REACH标准

B=盐雾24H
C=盐雾48H

Pin NUMBER	SIGNAL NAME
1	VBUS
2	D-
3	D+
4	GND
5	StdA_SSRX-
6	StdA_SSRX+
7	GND_DRAIN
8	StdA_SSTX-
9	StdA_SSTX+
Shell	Shield








东莞市兴科杰鑫电子有限公司
Dong Guan XingKeJieXin Electronics Co.,Ltd

UNLESS OTHERWISE SPECIFIED TOLERANCES	METRIC
X. +/-	0.50
.X +/-	0.35
.XX +/-	0.25
FRACTIONS +/-	
ANGLES +/-	2.00°
DIMENSIONS	
(METRIC)	(MM)

APPROVAL	日期	品名
制图 Nike	2020.09.21	规格
审核		
核准		
文件位置		
ANGLE OF PROJECTION		

USB 3.1 AF 180° 直立式	版本.
[夹板T=1.0, H=11.5]	A0
料号	SEE TABLE
字张	工程图号:
A4	DWG-USBAF-531
北例	1 : 1
状态码	A
页数	1 OF 1

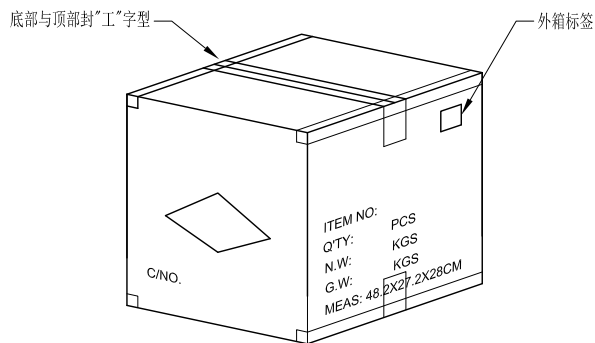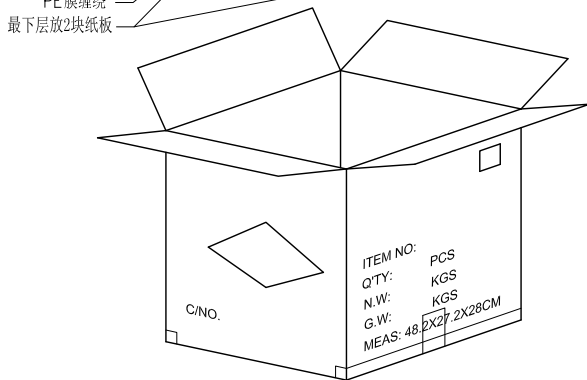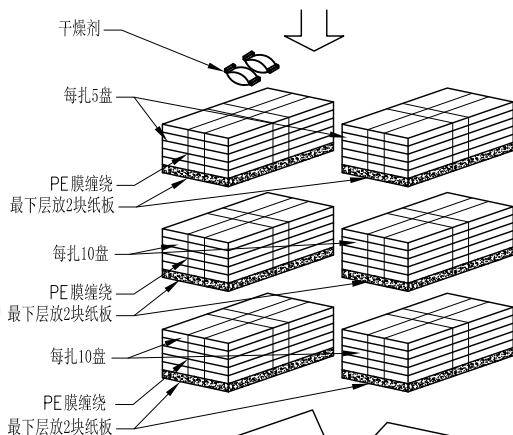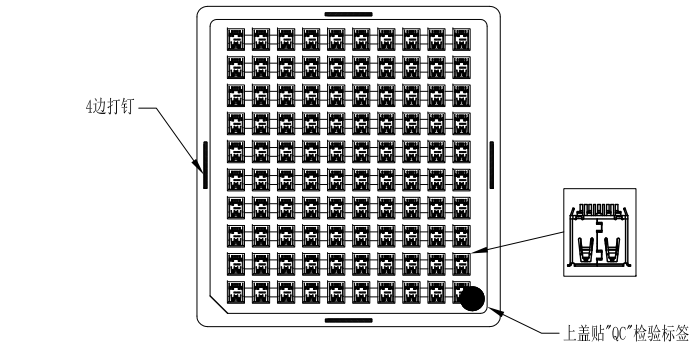

REV.	ECN NO.	DESCRIPTION	DRAW	CHECK	APPD.	DATE
A0	NA	NEW DRAWING	JASON	—	—	2020-05-09


备注:
1. 包装要求整洁, 美观, 工整, 统一
2. 作业过程不可损坏产品, 轻拿轻放

包 装 信 息	
每盘产品数	100pcs
每一扎盘数	见图
每一箱盘数	50盘
每箱产品数	5000pcs
产品单重	1.51g
每箱净重	以实际为准
每箱毛重	以实际为准
注: 尾数以实际为准, 填充纸带保护, 另做标识	

耗材		
品名	规格	用量
大透明胶	W=47mm	若干
小透明胶	W=10mm	若干
PE膜	W=62mm	若干
干燥剂	5g	2包
钉书针	/	若干
标签	/	按图纸

料 号	品 名	规 格	单 位	用 量
PB001C115	吸塑盘上盖	Conn C AF 180度 直立式 夹板T=1.0 H=11.5 吸塑盘上盖, PET透明	PCS	1/100
PB001C116	吸塑盘下盒	Conn C AF 180度 直立式 夹板T=1.0 H=11.5 吸塑盘下盒, PET透明	PCS	1/100
PP001C030	外箱	纸箱K=K, 外径48. 2*27. 2*28CM	PCS	1/5000
PP011C003	纸板	K=K, 21*26CM	PCS	6/5000

 东莞市兴科杰鑫电子有限公司
DongGuan XingKeJieXin Electronics Co.,Ltd

所有物料与操作均符合ROHS管制标准	APPROVAL		日期	品名	Conn C AF 180度 直立式 夹板T=1.0 H=11.5 包装规范
	制图	JASON	2020.05.09	规格	
	审核			料号	
	核准			字张	
ANGLE OF PROJECTION		工程图号: PACK-T0203		版本:	A0
		比例	1 : 1	状态码	
		页数	1	OF 1	