


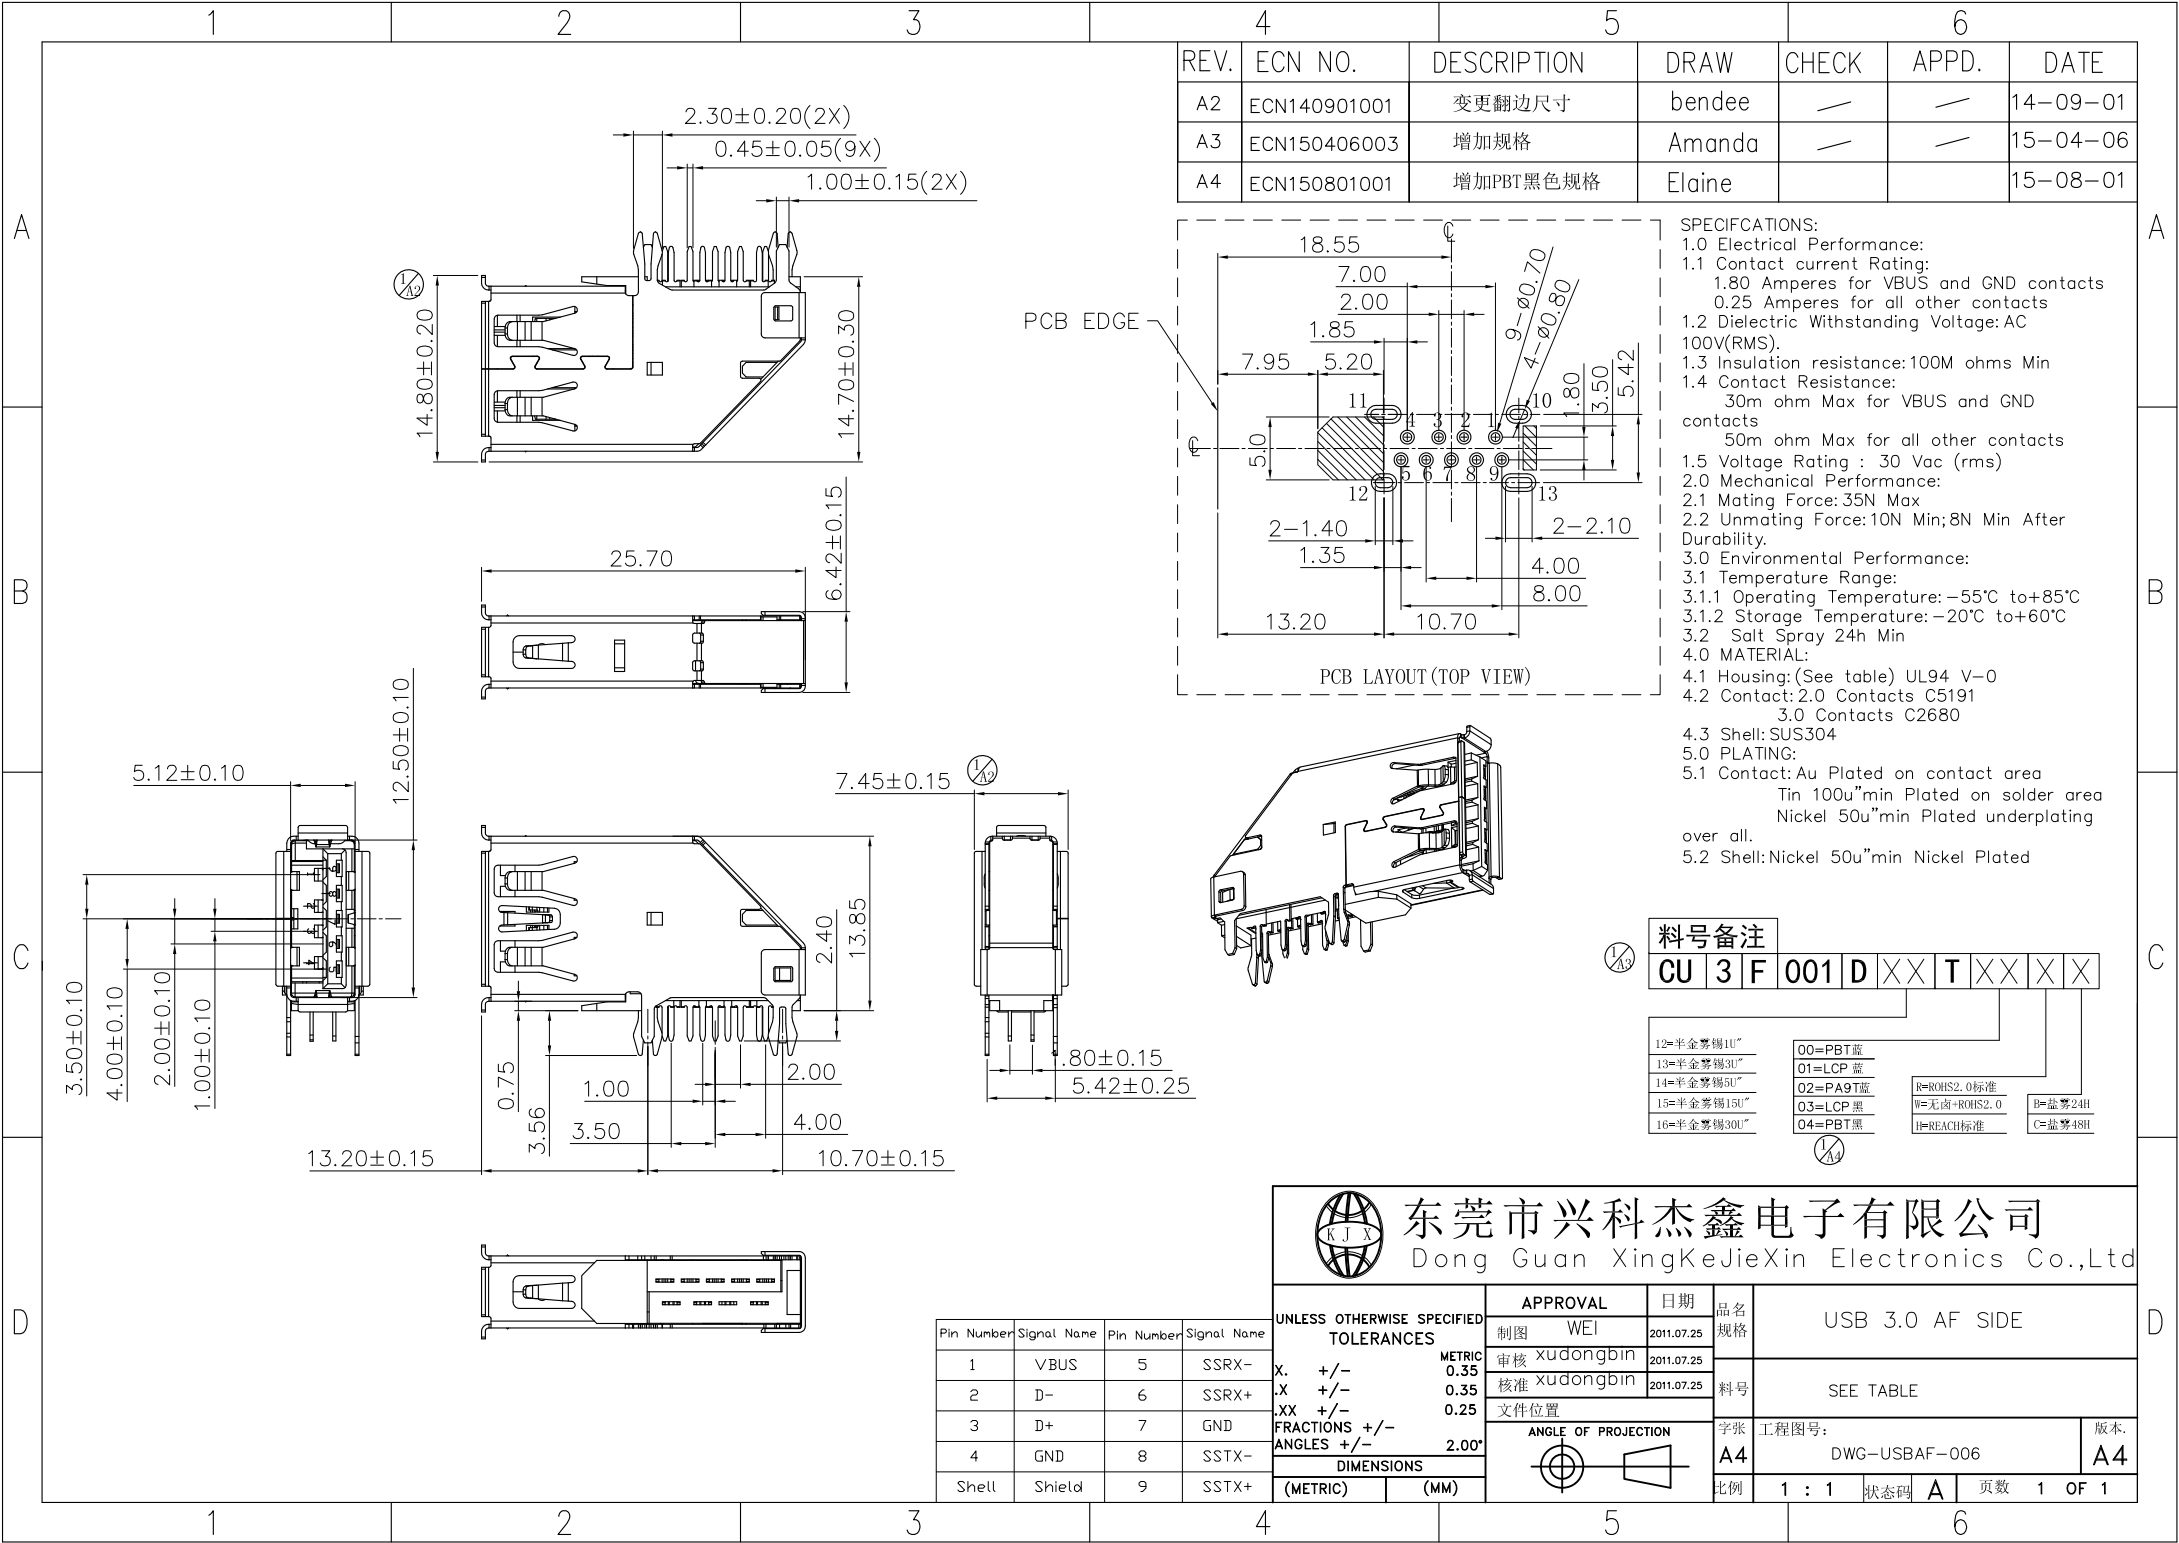

REV.	ECN NO.	DESCRIPTION	DRAW	CHECK	APPD.	DATE
A2	ECN140901001	变更翻边尺寸	bendee	—	—	14-09-01
A3	ECN150406003	增加规格	Amanda	—	—	15-04-06
A4	ECN150801001	增加PBT黑色规格	Elaine			15-08-01

SPECIFICATIONS:

1.0 Electrical Performance:

1.1 Contact current Rating:

1.80 Amperes for VBUS and GND contacts

0.25 Amperes for all other contacts

1.2 Dielectric Withstanding Voltage: AC

100V(RMS).

1.3 Insulation resistance: 100M ohms Min

1.4 Contact Resistance:

30m ohm Max for VBUS and GND

contacts

50m ohm Max for all other contacts

1.5 Voltage Rating : 30 Vac (rms)

2.0 Mechanical Performance:

2.1 Mating Force: 35N Max

2.2 Unmating Force: 10N Min; 8N Min After Durability.

3.0 Environmental Performance:

3.1 Temperature Range:

3.1.1 Operating Temperature: -55°C to +85°C

3.1.2 Storage Temperature: -20°C to +60°C

3.2 Salt Spray 24h Min

4.0 MATERIAL:

4.1 Housing: (See table) UL94 V-0

4.2 Contact: 2.0 Contacts C5191

3.0 Contacts C2680

4.3 Shell: SUS304

5.0 PLATING:

5.1 Contact: Au Plated on contact area

Tin 100u"min Plated on solder area

Nickel 50u"min Plated underplating

over all.

5.2 Shell: Nickel 50u"min Nickel Plated

料号备注

CU 3 F 001 D XX T XX XX

12=半金雾锡1U"
13=半金雾锡3U"
14=半金雾锡5U"
15=半金雾锡15U"
16=半金雾锡30U"

00=PBT 蓝
01=LCP 蓝
02=PA9T 蓝
03=LCP 黑
04=PBT 黑

R=ROHS2.0标准
W=无卤+ROHS2.0
I=REACH标准

P=盐雾24H
C=盐雾48H



东莞市兴科杰鑫电子有限公司

Dong Guan XingKeJieXin Electronics Co.,Ltd






Pin Number	Signal Name	Pin Number	Signal Name
1	VBUS	5	SSRX-
2	D-	6	SSRX+
3	D+	7	GND
4	GND	8	SSTX-
Shell	Shield	9	SSTX+

UNLESS OTHERWISE SPECIFIED TOLERANCES		APPROVAL		日期	品名	规格	
X. +/-		制图 WEI		2011.07.25	料号	USB 3.0 AF SIDE	
.X +/-		审核 xudongbin		2011.07.25		SEE TABLE	
.XX +/-		核准 xudongbin		2011.07.25			
FRACTIONS +/-		文件位置			字张		工程图号:
ANGLES +/-		ANGLE OF PROJECTION			A4		DWG-USBAF-006
DIMENSIONS					版本:		A4
(METRIC)					比例		1 : 1
(MM)					状态码		A
					页数		1 OF 1

REV.	ECN NO.	DESCRIPTION	DRAW	CHECK	APPD.	DATE
A0	NA	新发行	Elaine			17-06-20

备注:

1. 包装要求整洁, 美观, 工整, 统一
2. 作业过程不可损坏产品, 轻拿轻放

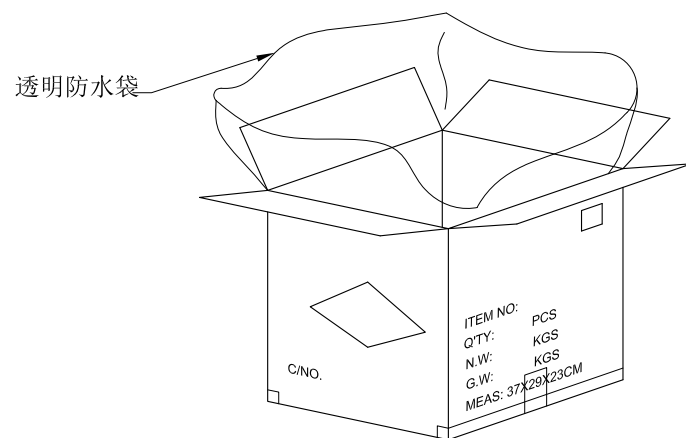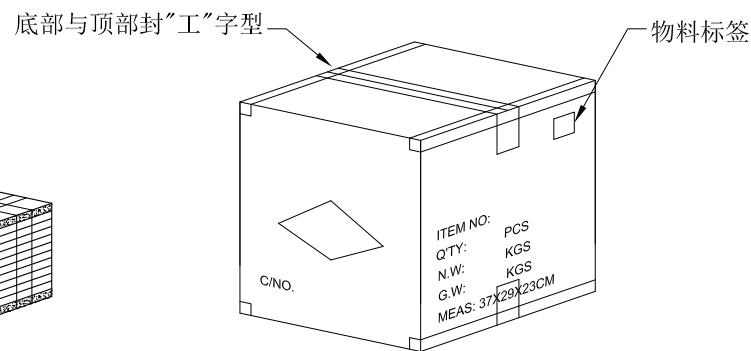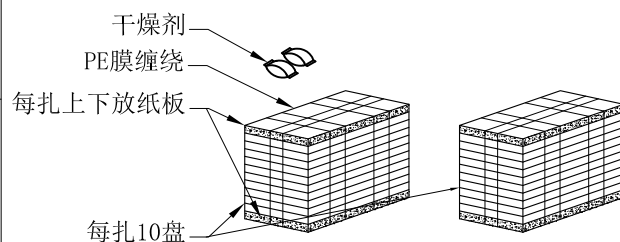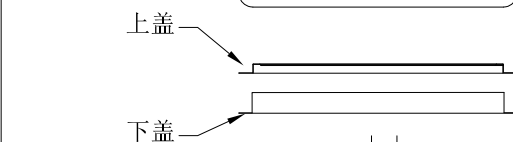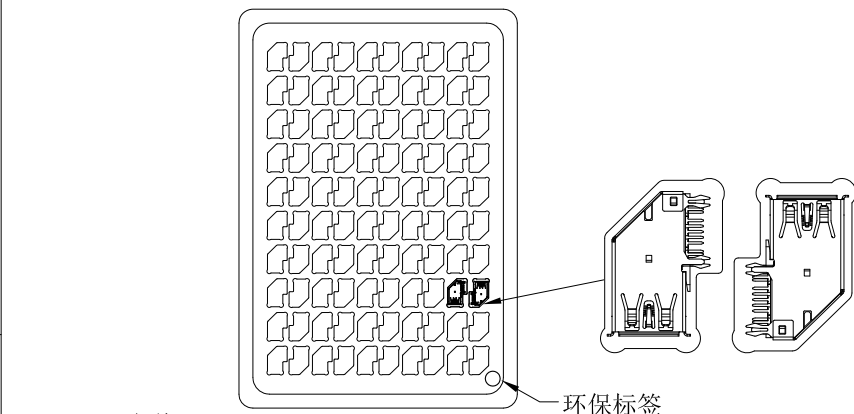

包 装 信 息	
每盘产品数	100pcs
每一扎盘数	按图纸
每一箱盘数	20 盘
每箱产品数	2000pcs
产品单重	3.43g
每箱净重	6.86KG
每箱毛重	以实际为准
注：尾数以实际为准, 填充纸带保护，另做标识	

耗材		
品名	规格	用量
大透明胶	W=47mm	若干
小透明胶	W=10mm	若干
PE 膜	W=62mm	若干
干燥剂	5g	2 包
钉书针	/	/
标签	/	按图纸

料 号	品 名	规格	单 位	用 量
PB001C001	吸塑盘上盖	Conn B AF ??????,PET??	PCS	1/100
PB001C002	吸塑盘下盒	Conn B AF ??????,PET??	PCS	1/100
PP011C006	纸板	K=K,35*27CM	PCS	4/2000
PP001C002	外箱	?? K=K,?? 37*29*23CM	PCS	1/2000
PF031C005	防水袋	PE3.80*80CM I=0.05mm	PCS	1/2000



东莞市兴科杰鑫电子有限公司

DongGuan XingKeJieXin Electronics Co.,Ltd

所有物料与操作均符合RHS 管制标准

APPROVAL		日期	品名		规格		Conn B AF 90度 侧插包规	
制图 Elaine		2018.11.10	审核					
核准			料号					
			字张 A4		工程图号： PACK-T0018			版本 A0
比例			1 : 1		状态码		C	页数 1 OF 1

