


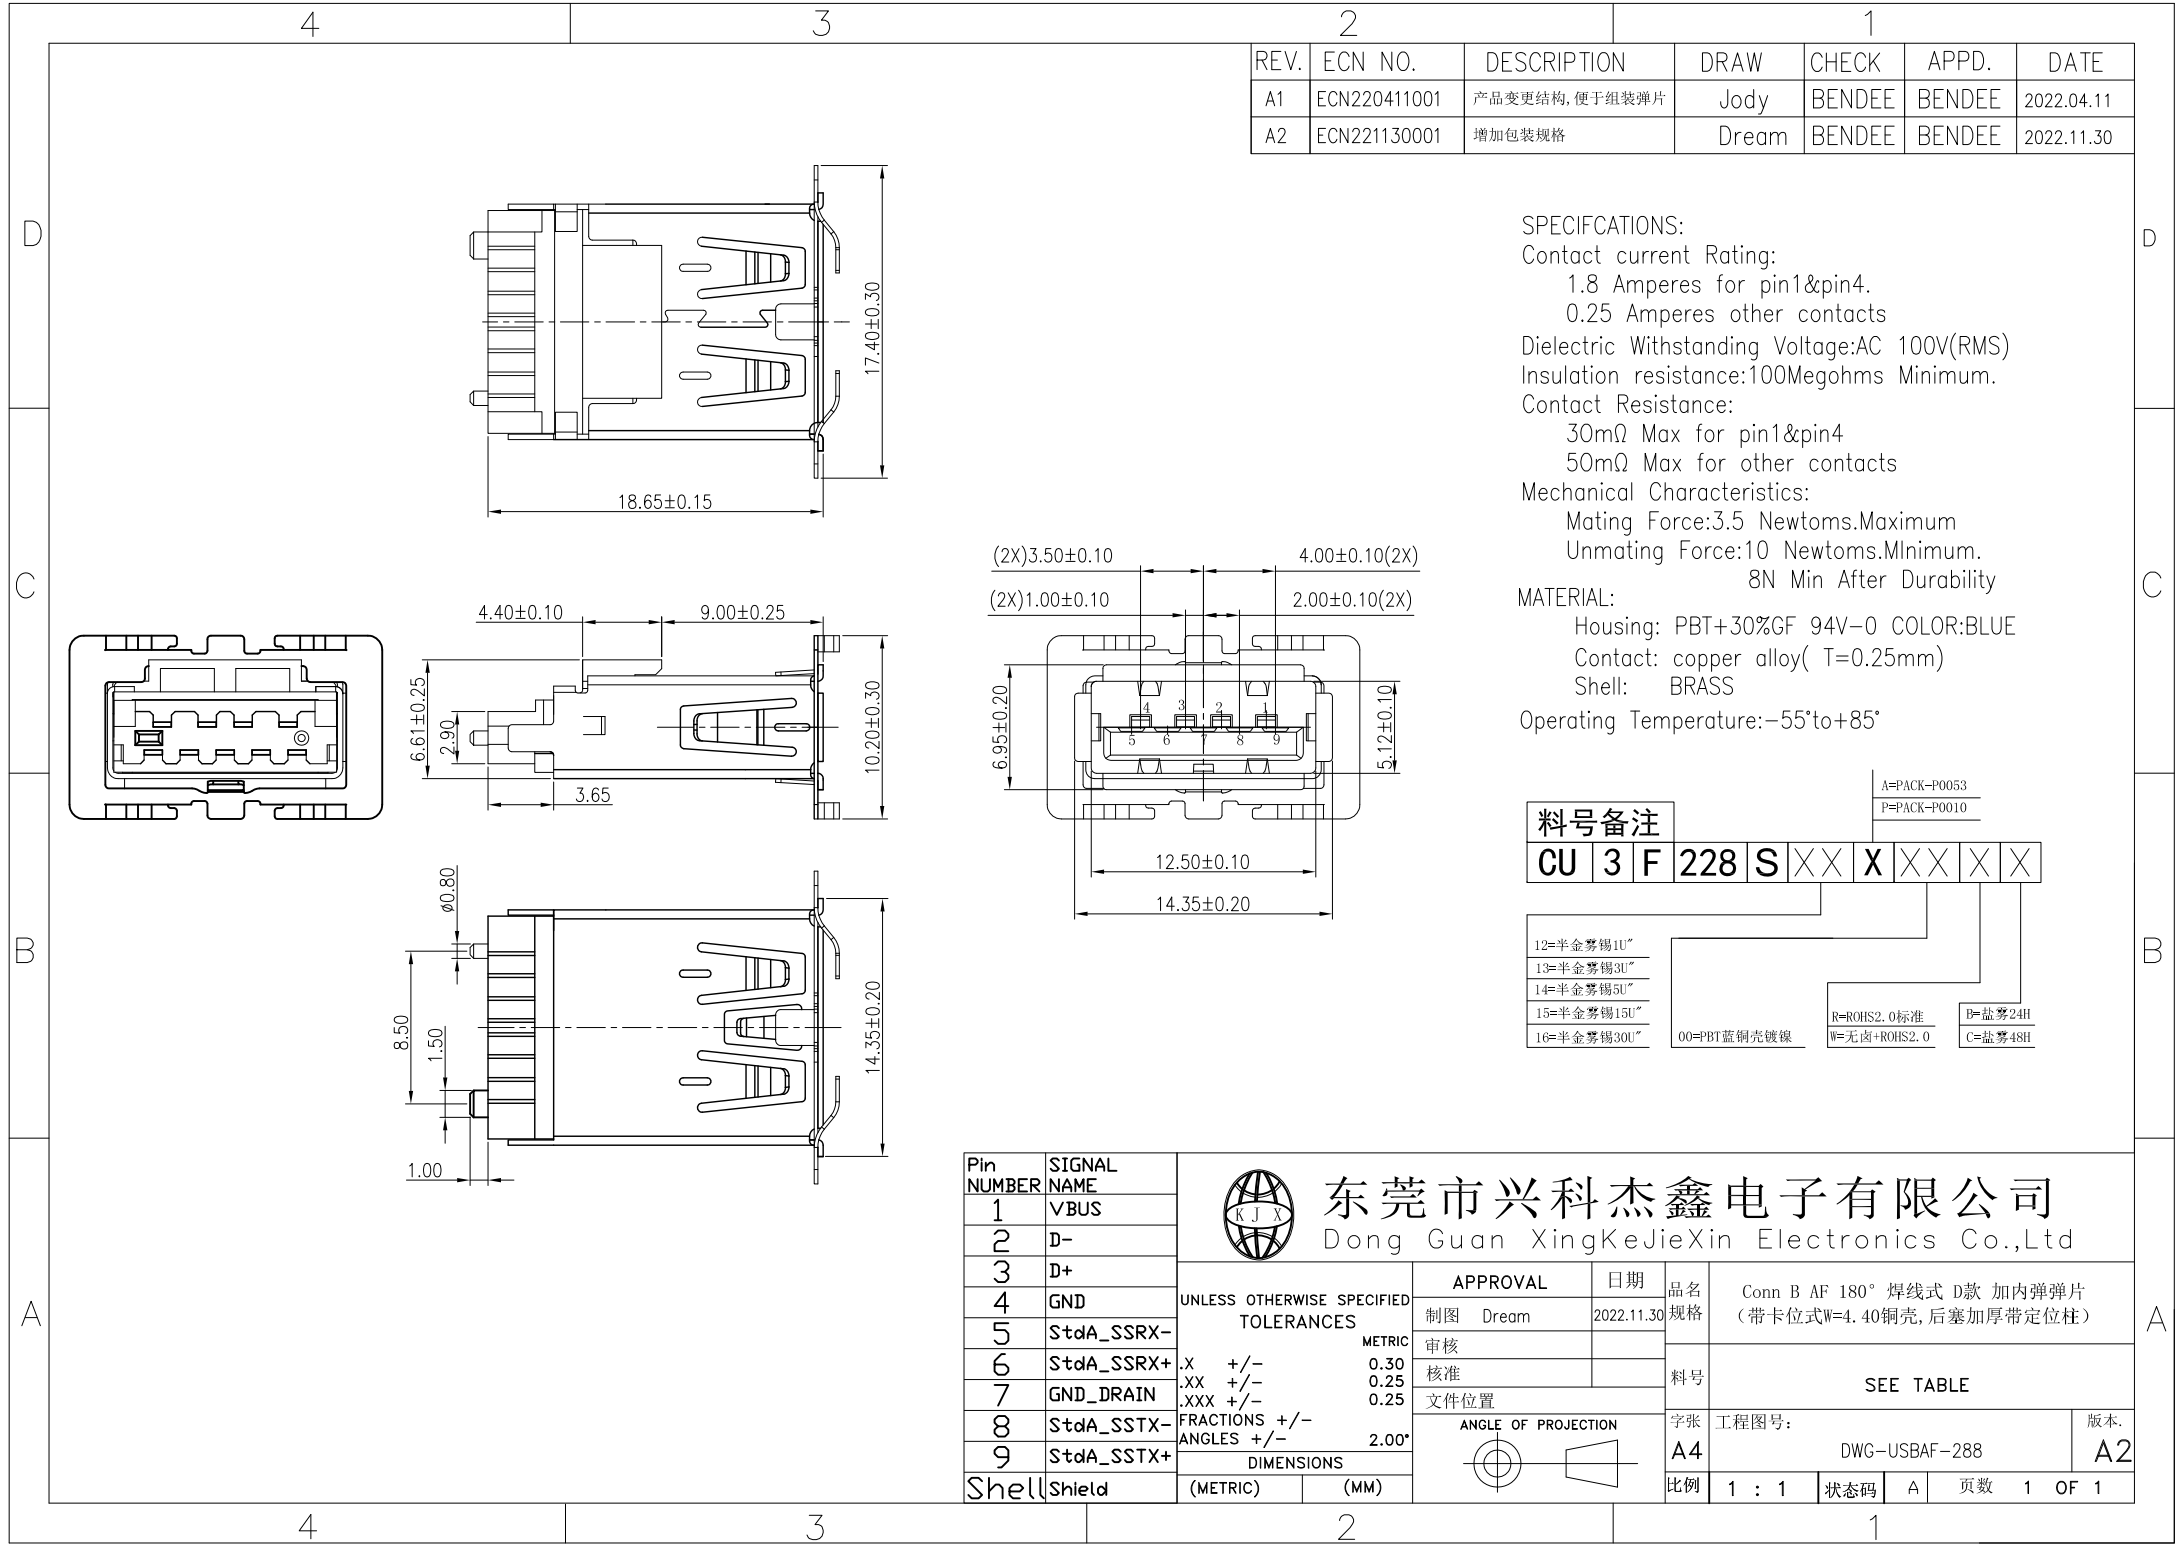

REV.	ECN NO.	DESCRIPTION	DRAW	CHECK	APPD.	DATE
A1	ECN220411001	产品变更结构, 便于组装弹片	Jody	BENDEE	BENDEE	2022.04.11
A2	ECN221130001	增加包装规格	Dream	BENDEE	BENDEE	2022.11.30

SPECIFICATIONS:

Contact current Rating:

1.8 Amperes for pin1&pin4.

0.25 Amperes other contacts

Dielectric Withstanding Voltage:AC 100V(RMS)

Insulation resistance:100Megohms Minimum.

Contact Resistance:

30mΩ Max for pin1&pin4

50mΩ Max for other contacts

Mechanical Characteristics:

Mating Force:3.5 Newtoms.Maximum

Unmating Force:10 Newtoms.Minlimum.

8N Min After Durability

MATERIAL:

Housing: PBT+30%GF 94V-0 COLOR:BLUE


Contact: copper alloy(T=0.25mm)

Shell: BRASS

Operating Temperature:-55°to+85°

料号备注									
CU	3	F	228	S	XX	X	XX	XX	XX

12=半金雾锡1U"	A=PACK-P0053
13=半金雾锡3U"	P=PACK-P0010
14=半金雾锡5U"	
15=半金雾锡15U"	
16=半金雾锡30U"	
00=PBT蓝铜壳镀镍	R=ROHS2.0标准
	W=无卤+ROHS2.0
	D=盐雾24H
	C=盐雾48H

Pin NUMBER	SIGNAL NAME	东莞市兴科杰鑫电子有限公司 Dong Guan XingKeJieXin Electronics Co.,Ltd										
1	VBUS	UNLESS OTHERWISE SPECIFIED TOLERANCES		APPROVAL		日期	品名规格	Conn B AF 180° 焊线式 D款 加内弹弹片 (带卡位式W=4.40铜壳, 后塞加厚带定位柱)				
2	D-			制图 Dream		2022.11.30						
3	D+			审核								
4	GND			核准								
5	StdA_SSRX-			文件位置								
6	StdA_SSRX+	.X	+/-	0.30	料号		SEE TABLE					
7	GND_DRAIN	.XX	+/-	0.25								
		.XXX	+/-	0.25								
8	StdA_SSTX-	FRACTIONS +/-		ANGLE OF PROJECTION		字张	工程图号:			版本.		
9	StdA_SSTX+	ANGLES +/-		2.00°		A4						
		DIMENSIONS				DWG-USBAF-288			A2			
ShellShield		(METRIC)									(MM)	
						比例	1 : 1	状态码	A	页数	1 OF 1	