

HSF Compliant

REV.	ECN NO.	DESCRIPTION	DRAW	CHECK	APPD.	DATE
A0	/	新版发行	Andrey	BENDEE	BENDEE	2019.11.12
A1	ECN200804001	增加包装规格	Jody	BENDEE	BENDEE	2020.08.04

Specifications:

1.Material:

- 1.1 Housing: LCP BLACK,UL94-V0.
- 1.2 Contact: C5210,T=0.30mm
- 1.3 Ground plates: SUS304,T=0.20mm

2.Plating specification:

- 2.1 Contact: Au(see table) plated on the functional area of contact; Tin plated 80u"min on solder area; Nickel 50u"min underplating over all.
- 2.2 Ground plates: Nickel 50u"min plating over all.


3.Electrical performance:

- 3.1 Contact resistance: 30mΩ max.
- 3.2 Dielectric withstanding voltage: AC 500V(rms).
- 3.3 Insulation resistance: 500MΩ min.
- 3.4 Contact current rating:
 - 1.25A for all the pin.

- 3.5 Voltage rating: 125 Vac (rms).

4.mechanical performance:

- 4.1 Mating force: 20.6N
- 4.2 Unmating force: 0.98N Min, hook without barb
- 4.3 Durability: 15,00 cycles.

RECOMMENDED PCB LAYOUT
T=1.00mm,TOLERANCES ±0.05

CAV. No

All of Pins

料号备注

RJ 0 F 026 M XX X XX X X

B=REEL-R0128
A=REEL-R0127
R=REEL-R010012=半金零锡15U"
13=半金零锡30U"
14=半金零锡50U"
15=半金零锡150U"
16=半金零锡300U"

00=LCP 黑

R=ROHS2.0标准
W=无卤+ROHS2.0
H=REACH标准B=盐雾24H
C=盐雾48H东莞市兴科杰鑫电子有限公司
Dong Guan XingKeJieXin Electronics Co.,LtdUNLESS OTHERWISE SPECIFIED
TOLERANCESX. +/- METRIC 0.30
.X +/- 0.25
.XX +/- 0.15
FRACTIONS +/-
ANGLES +/- 2.00'

DIMENSIONS

(METRIC) (MM)

APPROVAL

制图 Jody

审核

核准

文件位置

日期

2020.08.04

品名

规格

料号

字张

工程图号:

版本:

A4

比例

1 : 1

状态码

A

页数

1 OF 1

DWG-RJF-026

A1

RJ45 90° SMT 全塑 H=12.30mm

SEE TABLE

DWG-RJF-026

A1

1 : 1

状态码

A

页数

1 OF 1

DWG-RJF-026

A1

RJ45 90° SMT 全塑 H=12.30mm

SEE TABLE

DWG-RJF-026

A1

1 : 1

状态码

A

页数

1 OF 1

DWG-RJF-026

A1

RJ45 90° SMT 全塑 H=12.30mm

SEE TABLE

DWG-RJF-026

A1

1 : 1

状态码

A

页数

1 OF 1

DWG-RJF-026

A1

RJ45 90° SMT 全塑 H=12.30mm

SEE TABLE

DWG-RJF-026

A1

1 : 1

状态码

A

页数

1 OF 1

DWG-RJF-026

A1

RJ45 90° SMT 全塑 H=12.30mm

SEE TABLE

DWG-RJF-026

A1

1 : 1

状态码

A

页数

1 OF 1

DWG-RJF-026

A1

RJ45 90° SMT 全塑 H=12.30mm

SEE TABLE

DWG-RJF-026

A1

1 : 1

状态码

A

页数

1 OF 1

DWG-RJF-026

A1

RJ45 90° SMT 全塑 H=12.30mm

SEE TABLE

DWG-RJF-026

A1

1 : 1

状态码

A

页数

1 OF 1

DWG-RJF-026

A1

RJ45 90° SMT 全塑 H=12.30mm

SEE TABLE

DWG-RJF-026

A1

1 : 1

状态码

A

页数

1 OF 1

DWG-RJF-026

A1

RJ45 90° SMT 全塑 H=12.30mm

SEE TABLE

DWG-RJF-026

A1

1 : 1

状态码

A

页数

1 OF 1

DWG-RJF-026

A1

RJ45 90° SMT 全塑 H=12.30mm

SEE TABLE

DWG-RJF-026

A1

1 : 1

状态码

A

页数

1 OF 1

DWG-RJF-026

A1

RJ45 90° SMT 全塑 H=12.30mm

SEE TABLE

DWG-RJF-026

A1

1 : 1

状态码

A

页数

1 OF 1

DWG-RJF-026

A1

RJ45 90° SMT 全塑 H=12.30mm

SEE TABLE

DWG-RJF-026

A1

1 : 1

状态码

A

页数

1 OF 1

DWG-RJF-026

A1

RJ45 90° SMT 全塑 H=12.30mm

SEE TABLE

DWG-RJF-026

A1

1 : 1

状态码

A

页数

1 OF 1

DWG-RJF-026

A1

RJ45 90° SMT 全塑 H=12.30mm

SEE TABLE

DWG-RJF-026

A1

1 : 1

状态码

A

页数

1 OF 1

DWG-RJF-026

A1

RJ45 90° SMT 全塑 H=12.30mm

SEE TABLE

DWG-RJF-026

A1

1 : 1

状态码

A

页数

1 OF 1

DWG-RJF-026

A1

RJ45 90° SMT 全塑 H=12.30mm

SEE TABLE

DWG-RJF-026

A1

1 : 1

状态码

A

页数

1 OF 1

DWG-RJF-026

A1

RJ45 90° SMT 全塑 H=12.30mm

SEE TABLE

DWG-RJF-026

A1

1 : 1

状态码

A

页数

1 OF 1

DWG-RJF-026

A1

RJ45 90° SMT 全塑 H=12.30mm

SEE TABLE

DWG-RJF-026

A1

1 : 1

状态码

A

页数

1 OF 1

DWG-RJF-026

A1

RJ45 90° SMT 全塑 H=12.30mm

SEE TABLE

DWG-RJF-026

A1

1 : 1

状态码

A

页数

1 OF 1

DWG-RJF-026

A1

RJ45 90° SMT 全塑 H=12.30mm

SEE TABLE

DWG-RJF-026

A1

1 : 1

状态码

A

页数

1 OF 1

DWG-RJF-026

A1

RJ45 90° SMT 全塑 H=12.30mm

SEE TABLE

DWG-RJF-026

A1

1 : 1

状态码

A

页数

1 OF 1

DWG-RJF-026

A1

RJ45 90° SMT 全塑 H=12.30mm

SEE TABLE

DWG-RJF-026

A1

1 : 1

状态码

A

页数

1 OF 1

DWG-RJF-026

A1

RJ45 90° SMT 全塑 H=12.30mm

SEE TABLE

DWG-RJF-026

A1

1 : 1

状态码

A

页数

1 OF 1

DWG-RJF-026

A1

RJ45 90° SMT 全塑 H=12.30mm

SEE TABLE

DWG-RJF-026

A1

1 : 1

状态码

A

页数

1 OF 1

DWG-RJF-026

A1

RJ45 90° SMT 全塑 H=12.30mm

SEE TABLE

DWG-RJF-026

A1

1 : 1

状态码

A


页数

1 OF 1



DWG-RJF-026

普通包装

4		5		6		
REV.	ECN NO.	DESCRIPTION	DRAW	CHECK	APPD.	DATE
A0	—————	New Release	Andrey	BENDEE	BENDEE	2019.11.21
A1	ECN201229002	修改包装方式	Jody	BENDEE	BENDEE	2020.12.29

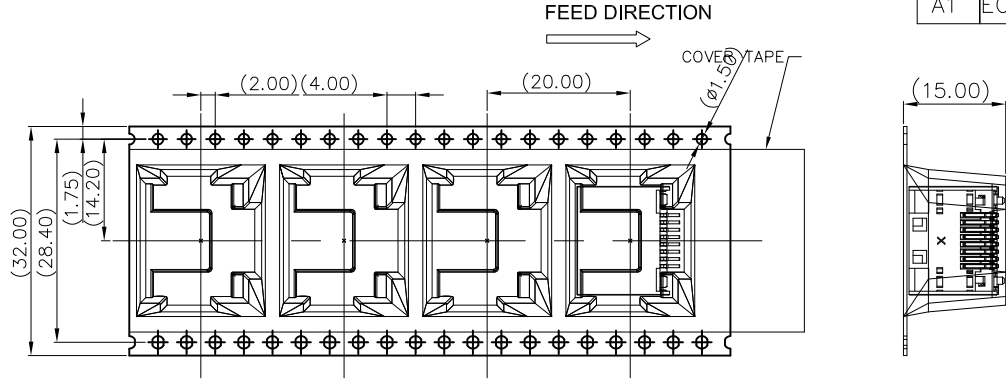

包 装 信 息	
每盘产品数	200pcs
每箱卷盘数	6卷
每箱产品数	1200pcs
产品单重	1.90g
每箱净重	以实际为准
每箱毛重	以实际为准

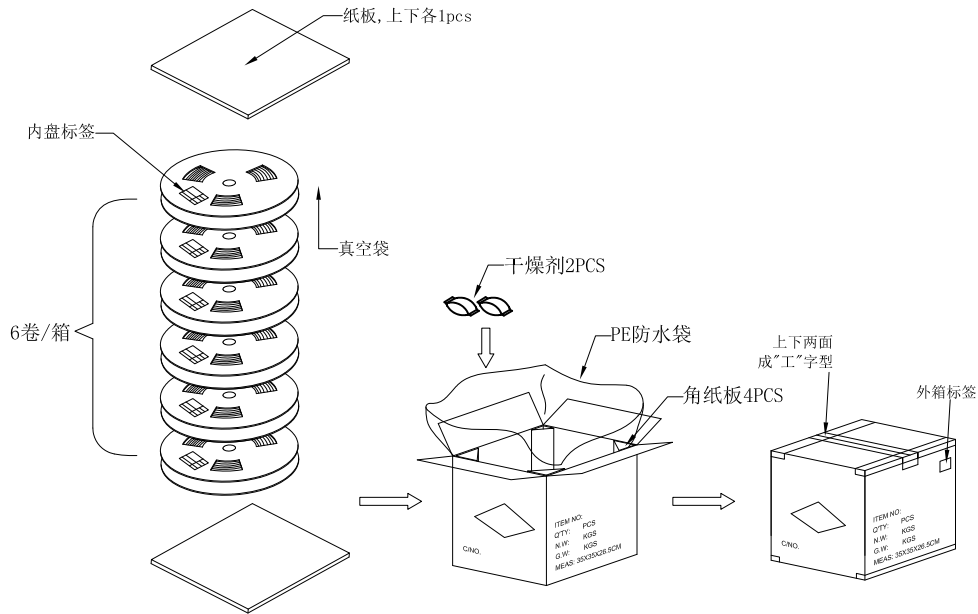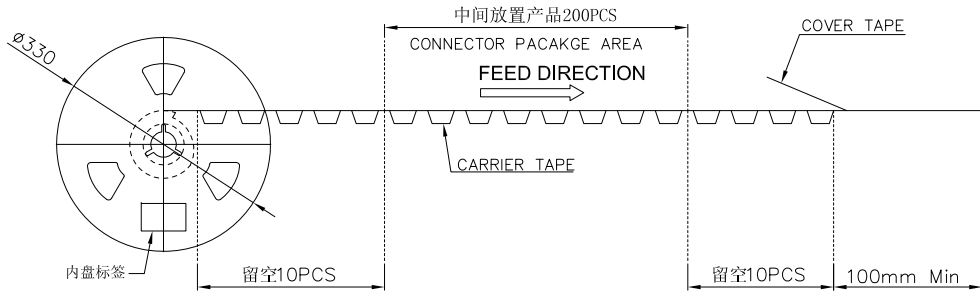

料号	品名	规格	单位	用量
PB031C074	RJ45 SMT母座 载带	W=32mm PH=20mm PET透明 T=0.5mm	PCS	1/200
PB031C016	自粘上封带	T=0.05mm、W=25.5mm 透明上带	M	4.8
PP011C009	纸板	33*33cm A=B, 纸板	PCS	2/1200
PP011C010	三角板	W31*H25cm A=B, 角纸板	PCS	4/1200
PP001C043	外箱	K=K, 外径35*35*26.5cm	PCS	1/1200
PE031C005	防水袋	PE袋, 80cmx80cm, T=0.05mm	PCS	1/1200



东莞市兴科杰鑫电子有限公司

DongGuan XingKeJieXin Electronics Co.,Ltd

所有物料与操作均符合ROHS管制标准	APPROVAL	日期	品名 规格	RJ45 90° SMT 全塑 H=12.30mm 卷盘包装规范					
	制图 Jody	20.12.29		料号					
	审核								
	核准								
	文件位置								
	ANGLE OF PROJECTION 			字张 A4	工程图号： PACK-R0100			版本 A1	
比例	1 : 1	状态码	C	页数	1	OF	1		

