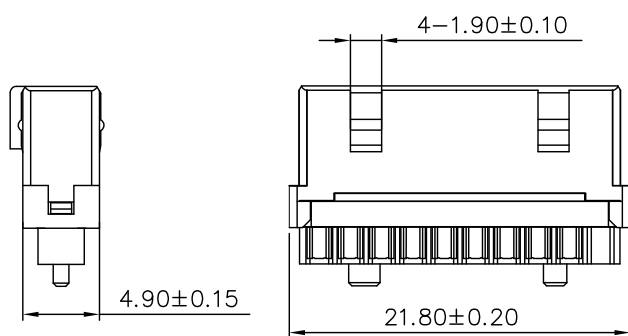
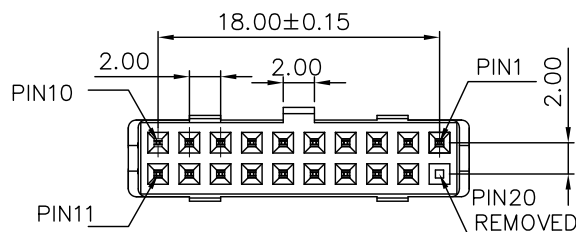
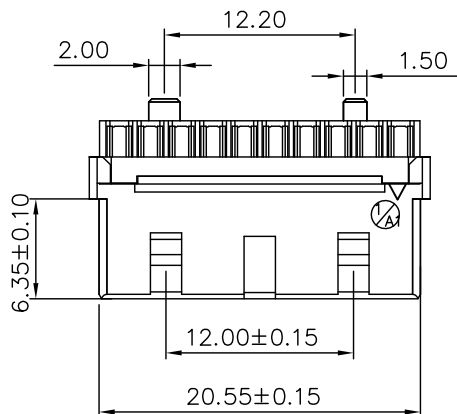


REV.	ECN NO.	DESCRIPTION	DRAW	CHECK	APPD.	DATE
A0	-----	NEW	xu dong bin	—	—	4-11-20
A1	ECN160719001	共模主体图面增加“Δ”符号 已便统一辨识	WANG JIN BAO			6-07-19

SPECIFICATIONS:

Contact current Rating:

0.5 Amperes per pin minimum for signals.

1.5 Amperes per pin minimum for VBUS

Dielectric Withstanding Voltage: AC 100V(RMS)

Insulation resistance: 100Megohms Minimum.

Contact Resistance:

Initial: 30mΩ Max for mated connector

final(after stress) 50mΩMax

Mechanical Characteristics:

Mating Force: 35 Newtons.Maximum

Unmating Force: 15 Newtons.Minimum.

Durability : 25 cycles done at a max rate
for 200 cycles per hour

MATERIAL:

Housing: PBT+30%GF&PA66+30%GF 94V-0
COLOR: BLUE/BLACK

Contact: copper alloy

COVER : LCP+30%GF 94V-0 COLOR: BLACK

PLATING:

contact : Au plated on contact area

Tin plated on solder tail area

Nickel underplating overall

operating Temperature: -55°to+85°

料号备注:

C13F034SXXPXXR


"12" 半金镀G/F "00"--PA66盖
"14" 半金镀5U "01"--PBT盖
"15" 半金镀15U"
"16" 半金镀30U"



东莞市兴科杰鑫电子有限公司

Dong Guan XingKeJieXin Electronics Co.,Ltd

UNLESS OTHERWISE SPECIFIED TOLERANCES		APPROVAL	日期	品名	3.0 IDC 20PIN FEMALE(B TYPE)	
X. +/-	METRIC 0.30	制图 BENDEE	2014.11.20	规格	SEE TABLE	
.X +/-	0.25	审核 BENDEE	2014.11.20	料号		
.XX +/-	0.25	核准 BENDEE	2014.11.20	文件位置		
FRACTIONS +/-	2.00"	ANGLE OF PROJECTION		字张	工程图号:	版本:
ANGLES +/-				A4	DWG-IDC20-035	A1
DIMENSIONS				比例	1 : 1	状态码 A
(METRIC)	(MM)				1 OF 1	

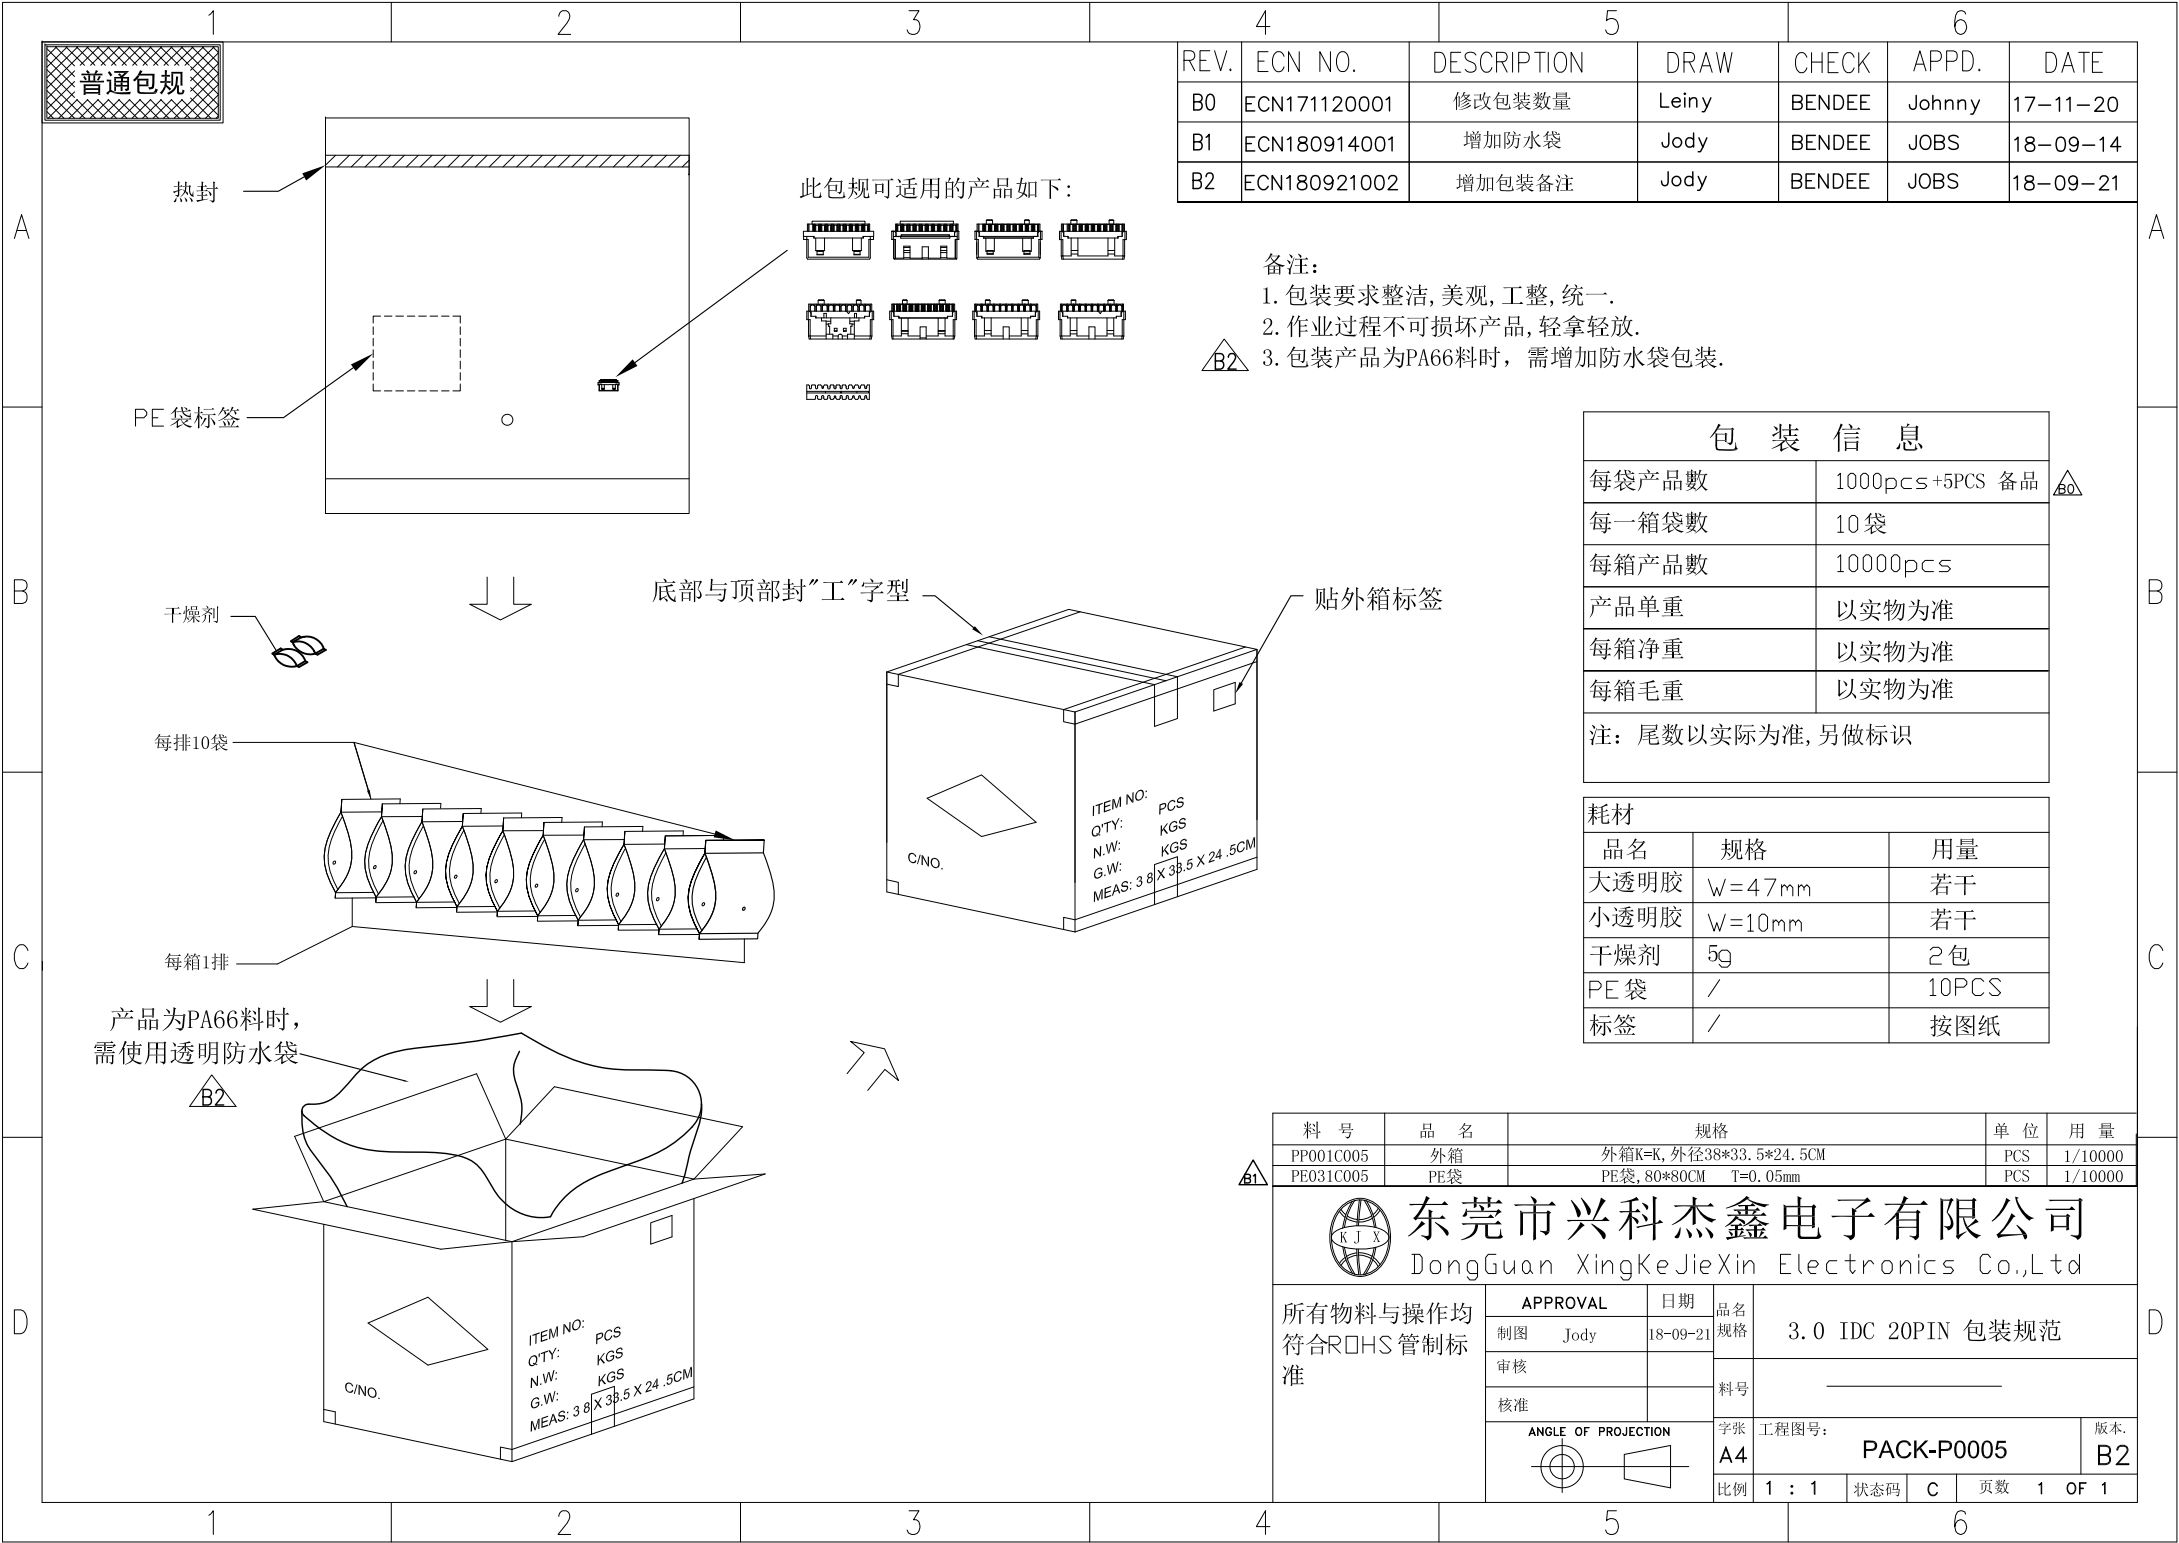

1

2

3

4

5

6

1

2

3

4

5

6

1

2

3

4

5

6

1

2

3

4

5

6



东莞市兴科杰鑫电子有限公司
DongGuan XingKeJieXin Electronics Co.,Ltd