

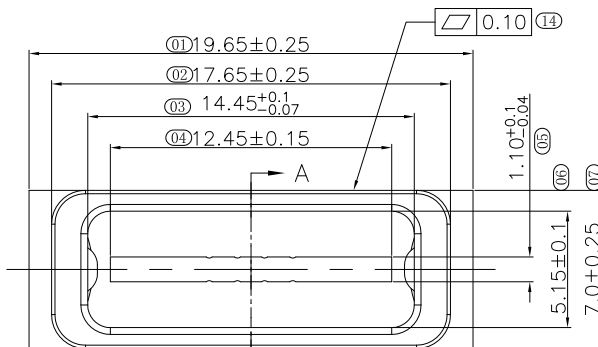
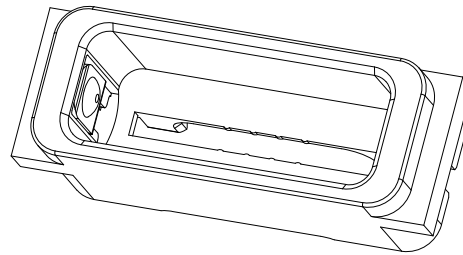


HSF Compliant

REV.	ECN NO.	DESCRIPTION	DRAW	CHECK	APPD.	DATE
A0	—	新版发行	YIN	—	BENDEE	23-04-26
A1	ECN231222001	增加米白色规格	YIN	Linson	Rambo	23-12-22

Specifications:

- Electrical performance:
 - Contact resistance: 30mΩ max
 - Dielectric withstanding voltage: AC 300V(rms).
 - Insulation resistance: 100MΩ min.
 - Contact current rating:
2A for VCC And GND
 - Voltage: 12 Vdc (rms).
- mechanical performance:
 - Mating force: 45N Max
 - Unmating force: 10N Min
 - Durability: 1000 cycles.
- Environmental performance:
 - Temperature range:
3.2 Operating temperature: +5°to+55°.
 - Storage temperature: -20°to+70°.
- Material:
 - Housing: PBT+30%GF See table, UL94V-0.
 - Spring: SUS301, T=0.25mm
- Plating specification:
 - Spring: None plating.
- "**" Shows FAI measurement point.


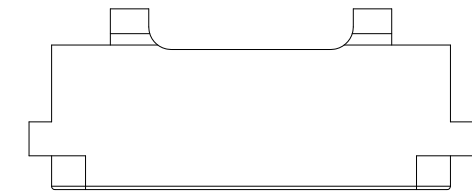


料号备注

CK	0	F	002	B	XX	X	XX	X	X
----	---	---	-----	---	----	---	----	---	---

P=PACK-P0050

00=无电镀	03=PBT米白色 02=PBT灰色8C 01=PBT白 00=PBT黑	R=ROHS2.0标准	B=盐雾24H
--------	---	-------------	---------

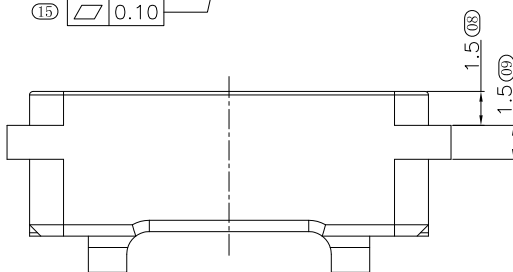

SECTION A-A



东莞市兴科杰鑫电子有限公司
Dong Guan XingKeJieXin Electronics Co.,Ltd

UNLESS OTHERWISE SPECIFIED TOLERANCES		APPROVAL	日期	品名	规格	
X. +/-	METRIC 0.30	制图	YIN	2023.12.22	审核	
.X +/-	0.25	审核			核准	
.XX +/-	0.15	文件位置			料号	
FRACTIONS +/-	2.00'	ANGLE OF PROJECTION			字张	
ANGLES +/-					工程图号:	
DIMENSIONS					DWG-CK0F-002	
(METRIC)	(MM)				版本: A1	
					比例 1 : 1	
					状态码 A	
					页数 1 OF 1	