
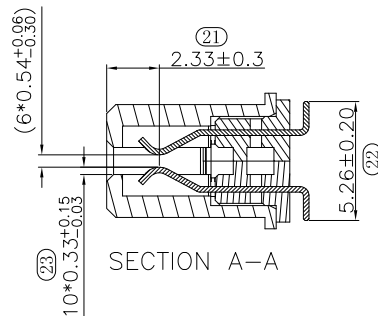
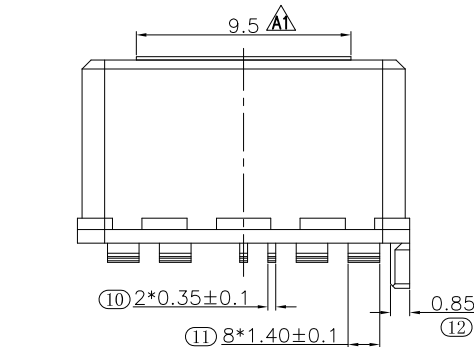
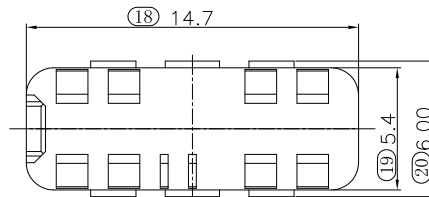
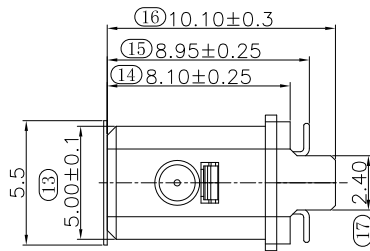
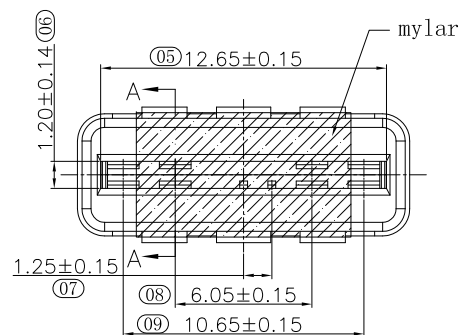
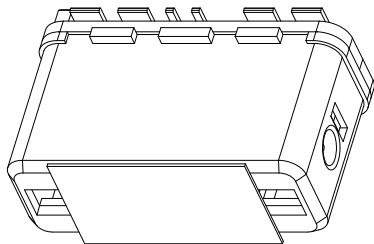


HSF Compliant

REV.	ECN NO.	DESCRIPTION	DRAW	CHECK	APPD.	DATE
A1	ECN230928002	增加麦拉卷装	YIN	—	BENDEE	23-09-28
A2	ECN240301001	改善脱壳:扣孔加大	Yin	Linson	Rambo	24-03-01

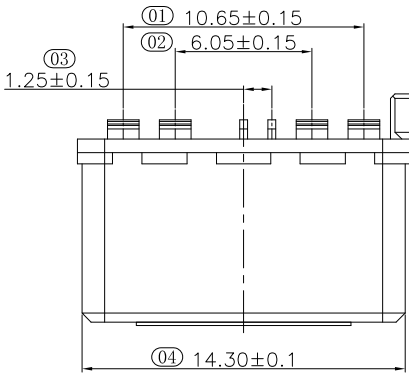

Specifications:

- Electrical performance:
 - Contact resistance: 30mΩ max
 - Dielectric withstanding voltage: AC 300V(rms).
 - Insulation resistance: 100MΩ min.
 - Contact current rating:
2A for VCC And GND
 - Voltage: 12 Vdc (rms).
- mechanical performance:
 - Mating force: 45N Max
 - Unmating force: 10N Min
 - Durability: 1000 cycles.
- Environmental performance:
 - Temperature range:
3.2 Operating temperature: +5°to+55°.
 - Storage temperature: -20°to+70°.
- Material:
 - Housing: LCP Black, UL94V-0.
 - Insert Molding: LCP Black, UL94V-0.
 - Contact: C7025, T=0.25mm
- Plating specification:
 - Contact: Au plated on contact area;
Matte Tin plated 50u"min on solder area;
Nickel 50u"min underplating over all.
- "**" Shows FAI measurement point.

R=PACK-R0325
T=PACK-T0288

料号备注

CK 0 M 006 M XX X XX X X

12=半金雾锡1U"
15=半金雾锡15U"
16=半金雾锡30U"

01=LCP黑+麦拉 reel
00=LCP黑+tray

R=ROHS2.0标准 B=盐雾24H



东莞市兴科杰鑫电子有限公司
Dong Guan XingKeJieXin Electronics Co.,Ltd

UNLESS OTHERWISE SPECIFIED TOLERANCES		APPROVAL	日期	品名规格	风扇线端插头SMT式	
X. +/-	METRIC 0.30	制图 YIN	2024.03.01			
.X +/-	0.25	审核				
.XX +/-	0.15	核准		料号	SEE TABLE	
FRACTIONS +/-	2.00'	文件位置		字张	工程图号:	版本.
ANGLES +/-		ANGLE OF PROJECTION		A4	DWG-CKOM-006	A2
DIMENSIONS				比例	1 : 1	状态码 A
(METRIC)	(MM)				页数	1 OF 1