

REV.	ECN NO.	DESCRIPTION	DRAW	CHECK	APPD.	DATE
A0		新版发行	Erica	Linson	Rambo	

Notes:

1.Material:

Housing: Thermoplastic UL 94V-0 , Black

Contact: Copper Alloy

2.Finish: Plating Selective Gold

3.Specification

Current Rating: 7A

Instant Current: 10A

Contact Resistance: 30mΩ

Insulation Resistance: 100MΩ

Dielectric Voltage: 500V

Operating Temperature: -40°C ~105°C

料号备注									
C3	0	F	002	D	XX	X	XX	X	X
G1=全金G/F									
G2=全金2u"									
G3=全金5u"									
G4=全金10u"									
G5=全金15u"									
G6=全金30u"									
00=LCP 黑				B=ROHS2.0标准			B=盐雾24H		
01=PA6T 黑				W=无卤+ROHS2.0					



东莞市兴科杰鑫电子有限公司

Dong Guan XingKeJieXin Electronics Co.,Ltd

UNLESS OTHERWISE SPECIFIED
TOLERANCES

		METRIC
X.	+/-	0.30
.X	+/-	0.25
.XX	+/-	0.20

FRACTIONS +/-
ANGLES +/-

2.00°

DIMENSIONS

(METRIC)	(MM)
----------	------

APPROVAL

日期

品名
规格

电池座 7P Female PH2.0 180° DIP

制图

Erica

审核

Linson

核准

Rambo

料号

SEE TABLE

文件位置

ANGLE OF PROJECTION



字
A4

工程图号:

DWG-BATTERY F-002

版本
A0

比例






1 : 1

状态码


A

页数

1 OF 1

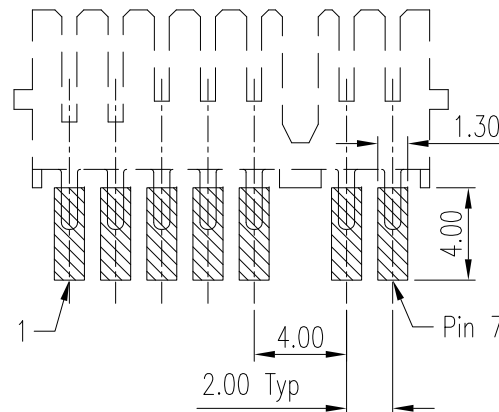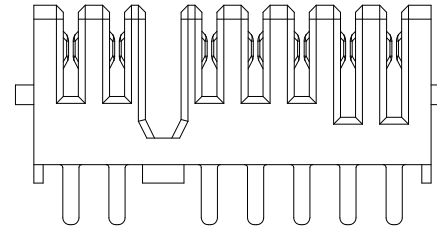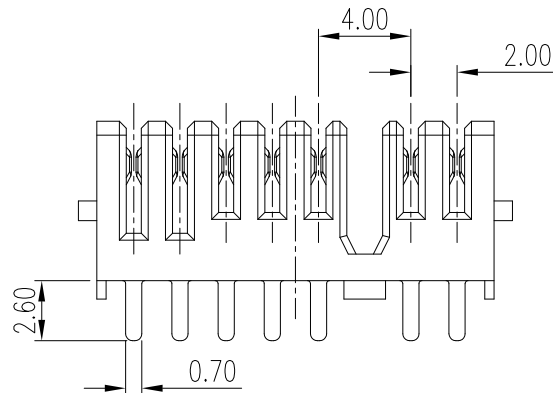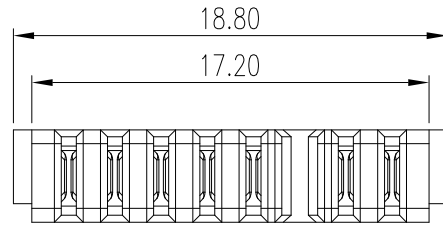

Recommended P.C.Board Layout (1)
Layout Tolerance: ± 0.05 mm

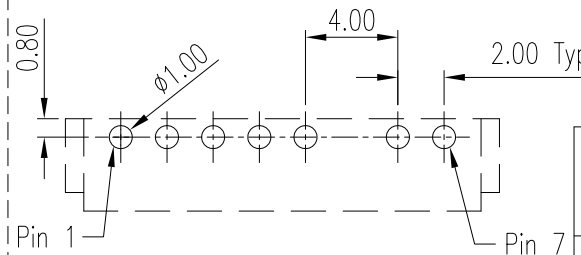

Recommended P.C.Board Layout (2)
Layout Tolerance: ± 0.05 mm