

REV.	ECN NO.	DESCRIPTION	DRAW	CHECK	APPD.	DATE
A0		新版发行	Erica	Linson	Rambo	

NOTES:

1.Material:

Housing: Thermoplastic UL 94V-0 , Black

Contact: Copper Alloy

2.Finish:Plating Gold

3.Specification

Current Rating: 7.0A Max.

Instant Current: 10.0A Max.

Contact Resistance: 30m ohm Max.

Insulation Resistance:100M ohm Min.

Dielectric Voltage: 500V

Operating Temperature:-40°C ~ 105°C

料号备注

C3	0	M	003	D	XX	X	XX	X	X
----	---	---	-----	---	----	---	----	---	---

G1=全金G/F

G2=全金2u"

G3=全金5u"

G4=全金10u"

G5=全金15u"

G6=全金30u"

00=LCP 黑

01=PA6T 黑

R=ROHS2.0标准

W=无卤+ROHS2.0





D=盐雾24H



东莞市兴科杰鑫电子有限公司

Dong Guan XingKeJieXin Electronics Co.,Ltd

UNLESS OTHERWISE SPECIFIED TOLERANCES X. +/- METRIC 0.30 .X +/- 0.25 .XX +/- 0.20 FRACTIONS +/- ANGLES +/- 2.00° DIMENSIONS (METRIC) (MM)	APPROVAL	日期	品名规格	电池座 5P Male PH2.0 90° DIP 带鱼叉脚	
	制图 Erica		审核 Linson	SEE TABLE	
	核准 Rambo		文件位置		
	ANGLE OF PROJECTION		字张 A4	工程图号: DWG-BATTERY M-003	版本. A0
			比例 1 : 1	状态码 A	页数 1 OF 1

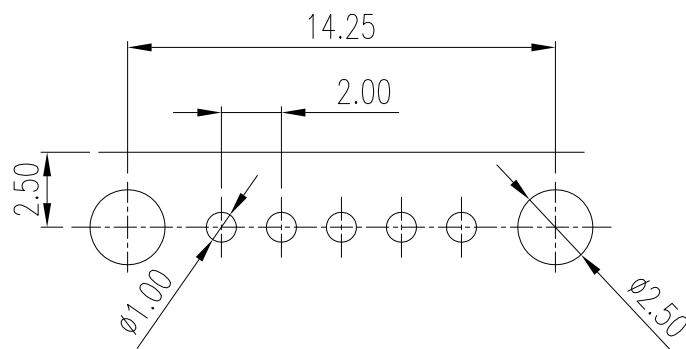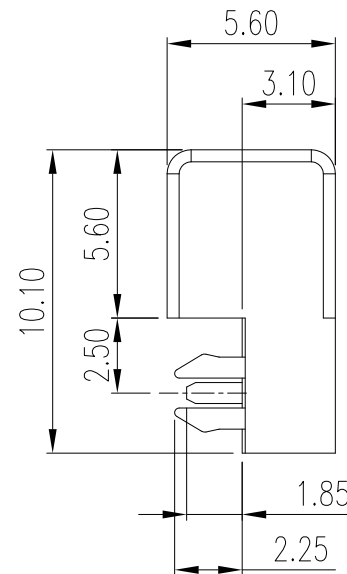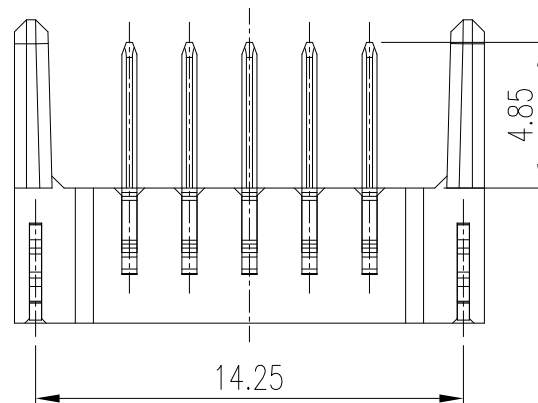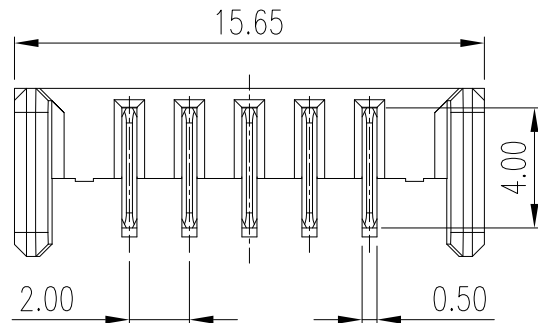

Recommended P.C.Board Layout